RUBICON
LIGHTING

ACTAEON

Features:

- Efficacy Of Up To 130lm/W*
- 40kV Surge Protection
- Adjustable Tilt 270°
- Minimum Lumen Maintenance: 54 000h (L70B10)

Power Supply:	220- 240V AC | 50 - 60Hz
Operating Temperature Range: (Ta - Ambient)	-40°C to 60°C
Colour Rendering Index:	CRI 80+
Colour Consistency:	3-Step MacAdam
Colour Temperature: (Kelvin / CCT)	3000K 5000K 4000K
Beam Angle:	25° _ 60° _ 90° _ 85° x 150°
Installation Types:	Surface Mounted
Ingress Protection:	IP66
IK Rating:	IK08
Luminaire Colour:	Grey
Material:	Housing - Powder coated aluminium alloy

Dimensions	Wattage (System)	CRI	Kelvin	Luminous Flux (Effective)
314mm x 266mm x 87mm	150W	80+	5000K	19500Lm*
402mm x 266mm x 87mm	200W	80+	5000K	26000Lm*
490mm x 266mm x 87mm	250W	80+	5000K	31200Lm*
578mm x 266mm x 87mm	300W	80+	5000K	39000Lm*
430mm x 537mm x 87mm	400W	80+	5000K	52000Lm*
518mm x 537mm x 87mm	480W	80+	5000K	62400Lm*
606mm x 537mm x 87mm	600W	80+	5000K	78000Lm*
726mm x 537mm x 87mm	800W	80+	5000K	104000Lm*
958mm x 537mm x 87mm	960W	80+	5000K	124800Lm*

E & O.E (Errors And Omissions Excepted)

Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.

All lumen outputs stated above are based a nominal output that included a 10% light loss, this can vary depending on the optic used.

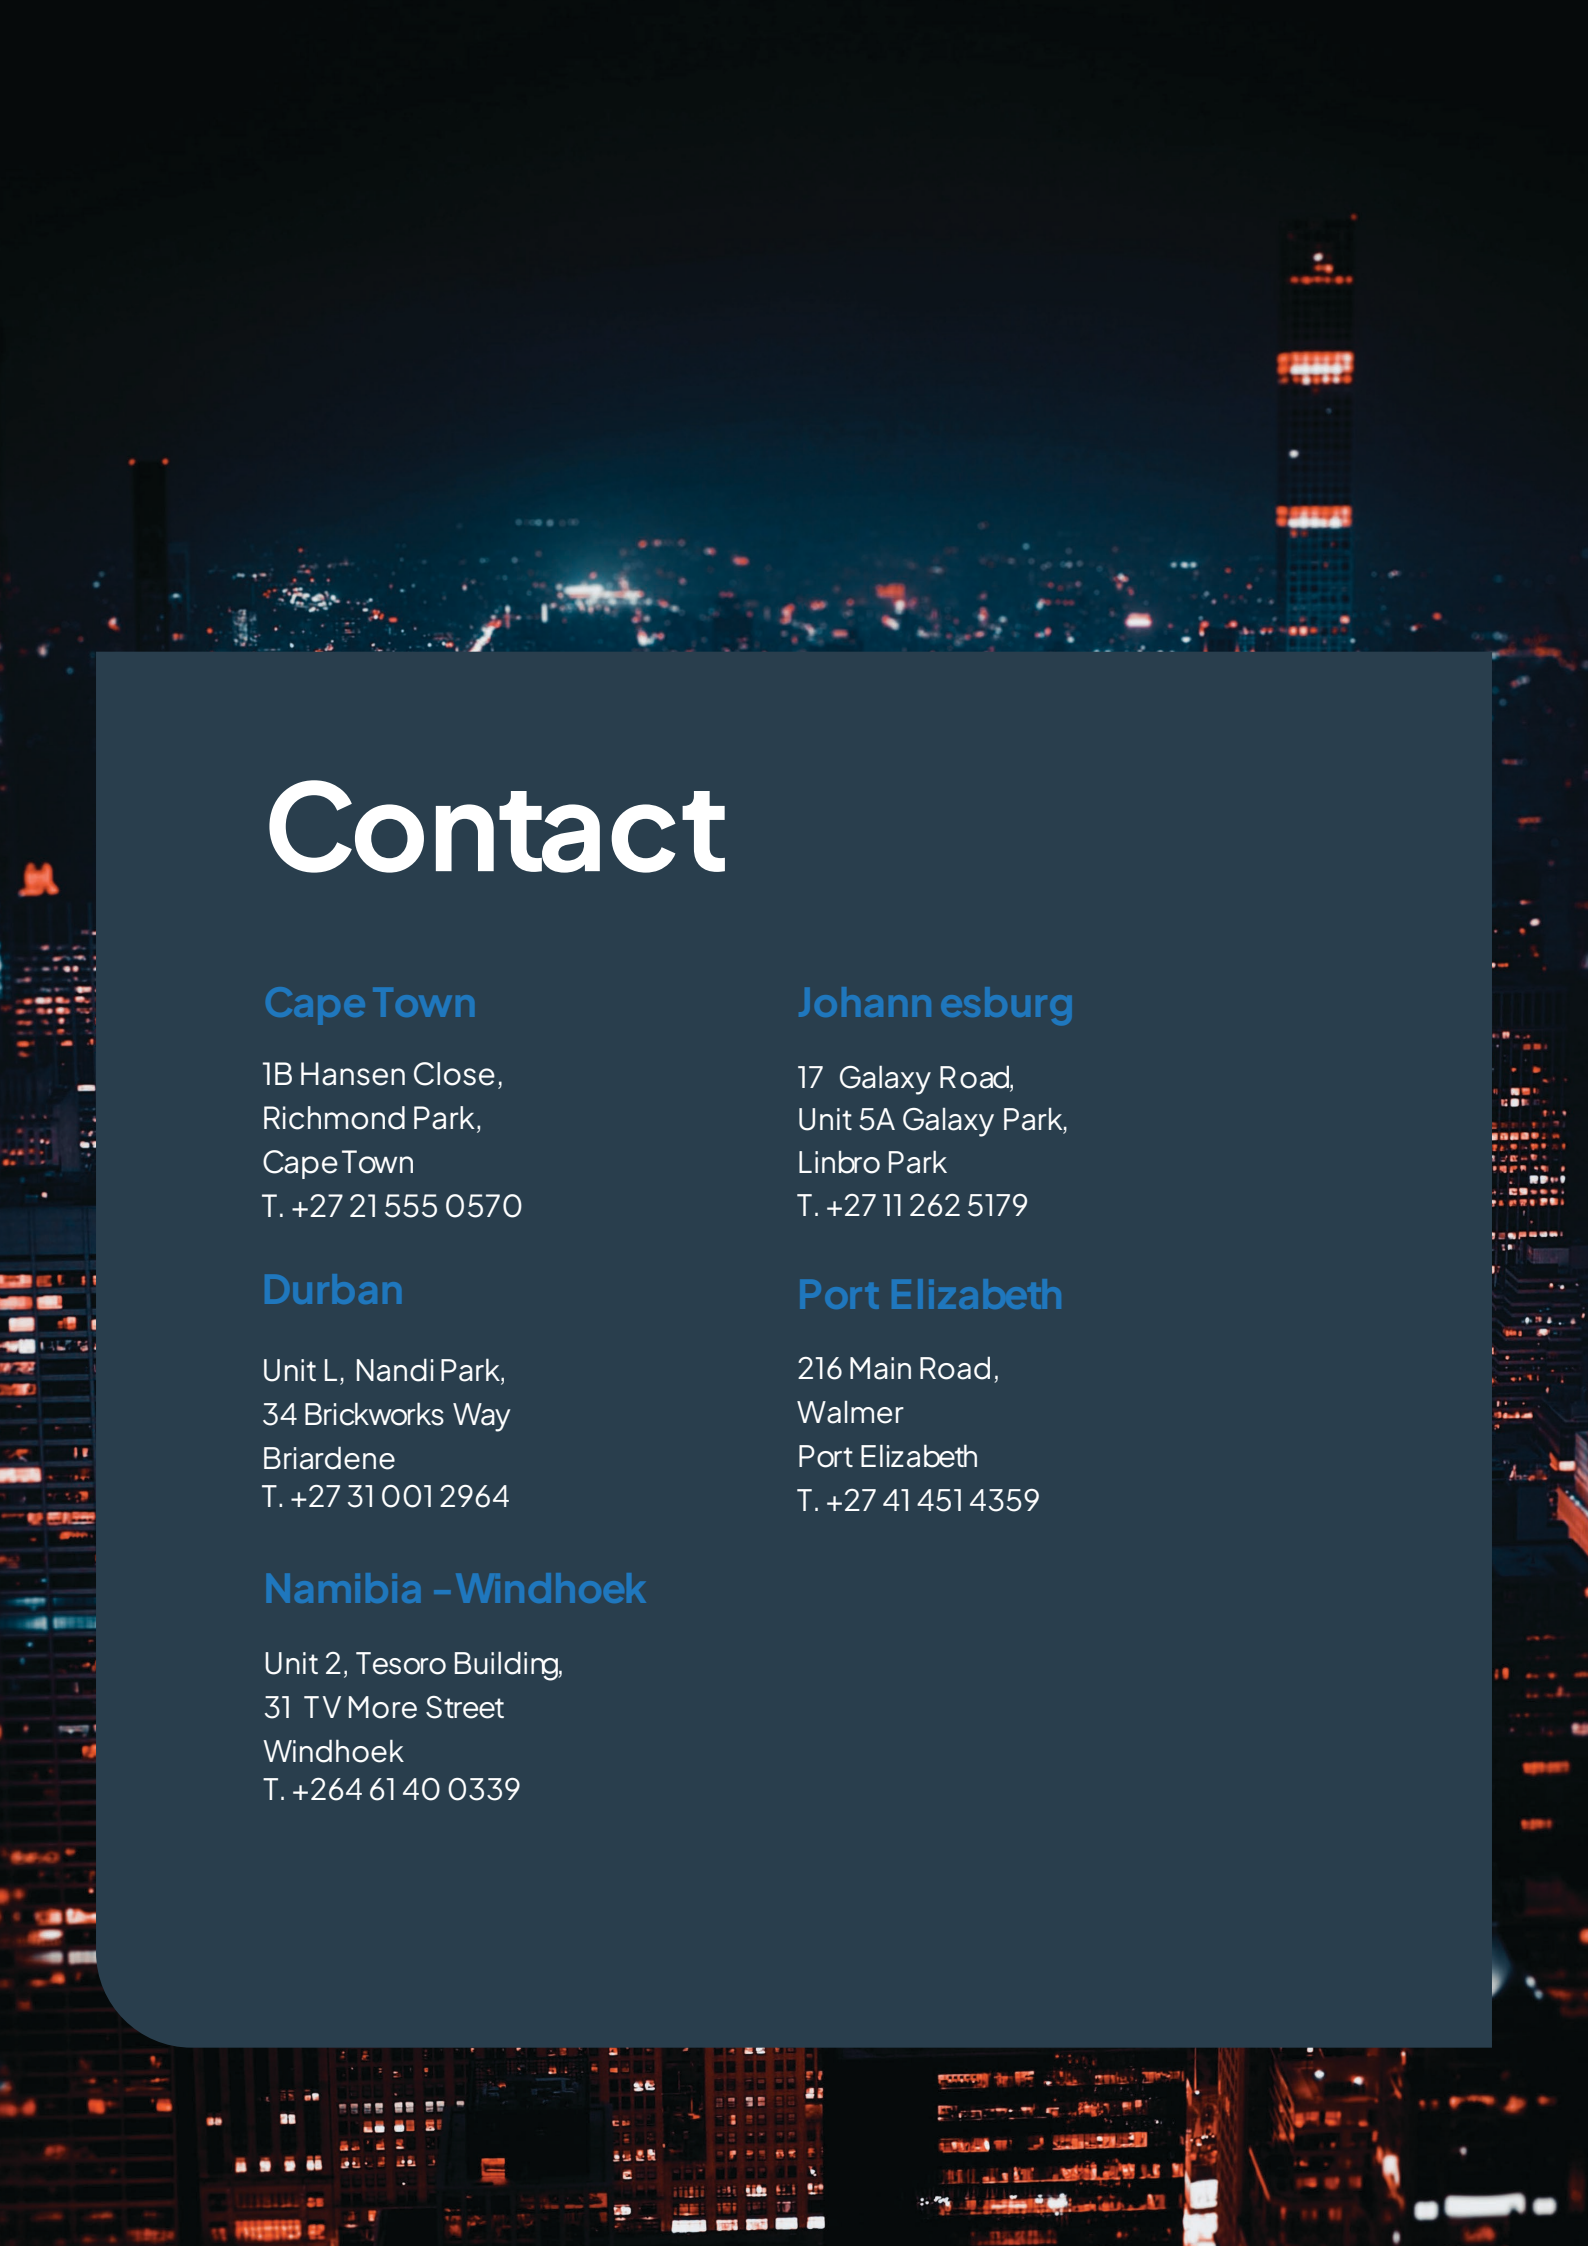

Contact

Cape Town

1B Hansen Close,
Richmond Park,
Cape Town
T. +27 21 555 0570

Johannesburg

17 Galaxy Road,
Unit 5A Galaxy Park,
Linbro Park
T. +27 11 262 5179

Durban

Unit L, Nandi Park,
34 Brickworks Way
Briardene
T. +27 31 001 2964

Port Elizabeth

216 Main Road,
Walmer
Port Elizabeth
T. +27 41 451 4359

Namibia - Windhoek

Unit 2, Tesoro Building,
31 TV More Street
Windhoek
T. +264 61 40 0339