

RUBICON
LIGHTING

CARET DOUBLE





Features:

- Non-Maintained Operation
- Emergency Test Button Provided
- Customisable Signage
- Double Sided
- Minimum Lumen Maintenance 50 000h (L80B10)



Power Supply:	220 - 240V AC 50 - 60Hz		
Duration:	3 Hours 100% Output		
Battery Type:	Nickel-Cadmium		
Legend Height:	140mm		
Installation Types:	Surface Ceiling Mounted		
Ingress Protection:	IP20		
	Dimensions	Wattage (System)	Luminous Flux (Effective)
	340mm x 150mm x 23mm	4W	400Lm*

Available in Right (R) or Left (L) arrow directions



RMU/(R or L)



RMDU/(R or L)



RM/(R or L)




RMDD/(R or L)



RMD/(R or L)

Dimensions:

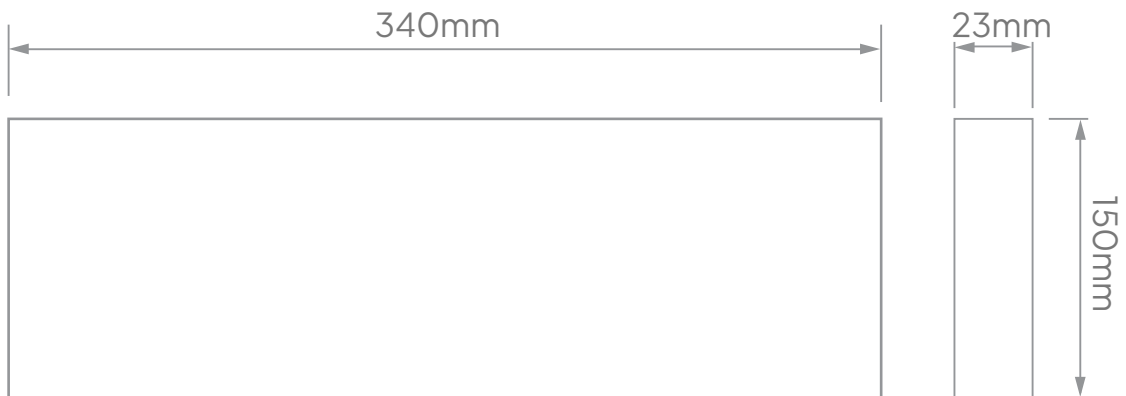

*E & O.E (Errors And Omissions Excepted)

*Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.

*All lumen outputs stated above are based a nominal output that included a 10% light loss, this can vary depending on the optic used.

Contact

Cape Town

1B Hansen Close,
Richmond Park,
Cape Town
T. +27 21 555 0570

Durban

Unit L, Nandi Park,
34 Brickworks Way
Briardene
T. +27 31 001 2964

Namibia – Windhoek

Unit 2, Tesoro Building,
31 TV More Street
Windhoek
T. +264 61 40 0339

Johannesburg

17 Galaxy Road,
Unit 5A Galaxy Park,
Linbro Park
T. +27 11 262 5179

Port Elizabeth

216 Main Road,
Walmer
Port Elizabeth
T. +27 41 451 4359