

RUBICON
LIGHTING

**COLT MINI
STANDARD**





Features:

- New Gen-6 COB
- Passive Cooling
- Tilt And Rotate Action
- Supplied With Protective Glass
- Minimum Lumen Maintenance: 50 000h (L80B10)


| | | | | | | |
|---|--|-------|-------------------------|------------|---------------|----------------------------------|
| Power Supply: | 220-240V AC 50 - 60Hz | | | | | |
| Operating Temperature Range: (Ta - Ambient) | - 20°C to 35°C | | | | | |
| Dimming: | Dali (On Request) | | | | | |
| Colour Rendering Index: | CRI 80+ _ CRI 90+ | | | | | |
| Colour Consistency: | 2-Step MacAdam | | | | | |
| Colour Temperature: (Kelvin / CCT) | 2700K 3500K 5000K 3000K 4000K | | | | | |
| Beam Angle: | 15° _ 20° _ 30° _ 50° | | | | | |
| Installation Type: | 3-Phase Track | | | | | |
| Ingress Protection: | IP20 | | | | | |
| Luminaire Colour: | <input type="radio"/> White <input checked="" type="radio"/> Black <input type="radio"/> Silver | | | | | |
| Material: | Body - Powder coated die-cast aluminium Driver Housing - Thermoplastic | | | | | |
| | Dimensions | | Wattage (System) | CRI | Kelvin | Luminous Flux (Effective) |
| | 195mm x 170mm x 85mm | 450mA | 17W | 80+ | 3000K | 2425Lm* |
| | 195mm x 170mm x 85mm | 450mA | 17W | 90+ | 4000K | 2125Lm* |
| | 195mm x 170mm x 85mm | 650mA | 25W | 80+ | 3000K | 3350Lm* |
| | 195mm x 170mm x 85mm | 650mA | 25W | 90+ | 4000K | 2925Lm* |
| | 195mm x 170mm x 85mm | 900mA | 35W | 80+ | 3000K | 4300Lm* |
| | 195mm x 170mm x 85mm | 900mA | 35W | 90+ | 4000K | 3750Lm* |

*E & O.E (Errors And Omissions Excepted)

*Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.

*All lumen outputs stated above are based a nominal output that included a 10% light loss, this can vary depending on the optic used.

Dimensions:

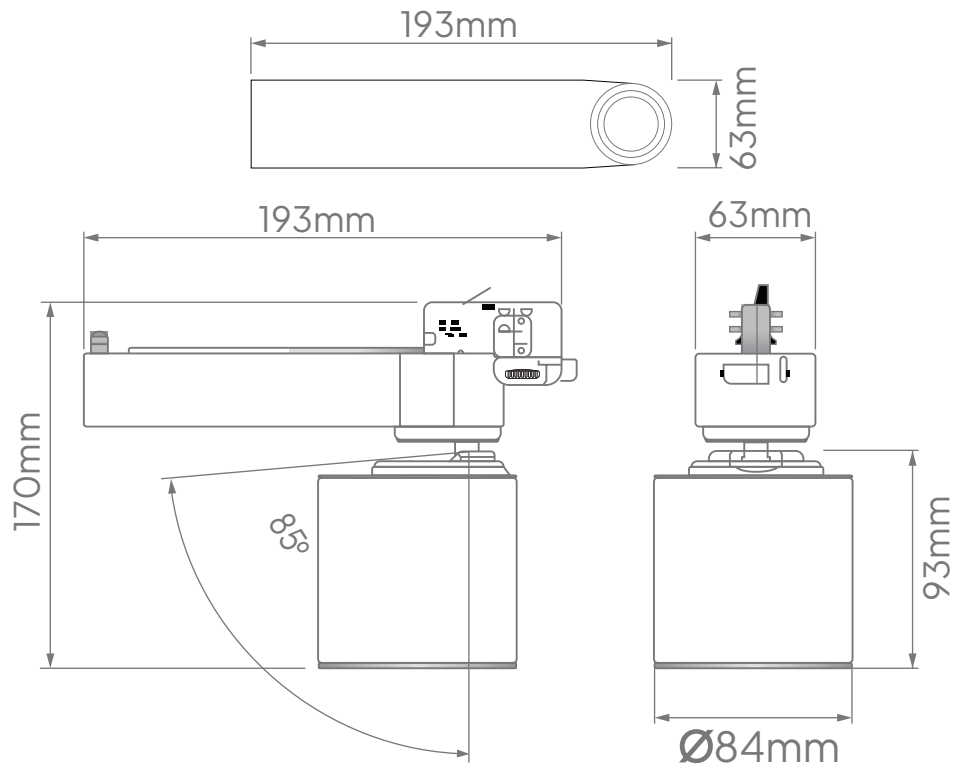

*E & O.E (Errors And Omissions Excepted)

*Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.

*All lumen outputs stated above are based a nominal output that included a 10% light loss, this can vary depending on the optic used.

Contact

Cape Town

1B Hansen Close,
Richmond Park,
Cape Town
T. +27 21 555 0570

Durban

Unit L, Nandi Park,
34 Brickworks Way
Briardene
T. +27 31 001 2964

Namibia – Windhoek

Unit 2, Tesoro Building,
31 TV More Street
Windhoek
T. +264 61 40 0339

Johannesburg

17 Galaxy Road,
Unit 5A Galaxy Park,
Linbro Park
T. +27 11 262 5179

Port Elizabeth

216 Main Road,
Walmer
Port Elizabeth
T. +27 41 451 4359