

RUBICON
LIGHTING

DRACONIS 80





Features:

- No Flicker
- Efficacy Of Up To 100Lm/W*
- Remote Driver
- Tunable White
- Colour Coded Ceiling Cups (On Request)
- Minimum Lumen Maintenance: 50 000h (L80B20)



Power Supply:	207 - 253V AC 50 - 60Hz				
Operating Temperature Range: (Ta - Ambient)	-20°C to 35°C				
Colour Rendering Index:	CRI 80+ _ CRI 90+_ CRI 95+				
Dimming:	Dali (On Request)				
Colour Consistency:	3-Step MacAdam				
Colour Temperature: (Kelvin / CCT)	<input type="radio"/> 3000K <input type="radio"/> 6000K <input type="radio"/> 4000K		Tunable White <input type="radio"/> 2700K - <input type="radio"/> 5700K		
Beam Angle:	110°				
Installation Type:	Suspension (Ceiling Cups On Request)				
Ingress Protection:	IP20				
IK Rating:	IK06				
Luminaire Colour:	<input type="radio"/> White <input checked="" type="radio"/> Black <input type="radio"/> Custom Colours Available (On Request)				
Material:	Body - Powder coated laser cut and roll formed mild steel Diffuser - 3mm Opalized PMMA				
	Dimensions	Wattage (System)	CRI	Kelvin	Luminous Flux (Effective)
	Ø300mm x 80mm	4.8W	80+	4000K	600Lm*
	Ø450mm x 80mm	12W	80+	4000K	1500Lm*
	Ø600mm x 80mm	24W	80+	4000K	3000Lm*
	Ø800mm x 80mm	39W	80+	4000K	4860Lm*
	Ø1000mm x 80mm	68W	80+	4000K	8400Lm*
	Ø1200mm x 80mm	92W	80+	4000K	11400Lm*
	Ø1500mm x 80mm	149W	80+	4000K	18600Lm*


*Please note the values stated above will differ when the tunable white setting is used.

*E & O.E (Errors And Omissions Excepted)

*Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.


*All lumen outputs stated above are based a nominal output that included a 10% light loss, this can vary depending on the optic used.

Light Distribution:



110°

Dimensions:

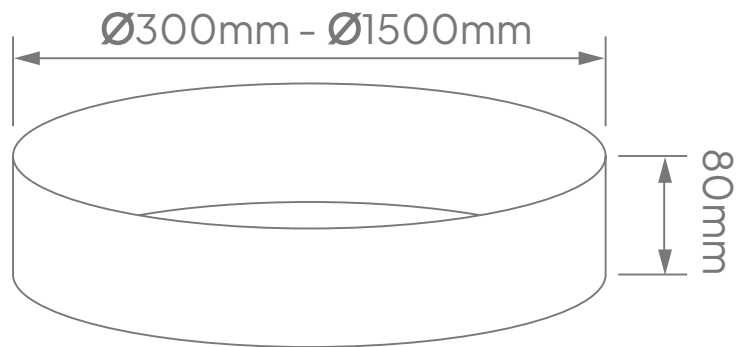

*E & O.E (Errors And Omissions Excepted)

*Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.

*All lumen outputs stated above are based a nominal output that included a 10% light loss, this can vary depending on the optic used.

Contact

Cape Town

1B Hansen Close,
Richmond Park,
Cape Town
T. +27 21 555 0570

Durban

Unit L, Nandi Park,
34 Brickworks Way
Briardene
T. +27 31 001 2964

Namibia – Windhoek

Unit 2, Tesoro Building,
31 TV More Street
Windhoek
T. +264 61 40 0339

Johannesburg

17 Galaxy Road,
Unit 5A Galaxy Park,
Linbro Park
T. +27 11 262 5179

Port Elizabeth

216 Main Road,
Walmer
Port Elizabeth
T. +27 41 451 4359