


# RUBICON

LIGHTING

## EDO



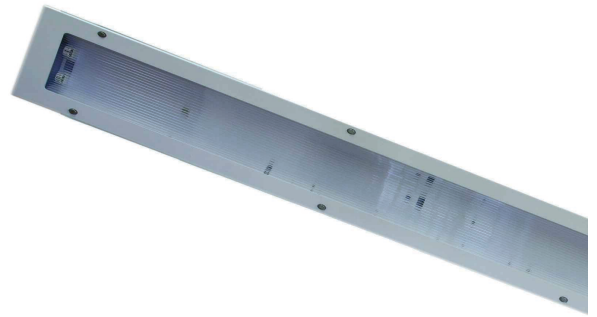

**Features:**

- Suitable For Use In Prison Cell Subway, Magistrate/Police Holding Cells, Railway Stations And Small Factories
- Vandal Resistant Screws
- Night Light Option
- Emergency Back-Up Option Available (On Request)
- SABS Certified Complying With SABS/IEC 60598
- Minimum Lumen Maintenance: 50 000h (L70B50)


<b>Power Supply:</b>	220-240V AC   50 - 60Hz				
<b>Operating Temperature Range:</b> (Ta - Ambient)	- 20°C to 35°C				
<b>Module:</b>	T8 Lamps				
<b>Colour Consistency:</b>	4-Step MacAdam				
<b>Colour Temperature:</b> (Kelvin / CCT)	<input checked="" type="radio"/> 5000K				
<b>Beam Angle:</b>	110°				
<b>Installation Type:</b>	Surface Mounted				
<b>Ingress Protection:</b>	IP66				
<b>IK Rating:</b>	IK08				
<b>Luminaire Colour:</b>	<input checked="" type="radio"/> Grey				
<b>Material:</b>	Housing - Powder Coated 304 Or 316 Stainless Steel Body Diffuser - Clear Polycarbonate				
	<b>Dimensions</b>	<b>Wattage (System)</b>	<b>CRI</b>	<b>Kelvin</b>	<b>Lamp</b>
	686mm x 200mm x 90mm	35W	70+	5000K	2x 11W CFL
	686mm x 200mm x 90mm	52W	70+	5000K	2x 18W
	686mm x 200mm x 90mm	60W	70+	5000K	2x 18W / 1x 9W CFL
	1300mm x 200mm x 90mm	41W	70+	5000K	1x 36W
	1300mm x 200mm x 90mm	89W	70+	5000K	2x 36W
	1300mm x 200mm x 90mm	98W	70+	5000K	2x 36W / 1x 9W CFL
	1600mm x 200mm x 90mm	63W	70+	5000K	1x 58W
	1600mm x 200mm x 90mm	156W	70+	5000K	2x 58W
	1600mm x 200mm x 90mm	165W	70+	5000K	2x 58W / 1x 9W CFL

\*E & O.E (Errors And Omissions Excepted)


\*Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.

\*All lumen outputs stated above are based a nominal output that included a 10% light loss, this can vary depending on the optic used.

**Dimensions:**

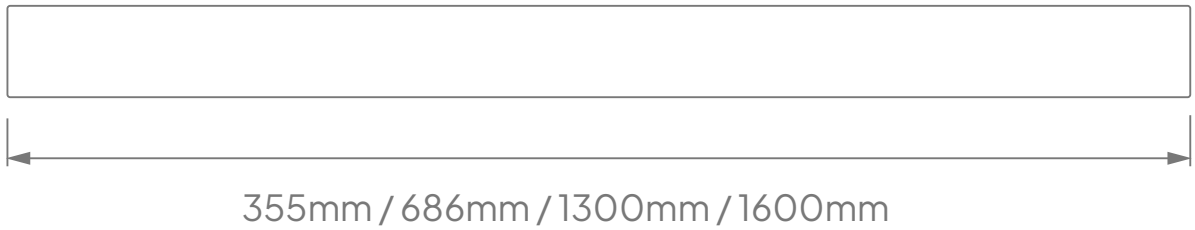

\*NL - With Night Light

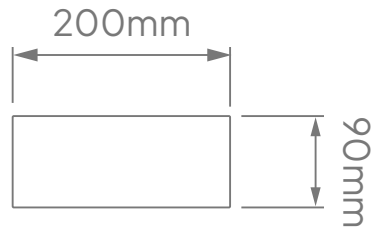

\*E & O.E (Errors And Omissions Excepted)

\*Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.

\*All lumen outputs stated above are based a nominal output that included a 10% light loss, this can vary depending on the optic used.

# Contact

## Cape Town

1B Hansen Close,  
Richmond Park,  
Cape Town  
T. +27 21 555 0570

## Durban

Unit L, Nandi Park,  
34 Brickworks Way  
Briardene  
T. +27 31 001 2964

## Namibia – Windhoek

Unit 2, Tesoro Building,  
31 TV More Street  
Windhoek  
T. +264 61 40 0339

## Johannesburg

17 Galaxy Road,  
Unit 5A Galaxy Park,  
Linbro Park  
T. +27 11 262 5179

## Port Elizabeth

216 Main Road,  
Walmer  
Port Elizabeth  
T. +27 41 451 4359