

RUBICON
LIGHTING

LEAN 153





Features:

- New Gen-6 COB
- Passive Cooling
- Tilt And Rotate Action
- Supplied With Protective Glass
- Bluetooth Control Option Available (On Request)
- Emergency Backup Option Available (On Request)
- Adjustable mA Driver (Dip Switches)
- Supplied With Protective Glass
- Minimum Lumen Maintenance: 50 000h (L80B10)




Power Supply:	220-240V AC 50 - 60Hz				
Operating Temperature Range: (Ta - Ambient)	- 20°C to 35°C				
Dimming:	Dali_1-10V (On Request)				
Colour Rendering Index:	CRI 80+ _ CRI 90+ _ CRI 97+ _				
Colour Consistency:	2-Step MacAdam				
Colour Temperature: (Kelvin / CCT)	● 2700K ● 3500K ● 5000K ● 3000K ● 4000K				
Beam Angle:	15° _ 20° _ 30° _ 50°				
Installation Type:	Recessed, Ceiling Mounted Luminaire				
Ingress Protection:	IP20				
Luminaire Colour:	<input type="radio"/> White <input checked="" type="radio"/> Black <input type="radio"/> Silver				
Material:	Housing - Powder Coated Aluminium				
	Dimensions	Wattage (System)	CRI	Kelvin	Luminous Flux (Effective)
	Ø164mm x 86mm (Ø153mm Cutout)	17W	80+	3000K	2425Lm*
	Ø164mm x 86mm (Ø153mm Cutout)	17W	80+	4000K	2500Lm*
	Ø164mm x 86mm (Ø153mm Cutout)	17W	90+	3500K	2000Lm*
	Ø164mm x 86mm (Ø153mm Cutout)	25W	80+	3000K	3350Lm*
	Ø164mm x 86mm (Ø153mm Cutout)	25W	80+	4000K	3450Lm*
	Ø164mm x 86mm (Ø153mm Cutout)	25W	90+	3500K	2750Lm*

*E & O.E (Errors And Omissions Excepted)

*Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.

*All lumen outputs stated above are based a nominal output that included a 10% light loss, this can vary depending on the optic used.

Dimensions:

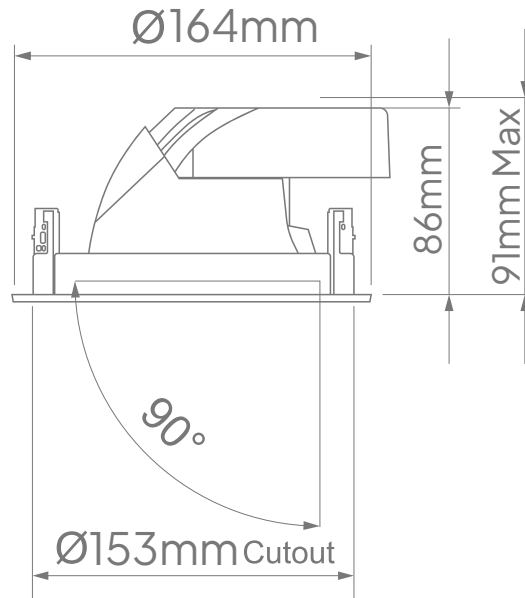

*E & O.E (Errors And Omissions Excepted)

*Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.

*All lumen outputs stated above are based a nominal output that included a 10% light loss, this can vary depending on the optic used.

Contact

Cape Town

1B Hansen Close,
Richmond Park,
Cape Town
T. +27 21 555 0570

Durban

Unit L, Nandi Park,
34 Brickworks Way
Briardene
T. +27 31 001 2964

Namibia – Windhoek

Unit 2, Tesoro Building,
31 TV More Street
Windhoek
T. +264 61 40 0339

Johannesburg

17 Galaxy Road,
Unit 5A Galaxy Park,
Linbro Park
T. +27 11 262 5179

Port Elizabeth

216 Main Road,
Walmer
Port Elizabeth
T. +27 41 451 4359