

**RUBICON**  
LIGHTING

**LEAN 180**





**Features:**

- New Gen-6 COB
- Passive Cooling
- Tilt And Rotate Action
- Supplied With Protective Glass
- Bluetooth Control Option Available (On Request)
- Emergency Backup Option Available (On Request)
- Adjustable mA Driver (Dip Switches)
- Supplied With Protective Glass
- Minimum Lumen Maintenance: 50 000h (L80B10)




<b>Power Supply:</b>	220-240V AC   50 - 60Hz				
<b>Operating Temperature Range:</b> (Ta - Ambient)	- 20°C to 35°C				
<b>Dimming:</b>	Dali_1-10V (On Request)				
<b>Colour Rendering Index:</b>	CRI 80+ _ CRI 90+ _ CRI 97+ _				
<b>Colour Consistency:</b>	2-Step MacAdam				
<b>Colour Temperature:</b> (Kelvin / CCT)	<span style="display: inline-block; width: 10px; height: 10px; background-color: #f96; border-radius: 50%; margin-right: 5px;"></span> 2700K <span style="display: inline-block; width: 10px; height: 10px; background-color: #fde725; border-radius: 50%; margin-left: 15px; margin-right: 5px;"></span> 3500K <span style="display: inline-block; width: 10px; height: 10px; background-color: #add8e6; border-radius: 50%; margin-left: 15px; margin-right: 5px;"></span> 5000K <span style="display: inline-block; width: 10px; height: 10px; background-color: #ffeb3b; border-radius: 50%; margin-right: 5px;"></span> 3000K <span style="display: inline-block; width: 10px; height: 10px; background-color: #fff176; border-radius: 50%; margin-left: 15px; margin-right: 5px;"></span> 4000K				
<b>Beam Angle:</b>	20° _ 24° _ 40° _ 60°				
<b>Installation Type:</b>	Recessed, Ceiling Mounted Luminaire				
<b>Ingress Protection:</b>	IP20				
<b>Luminaire Colour:</b>	<input type="radio"/> White <input checked="" type="radio"/> Black <input type="radio"/> Silver				
<b>Material:</b>	Housing - Powder Coated Aluminium				
	<b>Dimensions</b>	<b>Wattage (System)</b>	<b>CRI</b>	<b>Kelvin</b>	<b>Luminous Flux (Effective)</b>
	Ø194mm x 122mm (Ø180mm Cutout)	25W	80+	3000K	3700Lm*
	Ø194mm x 122mm (Ø180mm Cutout)	25W	80+	4000K	3800Lm*
	Ø194mm x 122mm (Ø180mm Cutout)	25W	90+	3500K	3050Lm*
	Ø194mm x 122mm (Ø180mm Cutout)	40W	80+	3000K	5625Lm*
	Ø194mm x 122mm (Ø180mm Cutout)	40W	80+	4000K	5775Lm*
	Ø194mm x 122mm (Ø180mm Cutout)	40W	90+	3500K	4650Lm*

\*E & O.E (Errors And Omissions Excepted)

\*Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.

\*All lumen outputs stated above are based a nominal output that included a 10% light loss, this can vary depending on the optic used.

**Dimensions:**

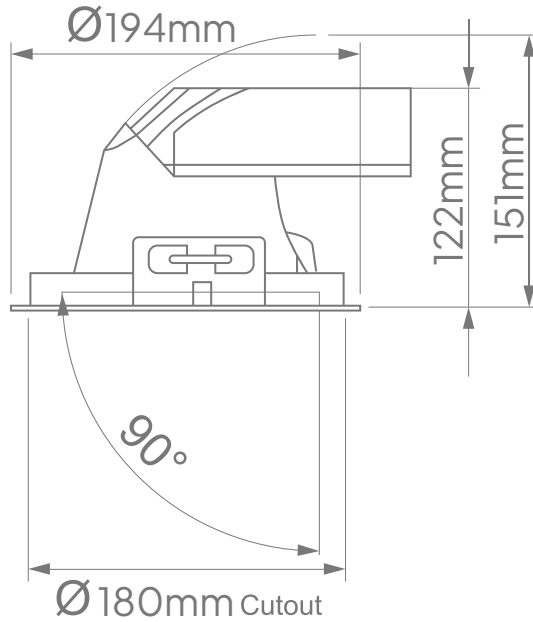

\*E & O.E (Errors And Omissions Excepted)

\*Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.

\*All lumen outputs stated above are based a nominal output that included a 10% light loss, this can vary depending on the optic used.

# Contact

## Cape Town

1B Hansen Close,  
Richmond Park,  
Cape Town  
T. +27 21 555 0570

## Durban

Unit L, Nandi Park,  
34 Brickworks Way  
Briardene  
T. +27 31 001 2964

## Namibia – Windhoek

Unit 2, Tesoro Building,  
31 TV More Street  
Windhoek  
T. +264 61 40 0339

## Johannesburg

17 Galaxy Road,  
Unit 5A Galaxy Park,  
Linbro Park  
T. +27 11 262 5179

## Port Elizabeth

216 Main Road,  
Walmer  
Port Elizabeth  
T. +27 41 451 4359