RUBICON
LIGHTING

LIVIA 225

Features:

- Efficacy Of Up To 124lm/W*
- Inox AISI 316 Stainless Steel
- Coastal Quality
- Minimum Lumen Maintenance: 50 000h (L70B30)

Power Supply:	220-240V AC | 50 - 60Hz
Colour Rendering Index:	CRI 80+
Colour Consistency:	3-Step MacAdam
Colour Temperature: (Kelvin / CCT)	◯ 3000K ◯ 4000K
Beam Angle:	Asymmetrical
Installation Type:	Recessed, Ground
Ingress Protection:	IP67
IK Rating:	IK10
Material:	Body - Stainless Steel Diffuser - Tempered Glass

Dimensions	Wattage (System)	CRI	Kelvin	Luminous Flux (Effective)
Ø225mm x 177mm	24W	80+	3000K	2696Lm*
Ø225mm x 177mm	24W	80+	4000K	2995Lm*

Includes:

Dimensions:

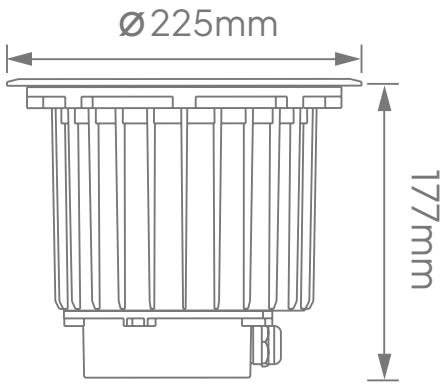

E & O.E (Errors And Omissions Excepted)

Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.

All lumen outputs stated above are based a nominal output that included a 10% light loss, this can vary depending on the optic used.

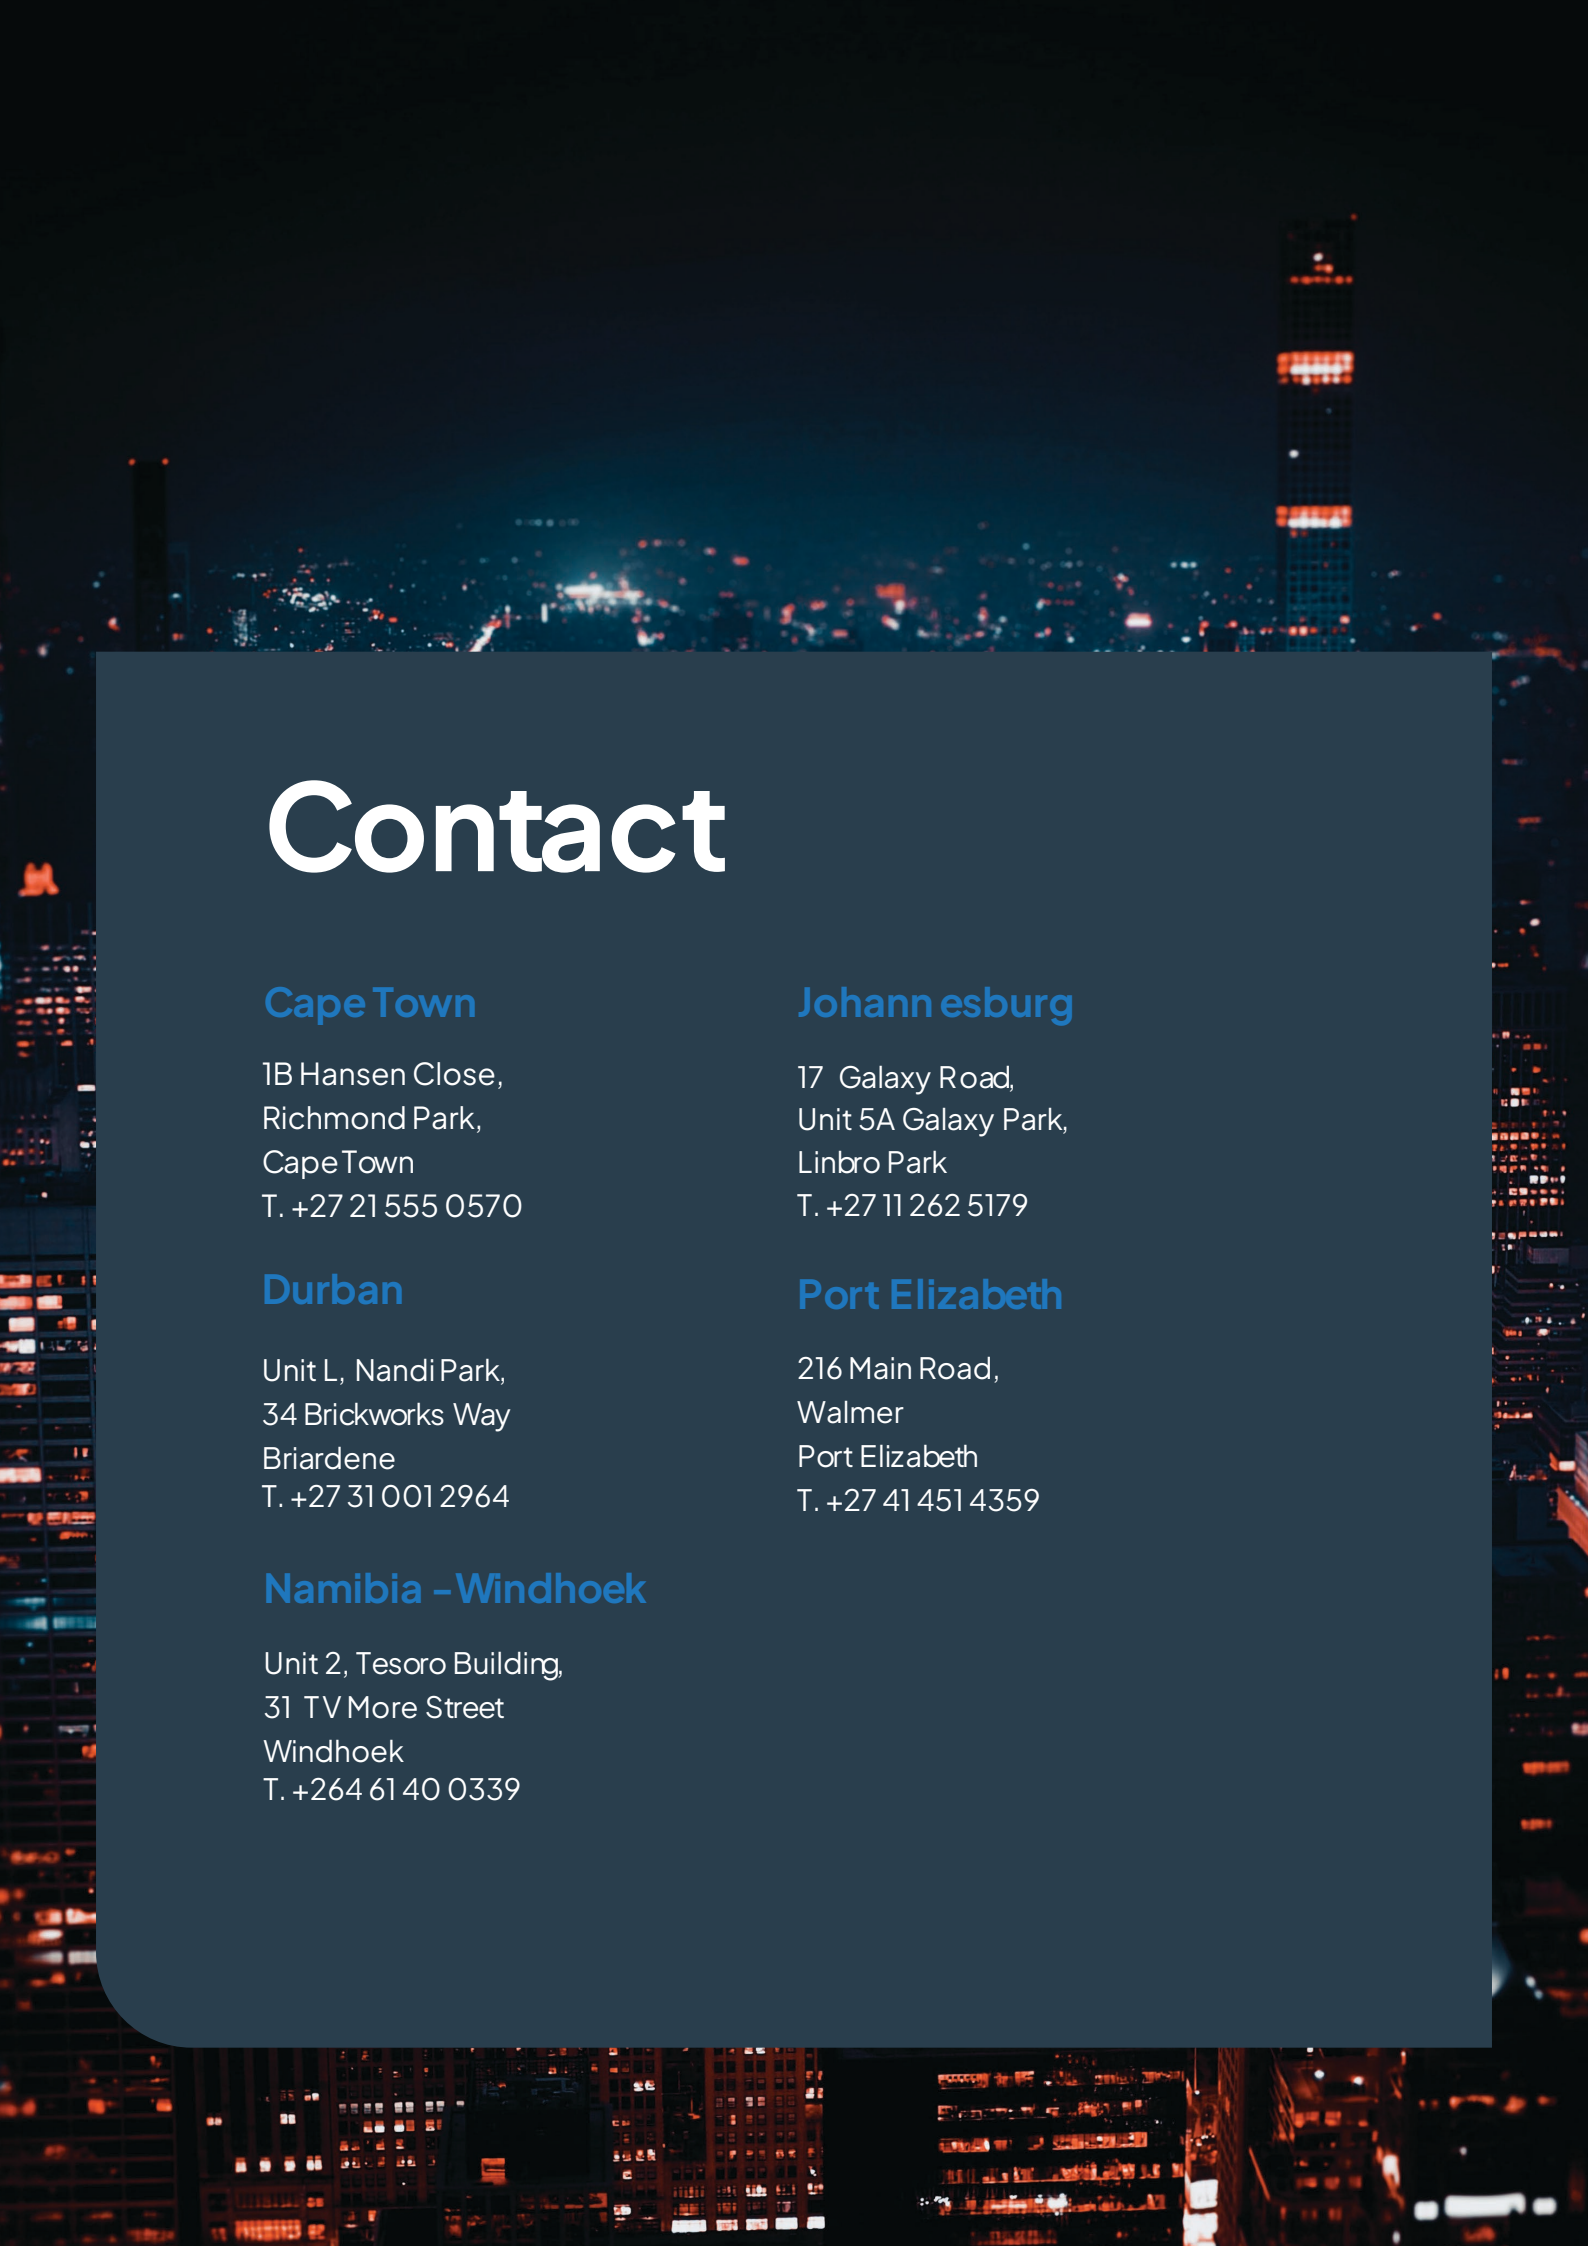

Contact

Cape Town

1B Hansen Close,
Richmond Park,
Cape Town
T. +27 21 555 0570

Johannesburg

17 Galaxy Road,
Unit 5A Galaxy Park,
Linbro Park
T. +27 11 262 5179

Durban

Unit L, Nandi Park,
34 Brickworks Way
Briardene
T. +27 31 001 2964

Port Elizabeth

216 Main Road,
Walmer
Port Elizabeth
T. +27 41 451 4359

Namibia - Windhoek

Unit 2, Tesoro Building,
31 TV More Street
Windhoek
T. +264 61 40 0339