

RUBICON
LIGHTING

MENELAUS






Features:

- High Quality Led Module
- Lithium Battery
- PIR Sensor
- High Efficiency Mono-Silicon Solar Panel
- Patented Pressure-Regulating Device
- 15W Is Ideal For 4-6m Mounting Height
- 30W Is Ideal For 6-8m Mounting Height
- Minimum Lumen Maintenance: 50 000h(L80B10)



Photovoltaic Panels:	Mono-Silicone 30-70Wp				
Operating Temperature Range: (Ta - Ambient)	- 20°C to +70°C				
Battery	12.8V LiFePO4 307-640 Watt-Hour				
Colour Rendering Index:	CRI 80+				
Colour Temperature: (Kelvin / CCT)	● 4000K				
Installation Type:	Pole Mounted				
Ingress Protection:	IP67				
IK Rating:	IK08				
Luminaire Colour:	● Black				
Material:	Die-Cast Aluminium & Powder Coated Steel				
	Dimensions	Wattage (System)	CRI	Kelvin	Luminous Flux (Effective)
	615mm x 357mm x 128mm	15W	80+	4000K	2400Lm*
	846mm x 517mm x 182mm	30W	80+	4000K	4800Lm*

Lighting Control

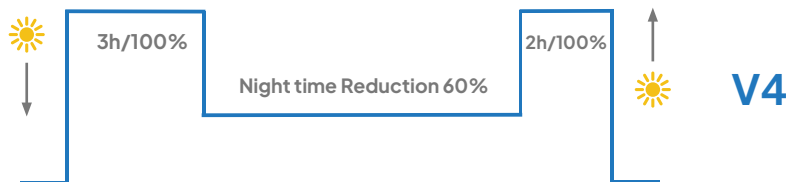

* Project based calculation will be done as per the autonomy time, location and time management required.

*E & O.E (Errors And Omissions Excepted)

*Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.

*All lumen outputs stated above are based a nominal output that included a 10% light loss, this can vary depending on the optic used.

Contact

Cape Town

1B Hansen Close,
Richmond Park,
Cape Town
T. +27 21 555 0570

Durban

Unit L, Nandi Park,
34 Brickworks Way
Briardene
T. +27 31 001 2964

Namibia – Windhoek

Unit 2, Tesoro Building,
31 TV More Street
Windhoek
T. +264 61 40 0339

Johannesburg

17 Galaxy Road,
Unit 5A Galaxy Park,
Linbro Park
T. +27 11 262 5179

Port Elizabeth

216 Main Road,
Walmer
Port Elizabeth
T. +27 41 451 4359