

RUBICON
LIGHTING

PROXIMUS






Features:

- Efficacy Of Up To 170lm/W*
- UGR: <16
- Emergency Backup Option Available (On Request)
- Modular Design
- Easy Installation
- Minimum Lumen Maintenance: 50 000h (L80B10)



Power Supply:	220-240V AC 50 - 60Hz				
Operating Temperature Range: (Ta - Ambient)	- 20°C to +40°C				
Dimming:	Dali_1-10V (On Request)				
Colour Rendering Index:	CRI 80+				
Colour Consistency:	4-Step MacAdam				
Colour Temperature: (Kelvin / CCT)	<input checked="" type="radio"/> 3000K <input type="radio"/> 5000K <input type="radio"/> 4000K				
Beam Angle:	25° _ 60° _ 90° _ Asymmetric _ Double Asymmetric				
Installation Type:	• Surface • Suspension				
Ingress Protection:	IP20				
IK Rating:	IK05				
Luminaire Colour:	<input type="radio"/> White				
Material:	Housing - Powder Coated Extruded Aluminium Diffuser - PMMA				
	Dimensions	Wattage (System)	CRI	Kelvin	Luminous Flux (Effective)
	1500mm x 65mm x 72mm	33W	80+	4000K	5500Lm*
	1500mm x 65mm x 72mm	48W	80+	4000K	8000Lm*
	3000mm x 65mm x 72mm	97W	80+	4000K	16000Lm*
	3000mm x 65mm x 72mm	127W	80+	4000K	21000Lm*

Dimensions:

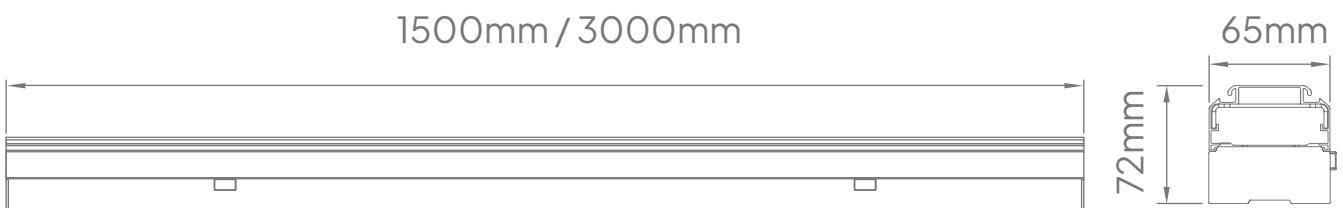

*E & O.E (Errors And Omissions Excepted)

*Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.

*All lumen outputs stated above are based a nominal output that included a 10% light loss, this can vary depending on the optic used.

Contact

Cape Town

1B Hansen Close,
Richmond Park,
Cape Town
T. +27 21 555 0570

Durban

Unit L, Nandi Park,
34 Brickworks Way
Briardene
T. +27 31 001 2964

Namibia – Windhoek

Unit 2, Tesoro Building,
31 TV More Street
Windhoek
T. +264 61 40 0339

Johannesburg

17 Galaxy Road,
Unit 5A Galaxy Park,
Linbro Park
T. +27 11 262 5179

Port Elizabeth

216 Main Road,
Walmer
Port Elizabeth
T. +27 41 451 4359