













Features:

- Efficacy Of Up To 76lm/W*
- Emergency Backup Option Available (On Request)
- Dali Control (On Request)
- Passive Cooling
- High Reflectance Aluminium Reflector
- Minimum Lumen Maintenance: 50 000h (L80B10)



Power Supply:	220-240V AC 50 - 60Hz				
Colour Rendering Index:	CRI 80+ _ CRI 90+				
Colour Consistency:	2-Step MacAdam				
Colour Temperature: (Kelvin / CCT)	○ 3000К ○ 4000К				
Beam Angle:	38°				
Installation Type:	Recessed, Ceiling Mounted Luminaire				
Ingress Protection:	IP43				
Luminaire Colour:	*Please See Below				
Material:	Housing - Powder Coated Aluminium				
	Dimensions	Wattage (System)	CRI	Kelvin	Luminous Flux (Effective)
	Ø170mm x 105mm (Ø150mm Cut-Out)	30W	80+	3000K	3000Lm*
	Ø170mm x 105mm (Ø150mm Cut-Out)	30W	80+	4000K	3240Lm*

Luminaire Colours:




^{*}E & O.E (Errors And Omissions Excepted)

 $^{^* \}textit{Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are}\\$ subject to change without prior notice.

^{*}All lumen outputs stated above are based a nominal output that included a 10% light loss, this can vary depending on the optic used.



Dimensions:

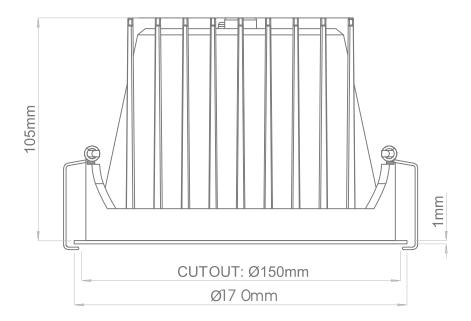

^{*}E & O.E (Errors And Omissions Excepted)

^{*}Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.

 $^{{}^{\}star}\text{All lumen outputs stated above are based a nominal output that included a 10\% light loss, this can vary depending on the optic used.}$



Contact

Cape Town

1B Hansen Close, Richmond Park, Cape Town T. +27 21 555 0570

Durban

Unit L, Nandi Park, 34 Brickworks Way Briardene T. +27 31 001 2964

Namibia - Windhoek

Unit 2, Tesoro Building, 31 TV More Street Windhoek T. +264 61 40 0339

Johann esburg

17 Galaxy Road, Unit 5A Galaxy Park, Linbro Park T. +27 11 262 5179

Port Elizabeth

216 Main Road, Walmer Port Elizabeth T. +27 41 451 4359