


RUBICON
LIGHTING


**THEMISTO
WALL WASHER**



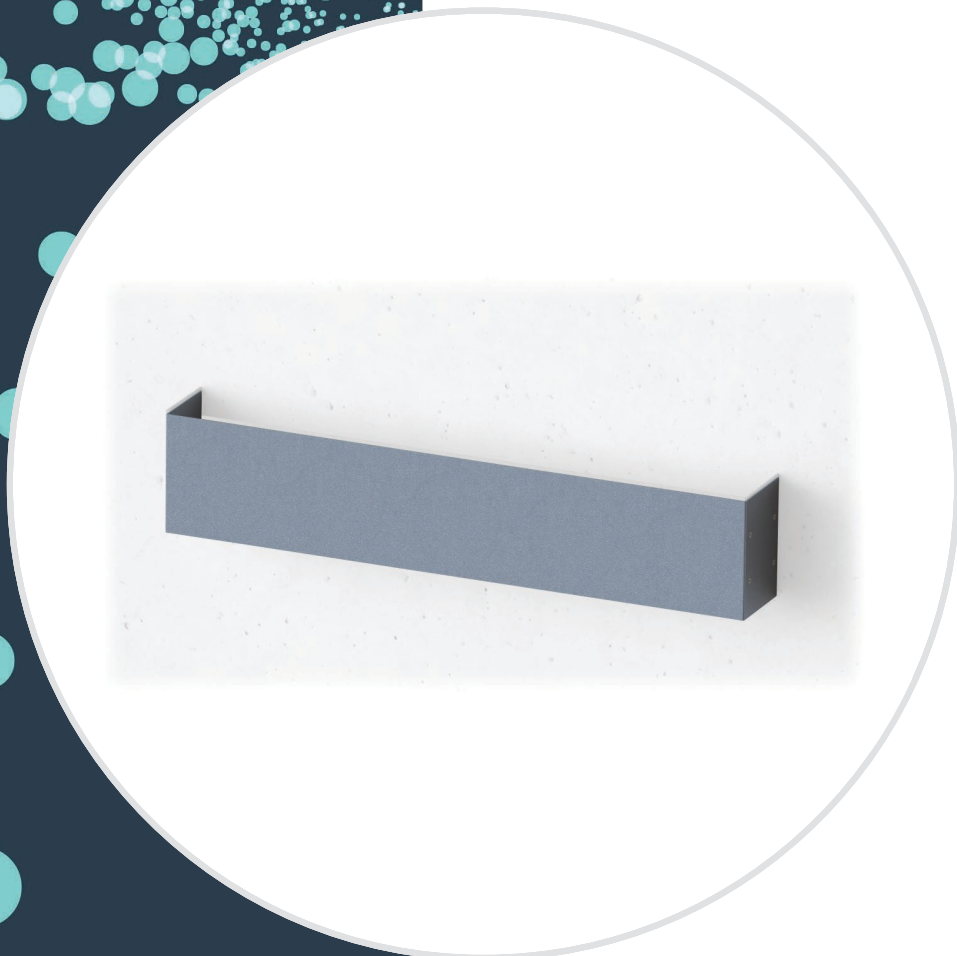


Features:

- Efficacy Of Up To 97lm/W*
- Typical Applications:
 - Decorative
 - Architectural Wall Accent Lighting
- Minimum Lumen Maintenance: 50 000h (L90B10)

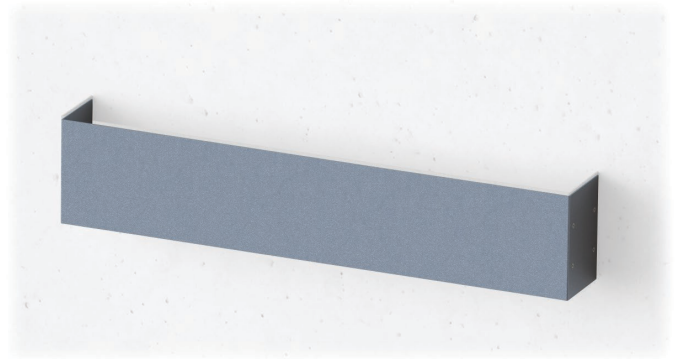

Power Supply:	207 - 253V AC 50 - 60Hz				
Dimming:	Dali_1-10V (On Request)				
Colour Rendering Index:	CRI 80+				
Colour Consistency:	3-Step MacAdam				
Colour Temperature: (Kelvin / CCT)	● 4000K				
Beam Angle:	30° _ 60° _ 90° _ 110°				
Installation Type:	Surface Mounted				
Ingress Protection:	IP44				
IK Rating:	IK04				
Luminaire Colour:	● Grey				
Material:	Housing - Powder Coated Extruded Aluminium Diffuser - Extruded UV Stabilised & Frosted PMMA				
	Dimensions	Wattage (System)	CRI	Kelvin	Luminous Flux (Effective)
	605mm x 120mm x 82mm	12W	80+	4000K	4800Lm* (580lm Up And Down)

Dimensions:

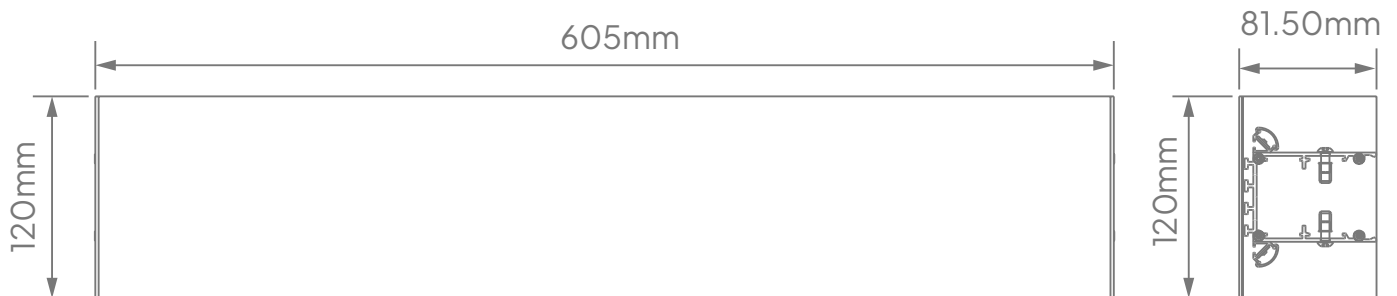

Wall Mount Bracket



*E & O.E (Errors And Omissions Excepted)

*Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.

*All lumen outputs stated above are based a nominal output that included a 10% light loss, this can vary depending on the optic used.

Contact

Cape Town

1B Hansen Close,
Richmond Park,
Cape Town
T. +27 21 555 0570

Durban

Unit L, Nandi Park,
34 Brickworks Way
Briardene
T. +27 31 001 2964

Namibia – Windhoek

Unit 2, Tesoro Building,
31 TV More Street
Windhoek
T. +264 61 40 0339

Johannesburg

17 Galaxy Road,
Unit 5A Galaxy Park,
Linbro Park
T. +27 11 262 5179

Port Elizabeth

216 Main Road,
Walmer
Port Elizabeth
T. +27 41 451 4359