



**RUBICON**  
LIGHTING

## TRON SMALL

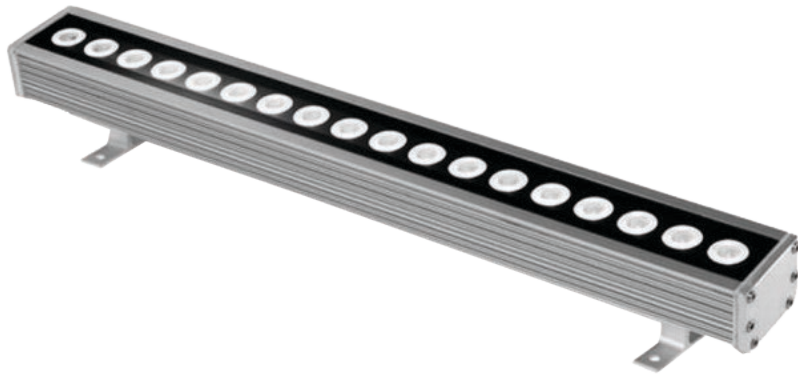

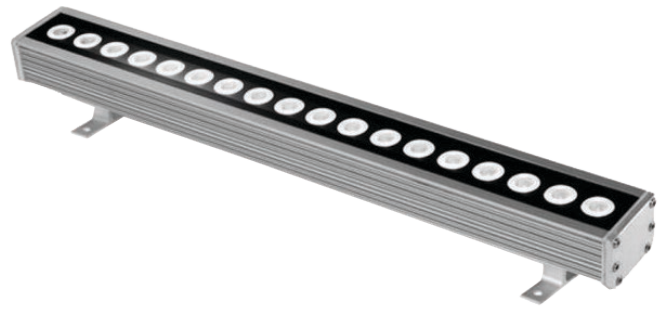

**Features:**


- Efficacy Of Up To 142lm/W\*
- Adjustable Tilt
- Dali Control Available (On Request)
- Minimum Lumen Maintenance: 50 000h (L70B30)

<b>Power Supply:</b>	24V DC				
<b>Colour Rendering Index:</b>	CRI 80+ _				
<b>Colour Consistency:</b>	3-Step MacAdam				
<b>Colour Temperature: (Kelvin / CCT)</b>	<span style="color: yellow;">●</span> 3000K <span style="color: red;">●</span> <span style="color: green;">●</span> <span style="color: blue;">●</span> RGB <span style="color: grey;">●</span> 4000K				
<b>Beam Angle:</b>	15° x 50°				
<b>Installation Type:</b>	Surface Mounted				
<b>Ingress Protection:</b>	IP65				
<b>IK Rating:</b>	IK05				
<b>Luminaire Colour:</b>	● Anodized Aluminium				
<b>Material:</b>	Body - Aluminium Alloy Diffuser - Transparent UVA Glass Diffuser				
	<b>Dimensions</b>	<b>Wattage (System)</b>	<b>CRI</b>	<b>Kelvin</b>	<b>Luminous Flux (Effective)</b>
	510mm x 60mm x 90.5mm	14W	80+	3000K	1750Lm*
	510mm x 60mm x 90.5mm	14W	80+	4000K	2000Lm*
	510mm x 60mm x 90.5mm	30W	-	RGB	1250Lm*

RGB Module:



**Dimensions:**

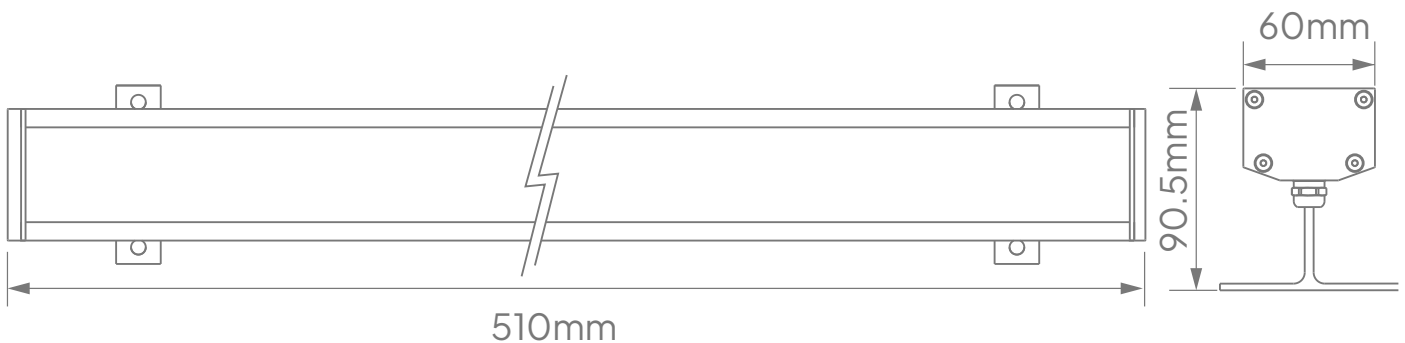

\*E & O.E (Errors And Omissions Excepted)

\*Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.

\*All lumen outputs stated above are based a nominal output that included a 10% light loss, this can vary depending on the optic used.

# Contact

## Cape Town

1B Hansen Close,  
Richmond Park,  
Cape Town  
T. +27 21 555 0570

## Durban

Unit L, Nandi Park,  
34 Brickworks Way  
Briardene  
T. +27 31 001 2964

## Namibia – Windhoek

Unit 2, Tesoro Building,  
31 TV More Street  
Windhoek  
T. +264 61 40 0339

## Johannesburg

17 Galaxy Road,  
Unit 5A Galaxy Park,  
Linbro Park  
T. +27 11 262 5179

## Port Elizabeth

216 Main Road,  
Walmer  
Port Elizabeth  
T. +27 41 451 4359