

**RUBICON**  
LIGHTING

**VELA SQUARE  
DUO**






**Features:**

- Efficacy Of Up To 170lm/W\*
- UGR: <19
- Adjustable Tilt
- Passive Cooling
- Emergency Backup Option Available (On Request)
- Minimum Lumen Maintenance: 50 000h (L80B10)



|                                                       |                                                                                        |                         |            |               |                                  |
|-------------------------------------------------------|----------------------------------------------------------------------------------------|-------------------------|------------|---------------|----------------------------------|
| <b>Power Supply:</b>                                  | 220-240V AC   50 - 60Hz                                                                |                         |            |               |                                  |
| <b>Operating Temperature Range:</b><br>(Ta - Ambient) | - 20°C to 35°C                                                                         |                         |            |               |                                  |
| <b>Dimming:</b>                                       | Dali_1-10V (On Request)                                                                |                         |            |               |                                  |
| <b>Colour Rendering Index:</b>                        | CRI 83+ _ CRI 92+ _ CRI 97+                                                            |                         |            |               |                                  |
| <b>Colour Consistency:</b>                            | 2-Step MacAdam                                                                         |                         |            |               |                                  |
| <b>Colour Temperature:</b><br>(Kelvin / CCT)          | <input type="radio"/> 2700K <input type="radio"/> 4000K<br><input type="radio"/> 3000K |                         |            |               |                                  |
| <b>Beam Angle:</b>                                    | 24° _ 38° _ 45°                                                                        |                         |            |               |                                  |
| <b>Installation Type:</b>                             | Recessed, Ceiling Mounted Luminaire                                                    |                         |            |               |                                  |
| <b>Ingress Protection:</b>                            | IP43                                                                                   |                         |            |               |                                  |
| <b>Luminaire Colour:</b>                              | <input type="radio"/> White <input checked="" type="radio"/> Black                     |                         |            |               |                                  |
| <b>Material:</b>                                      | Body - Powder Coated Aluminium                                                         |                         |            |               |                                  |
|                                                       | <b>Dimensions</b>                                                                      | <b>Wattage (System)</b> | <b>CRI</b> | <b>Kelvin</b> | <b>Luminous Flux (Effective)</b> |
|                                                       | 240mm x 124mm x 128mm (Cut-Out 230mm x 115mm)                                          | 2x 28W                  | 97+        | 2700K         | 2x 2165Lm*                       |
|                                                       | 240mm x 124mm x 128mm (Cut-Out 230mm x 115mm)                                          | 2x 28W                  | 97+        | 3000K         | 2x 2232Lm*                       |
|                                                       | 240mm x 124mm x 128mm (Cut-Out 230mm x 115mm)                                          | 2x 28W                  | 97+        | 4000K         | 2x 2343Lm*                       |

**Dimensions:**

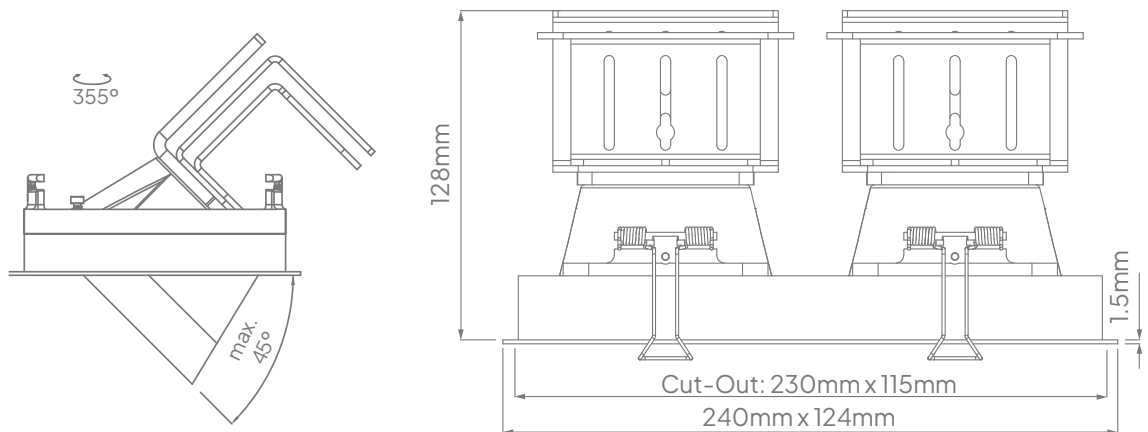

\*E & O.E (Errors And Omissions Excepted)

\*Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.

\*All lumen outputs stated above are based a nominal output that included a 10% light loss, this can vary depending on the optic used.

# Contact

## Cape Town

1B Hansen Close,  
Richmond Park,  
Cape Town  
T. +27 21 555 0570

## Durban

Unit L, Nandi Park,  
34 Brickworks Way  
Briardene  
T. +27 31 001 2964

## Namibia – Windhoek

Unit 2, Tesoro Building,  
31 TV More Street  
Windhoek  
T. +264 61 40 0339

## Johannesburg

17 Galaxy Road,  
Unit 5A Galaxy Park,  
Linbro Park  
T. +27 11 262 5179

## Port Elizabeth

216 Main Road,  
Walmer  
Port Elizabeth  
T. +27 41 451 4359