

RUBICON
LIGHTING

**VOYAGER
STYLE**





MOUNTING OPTIONS:



Features:

- Non-Maintained Operation
- Ultra-Slim Design
- Self-Contained
- Self-Testing
- Maximum Viewing Distance Of 23-30m
- Minimum Lumen Maintenance: 50 000h (L90B10)

Power Supply:	220-240V AC 50 - 60Hz					
Emergency Duration:	3 Hours 100% Output					
Battery:	Nickel Metal Hydride					
Colour Rendering Index:	CRI 80+					
Legend Height:	• 115mm (LH15) • 150mm (LH50)					
Colour Temperature: (Kelvin / CCT)	● 6500K					
Installation Type:	• Surface, Wall Or Ceiling • Suspended, Ceiling • Recessed					
Ingress Protection:	IP43					
IK Rating:	IK03					
Lens Options:	• Anti Panic (AP) • Escape Route (ER)					
	Dimensions	Lens	Wattage (System)	CRI	Kelvin	Luminous Flux (Effective)
	265mm x 134mm + Legend Height*	AP	4W	80+	6500K	192Lm*
	265mm x 134mm + Legend Height*	ER	4W	80+	6500K	163Lm*


Lens Options:

Anti Panic (AP)

Escape Route (ER)





Dimensions:

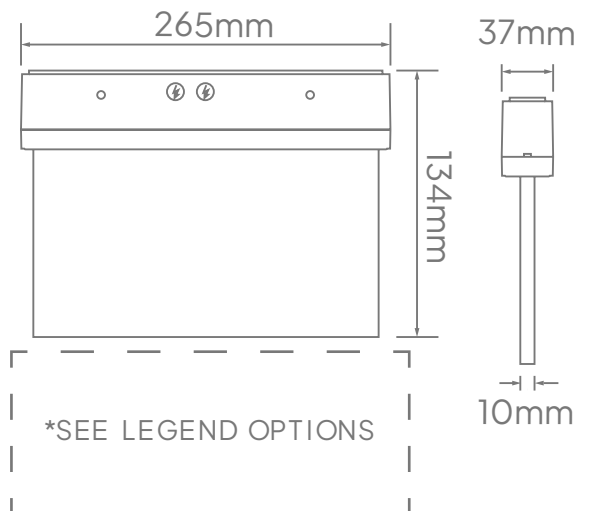

Legend Options:

LH50

LH15

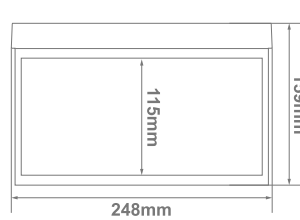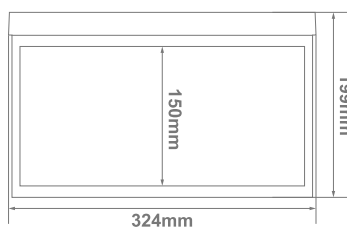

*E & O.E (Errors And Omissions Excepted)

*Due to the rapid development in LED technology the performance values, power consumption and lumen output levels stated above are subject to change without prior notice.

*All lumen outputs stated above are based a nominal output that included a 10% light loss, this can vary depending on the optic used.

Contact

Cape Town

1B Hansen Close,
Richmond Park,
Cape Town
T. +27 21 555 0570

Durban

Unit L, Nandi Park,
34 Brickworks Way
Briardene
T. +27 31 001 2964

Namibia – Windhoek

Unit 2, Tesoro Building,
31 TV More Street
Windhoek
T. +264 61 40 0339

Johannesburg

17 Galaxy Road,
Unit 5A Galaxy Park,
Linbro Park
T. +27 11 262 5179

Port Elizabeth

216 Main Road,
Walmer
Port Elizabeth
T. +27 41 451 4359