

PROSenM01 (on/off)



FEATURES:


- Microwave sensor
- 360° Detection angle
- 7m Detection area
- Recessed mounted
- 55° Sensor head adjustment
- Adjustable sensitivity
- Lux level sensing




Ordering example: Product Name (e.g. PROSenM01)

Supply Voltage	Frequency	Brightness Measurement Range	Output	Time Delay Range	Frame Colour
220V - 240V	50Hz	5/1000 Lux	1000W - Incandescent 500W - AC Halogen 200W - Fluorescent 150W - LED	30s - 30min	White


DETAIL:



DETECTION AREA:

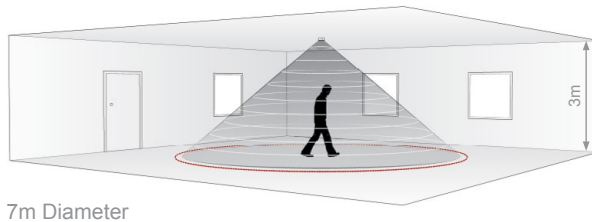

DIMENSIONS:

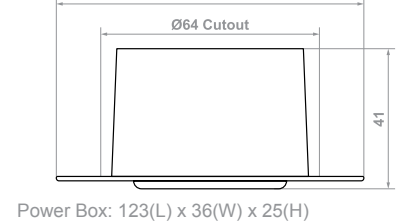

PROSenM02 (on/off)



FEATURES:


- Microwave sensor
- 360° Detection angle
- 8m Detection area
- Recessed mounted
- Adjustable sensitivity
- Lux level sensing




Ordering example: Product Name (e.g. PROSenM02)

Supply Voltage	Frequency	Brightness Measurement Range	Output	Time Delay Range	Frame Colour
220V - 240V	50Hz	1/2000 Lux	1000W - Incandescent 500W - AC Halogen 200W - Fluorescent 150W - LED	5s - 30min	White


DETAIL:



DETECTION AREA:

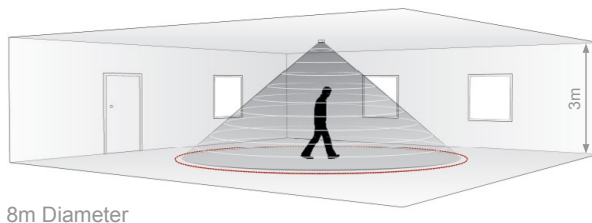

DIMENSIONS:

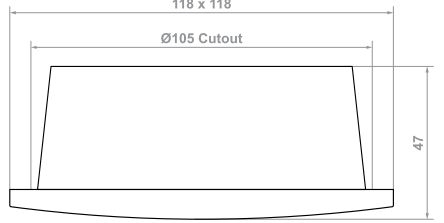

[Return to Contents Page](#)