

PROSenP03 (on/off)



FEATURES:

- Passive infrared sensor
- 360° Detection angle
- 9m Detection area
- Optional IR remote
- IP20 Recessed (R) optional mounting
- IP54 Surface (S) optional mounting
- Adjustable sensitivity
- Lux level sensing

Ordering example: Product Name (e.g. PROSenP03)




Optional IR remote

Supply Voltage	Frequency	Brightness Measurement Range	Output	Time Delay Range	Frame Colour
220V - 240V	50Hz	10/2000 Lux	2200W - Incandescent 2200W - AC Halogen 1200VA - Fluorescent 600W - LED	30s - 30min	White


MOUNTING OPTIONS:



DETECTION AREA:

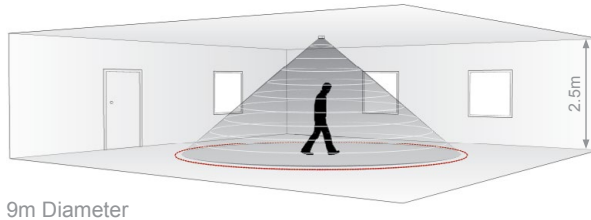

DIMENSIONS:

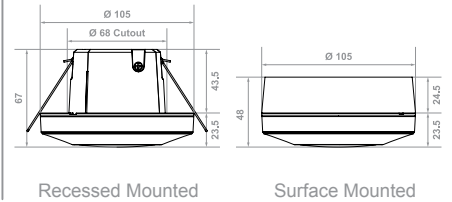

PROSenP04 (on/off)



FEATURES:

- Passive infrared sensor
- 360° Detection angle
- 25m Detection area
- Optional IR remote
- IP20 Recessed (R) optional mounting
- IP54 Surface (S) optional mounting
- Adjustable sensitivity
- Lux level sensing

Ordering example: Product Name (e.g. PROSenP04)




Optional IR remote

Supply Voltage	Frequency	Brightness Measurement Range	Output	Time Delay Range	Frame Colour
220V - 240V	50Hz	10/2000 Lux	2200W - Incandescent 2200W - AC Halogen 1200VA - Fluorescent 600W - LE	30s - 30min	White


MOUNTING OPTIONS:



DETECTION AREA:

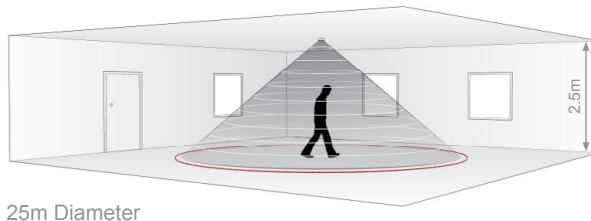

DIMENSIONS:

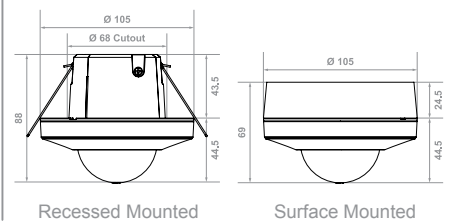

[Return to Contents Page](#)