

PROSenP05 (on/off)

IP20 rating



FEATURES:

- Passive infrared sensor
- 360° Detection angle
- 9m Detection area
- Optional IR remote
- Recessed mounted
- Dual output
- Adjustable sensitivity
- Lux level sensing



Optional IR remote


Ordering example: Product Name (e.g. PROSenP05)

Supply Voltage	Frequency	Brightness Measurement Range	Output 1	Output 2 Dry Contact	Time Delay Range	Frame Colour
220V - 240V	50Hz	10/2000 Lux	2000W - Incandescent 1000W - AC Halogen 750VA - Fluorescent 600VA - LED	5A for 12-250 VAC or 5A for 5-30 VDC	Time 1: 30s - 30min Time 2: 10s - 60min	White


DETAIL:



DETECTION AREA:

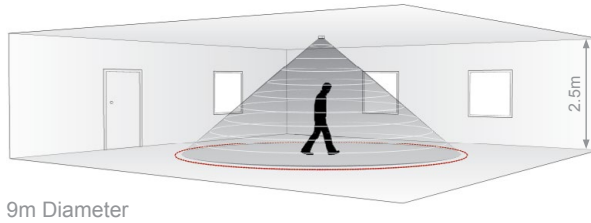

DIMENSIONS:



PROSenP06 (on/off) - Cold Room Sensor

IP55 rating



FEATURES:

- Passive infrared sensor
- Temperature range: -30°C to 35°C
- 360° Detection angle
- 7m Detection area
- 10A of lighting and/or ventilation
- Recessed (R) & surface (S) mounting options

Ordering example: Product Name/Mounting (e.g. PROSenP06/R)




Supply Voltage	Frequency	Brightness Measurement Range	Output	Time Delay Range	Frame Colour
230VAC	50Hz	0/1000 Lux	10A	10s - 99min	White

DETAIL:




With extended wiring housing

DETECTION AREA:

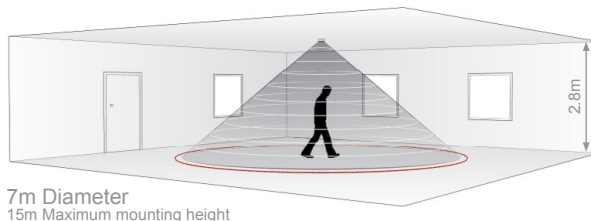

DIMENSIONS:



[Return to Contents Page](#)