



PROSenP09 - Hibay



FEATURES:

- Passive infrared sensor
- 360° Detection angle with 45° aperture
- 36m Detection area
- Ideal for high ceilings
- 1416 Switching zones
- UV-resistant housing
- Surface mounted

Ordering example: Product Name (e.g. PROSenP09)




| Supply Voltage | Frequency | Brightness Measurement Range | Output | Time Delay Range | Frame Colour |
|----------------|-------------|------------------------------|----------------------|------------------|--------------|
| 220V - 240V | 50Hz / 60Hz | 1/1000 Lux | 2000W - Incandescent | 5s - 15min | White |

OPTIONS:




Remote control

DETECTION AREA:



DIMENSIONS:




PROSenP10



FEATURES:


- Passive infrared sensor
- 6mm Height
- 360° Detection angle
- 4m Detection area
- Recessed mounted
- Round (Rnd) or Square (Sq) frame

Ordering example: Product Name/Frame (e.g. PROSenP10/Rnd)

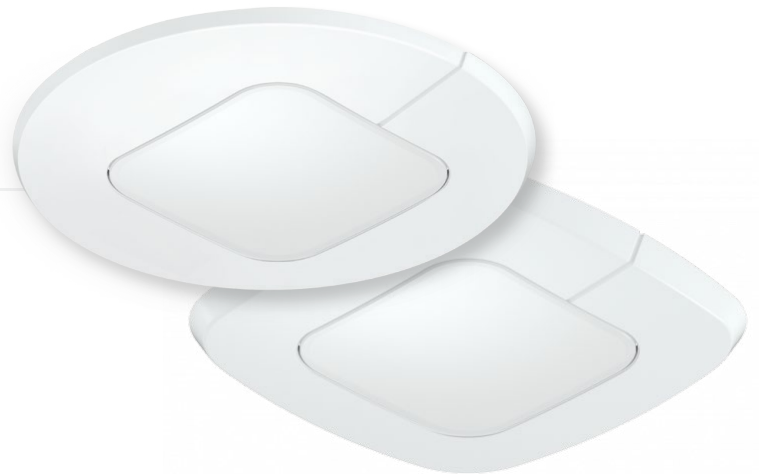


| Supply Voltage | Frequency | Brightness Measurement Range | Output | Time Delay Range | Frame Colour |
|----------------|-------------|------------------------------|----------------------|------------------|--------------|
| 220V - 240V | 50Hz / 60Hz | 10/1000 Lux | 1000W - Incandescent | 30s - 30min | White |


DETAIL:



DETECTION AREA:

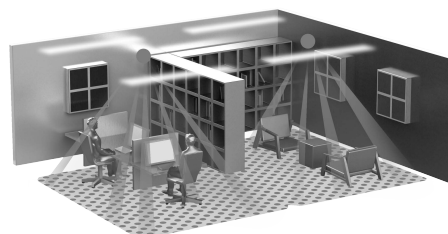

DIMENSIONS:

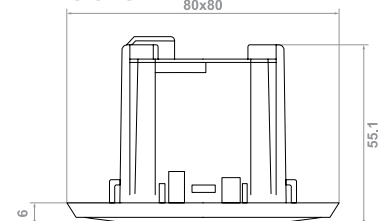

[Return to Contents Page](#)