



## PROSenP11 - Isle Sensor




**FEATURES:**

- Passive infrared sensor
- 360° Detection angle with 9° aperture
- 120m<sup>2</sup> Detection area
- 280 Switching zones
- Surface mounted


Ordering example: Product Name (e.g. PROSenP11)

Supply Voltage	Frequency	Brightness Measurement Range	Output	Time Delay Range	Frame Colour
220V - 240V	50Hz / 60Hz	2/1000 Lux	2000W - Incandescent	5s - 15min	White


**DETAIL:**



**DETECTION AREA:**



**DIMENSIONS:**



## PROSenP12 - Wall Mounted




**FEATURES:**

- Passive infrared sensor
- 300° Detection angle with 180° aperture
- 24m Detection area
- Ideal for corner situations
- Wall mounted


Ordering example: Product Name (e.g. PROSenP12)

Supply Voltage	Frequency	Brightness Measurement Range	Output	Time Delay Range	Frame Colour
230V - 240V	50Hz / 60Hz	2/2000 Lux	2000W - Incandescent	10s - 15min	White


**DETAIL:**



**DETECTION AREA:**

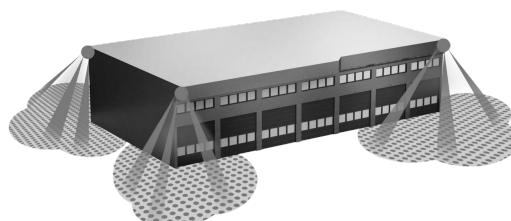

**DIMENSIONS:**

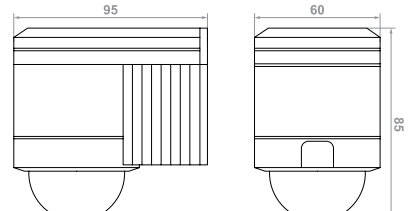

[Return to Contents Page](#)