



PROSenP13 - Wall Mounted



FEATURES:


- Passive infrared sensor
- 300° Detection angle
- 35m Detection area
- 1360 Switching zones
- Wall mounted

Ordering example: Product Name (e.g. PROSenP13)




Supply Voltage	Frequency	Brightness Measurement Range	Output	Time Delay Range	Frame Colour
230V - 240V	50Hz / 60Hz	2/2000 Lux	2000W - Incandescent	10s - 15min	White/Black


DETAIL:



DETECTION AREA:



DIMENSIONS:

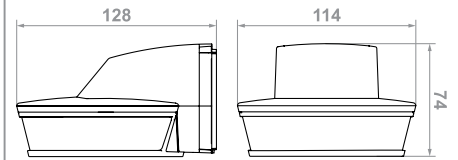

PROSenP14 - Wall Mounted



FEATURES:


- Passive infrared sensor
- 300° Detection angle
- 30m Detection area
- 1360 Switching zones
- Wall mounted

Ordering example: Product Name (e.g. PROSenP14)




Supply Voltage	Frequency	Brightness Measurement Range	Output	Time Delay Range	Frame Colour
230V - 240V	50Hz / 60Hz	2/2000 Lux	2000W - Incandescent	10s - 15min	White


DETAIL:



DETECTION AREA:

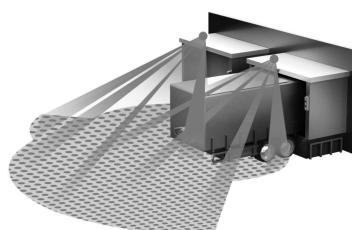

DIMENSIONS:

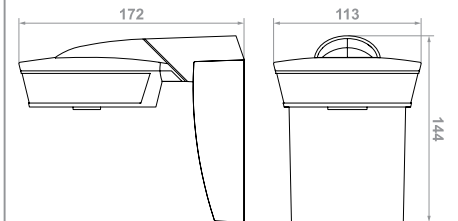

[Return to Contents Page](#)