


# PTB7680LS4X

## PHOTOBIO•MX LED, 680W, 100–277V


### S4 SPECTRUM

PHOTOBIO•MX high efficiency LED is designed for horticultural professionals looking to increase performance and yields while maximizing ROI. Robust commercial design utilizes ultra-wide bars to deliver high light levels while allowing air circulation. The high efficiency S4 spectrum provides more red, far-red, and blue wavelengths to deliver vigorous growth and optimize flower development. Multilayer usage can be utilized to maximize canopy square footage within existing structure footprint.

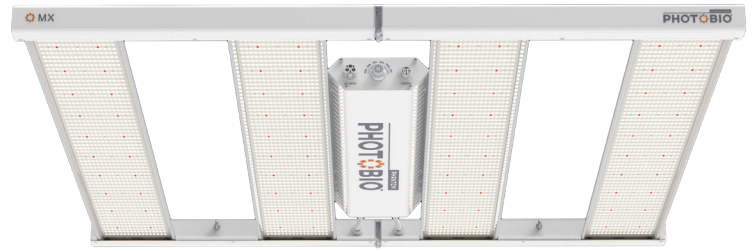

### System Overview

Model	PTB7680LS4
Fixture Type	Horticultural LED
Spectrum	S4 Spectrum
Typical Photon Flux Output	1768 μmol/s
Input Power	680W
Efficacy	2.6 μmol/joule
Input Voltage Range	100–277V
Lifetime	> 50,000hr
Optics	120° Primary Optics
Dimmable	0–10V
Driver	IP67 Driver
Operating Environment	Wet Location
Ingress Protection Rating	IP65
Warranty Period	5 Years
Manual output adjustment	iLOC Integrated Light Output Control



### iLOC Manual Output Adjustment Settings

Voltage		40%	55%	70%	85%	100%
110V	Power (W)	271.6	376.6	472.5	580	685
	Amperage (A)	2.451	3.44	4.316	5.29	6.19
120V	Power (W)	271	375	470	576	681
	Amperage (A)	3.137	3.93	4.82	5.67	2.254
208V	Power (W)	270	371	464	565	665
	Amperage (A)	1.33	1.82	2.25	2.76	3.22
230V	Power (W)	270	371	463	565	665
	Amperage (A)	1.21	1.64	2.04	2.48	2.92
240V	Power (W)	270	371	463	564	664
	Amperage (A)	1.16	1.58	1.96	2.38	2.81
277V	Power (W)	271	371	462	563	662
	Amperage (A)	1.05	1.398	1.718	2.09	2.45

### Driver Electrical Specifications


Model	Phantom 680 PSU	Power Factor	0.95
Fixture Power	680W	Frequency	50/60Hz
Input Voltage Range	100–277V	THD	<20%
Max Voltage Range	90–305V	ta	-40
Max Input Power	690W	tc	90

### Driver Input Amperage Reference

Voltage Input	120V	208V	240V	277V
Typical Amperage	5.67	3.3	2.81	2.45
Max Amperage	5.8	3.4	2.9	2.5


### S4 Spectrum

Normalized Photon Output

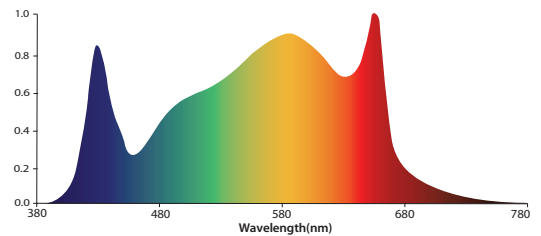

**S4 Spectrum:** Provides highly efficient full spectrum with a healthy red-to-blue ratio to drive photosynthesis. Light energy between 500–599nm, previously thought wasted, penetrates deeper into the plant canopy promoting photomorphogenic responses. High color rendering “white” light aids to rapidly identify potential threats to your crop and provides superior working conditions and safety for personnel. Ideal for both flowering and vegetative production.



### Photosynthetic Photon Intensity Distribution

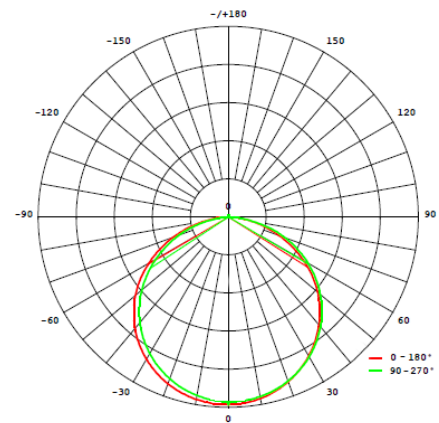


# PTB7680LS4X

PHOTOBIO•MX LED, 680W, 100–277V

## S4 SPECTRUM

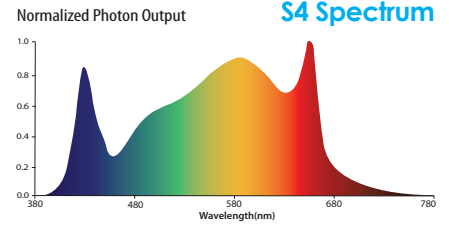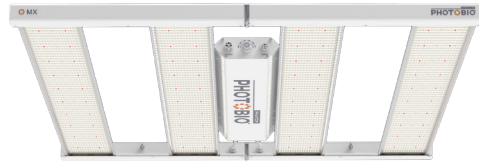

### Dimming Ratio

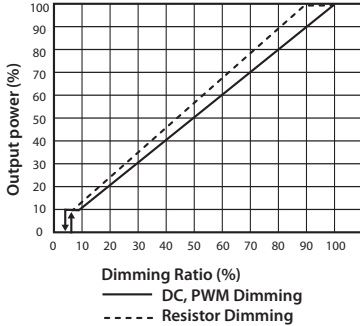

### Power Harnesses Options

Specific cable harness sold separately based on facility requirements.

Item Code	Image	Type	Description
CHE1063000W		w/leads	10' F 16AWG WT w/leads, Harness
CHE1063010W		110–120V	10' F 16AWG WT 110–120V Plug, 5-15P, Harness
CHE1063015W		208–240V	10' F 16AWG WT 208–240V Plug, 5-15P, Harness
CHE1083020W		277V	10' F 18AWG WT 277V, L7-15P, Harness

### Operating Conditions

Rated Operating Temperature	77°F/25°C
Minimum Operating Temperature	4°F/-20°C
Maximum Operating Temperature	104°F/40°C
Operating Environment	Wet Location
Ingress Protection Rating	IP65
Material	N/A

### Optical Specifications

Optics	120 degrees
Total Diode Quantity	4160
Diode Brand	Lumiled
Spectrum	S4
Lifetime	> 50,000hr

### Driver Specifications

Microprocessor Control	Yes
Open Circuit Protection	Yes
Short Circuit Protection	Yes
Overtemperature Protection	Yes
Over/Undervoltage Protection	Yes
Over/Undervoltage Indicator	Yes
Output Compensation	Yes
IP Rated 0–10V	Yes
Internal EMI Suppression	Yes
AC Input	Yes

### Safety Certifications

UL	N/A
ETL	Yes
CE	Yes
FCC Commercial	Yes
FCC Residential	Yes




### PHOTOBIO•MX Optional Accessories

PTBCC8850W	PHOTO LOC 0-10V Control Cable 8' Trunk + 5' Branch
PTBRDMX16W	PHOTOBIO MX 16' Remote Driver Mounting Kit
PTBCCJ16W	PHOTO LOC 0-10V Control Cable 16' Jumper

### Mechanical Specification

Dimensions (L x W x H)	1120 x 1100 x 56 mm / 44.09" x 43.31" x 2.2"
Net Weight	21.54 kg / 47.5 Lb
Thermal Management	Passive
Material	Aluminum, Stainless Steel

### Dimensional Drawing

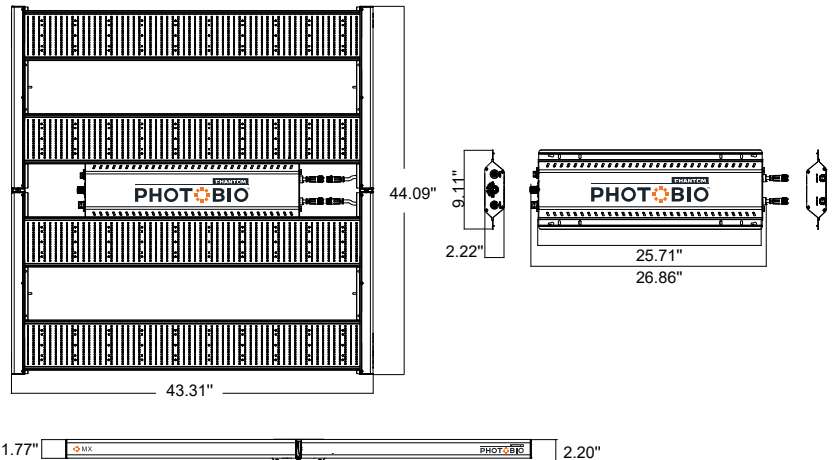

### WARNING – POSSIBLE RISK OF INJURY TO EYES AND SKIN

Hazardous optical UV, HEV, and IR radiation may be emitted from the light source. Always wear personal protective equipment ensuring complete shielding of skin and eyes. Avoid prolonged exposure and looking directly at light source.



2249 S. McDowell Ext. Petaluma, CA, USA | 800.634.9990 | [PhantomBio.com](http://PhantomBio.com)