



**HYPERMOL**

LED Lighting Solution

**VOLTAGE:** 100-277V

**WATTS:** 720W


**SKU:** IL-HMOL-720

**TECHNICAL SPECS**

|                            |                        |
|----------------------------|------------------------|
| Rated Voltage              | 120-277V AC            |
| Voltage Range (+/-10%)     | 100-277V               |
| PPF                        | 1944 $\mu\text{mol/s}$ |
| Efficacy                   | 2.7 $\mu\text{mol/J}$  |
| Min Power Factor           | >90%                   |
| THD                        | < 20%                  |
| Dimmable                   | 0-10V Controllable     |
| Ambient Temperature        | 0 - 35°C / 32-95°F     |
| Minimum Mounting Height    | 6" to top of Canopy    |
| BTU                        | 2,462                  |
| Light Distribution         | 120°                   |
| LED Lifespan (90% of Life) | 50,000+ hours          |




**720W LED SPECTRUM**

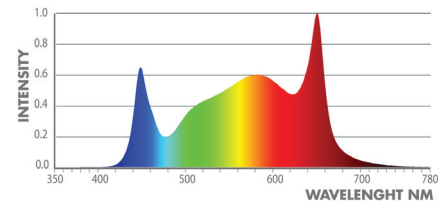

**PRODUCT SIZE**


**PHYSICAL SPECIFICATIONS**

|        |         |         |
|--------|---------|---------|
| Length | 1065 mm | 41.9"   |
| Width  | 1105 mm | 43.5"   |
| Height | 58 mm   | 2.3"    |
| Weight | 20.8kg  | 50.3lbs |

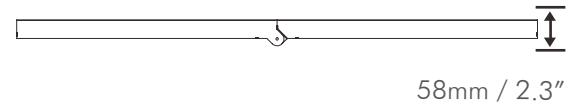

**VOLTAGE AND AMPERAGE**

|      |       |
|------|-------|
| 120V | 6.00A |
| 208V | 3.46A |
| 220V | 3.27A |
| 240V | 3.00A |
| 277V | 2.60A |

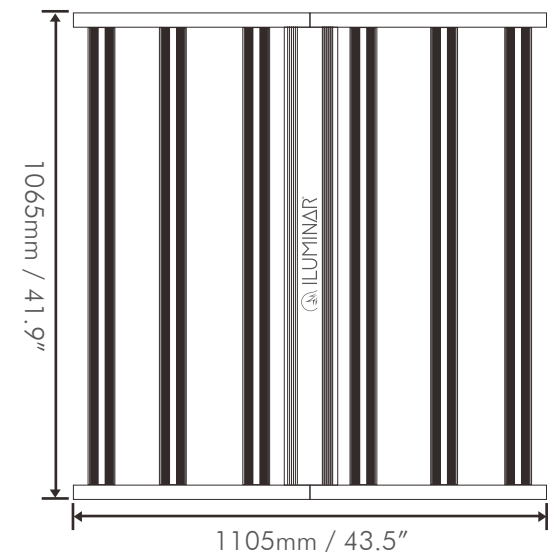

iluminarlighting.com  
Toll Free: 1-877-540-5588

**5 YEAR WARRANTY**

© Copyright 2023 ILUMINAR Lighting  
Subject to change without notice.