

LMA-G is specially designed to be used with ThinkGrow single-bar fixtures, i.e. Model-I and I Plus. The LMA-G needs to be connected with a lighting control adaptor to offer a group control function to the grow lights. Each LMA-G can control one group of lights./ Each light group requires one LMA-G. It needs to be connected inline with the LMA-T lighting control adapter to activate the group control function. Up to 10 groups of lights can be created, each with individual settings.



Specifications

LMA-G

Input

Voltage 12V

Current

Maximum Current

0.1A

Working Environment

Temperature	32°-122°F	
Humidity	≤90%	
Humidity	≤90%	


Packaging Dimensions

Size 156

156mm(L) x 83mm(W) x 30mm(H)

RoHS



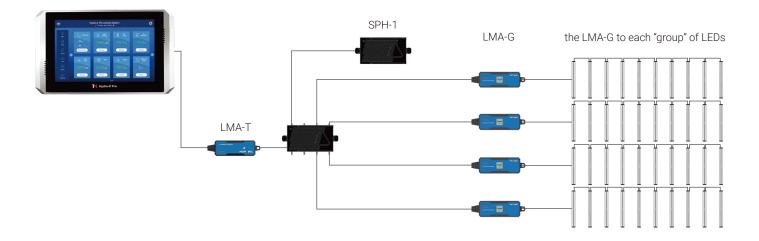

TrolMaster

Email: support@trolmaster.com Phone: 877-420-9876