






















Introducing the Grower's Choice ROI-E900, the new LED series, Heavyweight. This XL 8 bar powerhouse commercial fixture boosts up to 1,000 watts of supercharged photon output, earning its nickname "Fat Boy". Using Growers Choice's proven PAR formula, the ROI-E900 radiates across 4'x5' grow spaces utilizing our unique PAR formula and 3k-full phase spectrum producing tremendous light output and canopy coverage. Designed to accommodate commercial cultivations with wider tables or trays, the ROI-E900 provides the highest potential for extended coverage, penetration, and quality yields. The ROI-E900 will give you MORE POWER & MORE FLOWER, hands down!



High Performance:





Energy Saving and Easy HVAC:





Up to 40% energy saving

40% less HVAC requirement

Total Control:

The ROI-F900 is controllable with Grower's Choice Master Controllers and is compatible with all quality master controllers. Cultivators can set the fixture to turn off and on at desired times, program sunrise/sunset settings, program dimming options and set protective fail safes to dim or turn off fixtures in the event of excessive room temperatures, such as in the event of HVAC failure, potential saving gardens from heat damage.




Compatible with Grower's Choice Master Controller



SPECIFICATIONS				
Model	ROI-E900			
Item				
Light Source	LED			
Spectrum	GC-3KF Full Phase			
PPF (umol/J)	2340-2600 umol/s			
Imput Power	1050W + EXT Control Boost			
PPE (umol/s)	2.6 umol/J			
Color Render Index/weight	≥86			
Fixture Dimension	4/ 0"L F0 F"N/ 2 2"LL/ 110 1 1F1 2 0 1			
(L*W*H)	46.9"L x 59.5"W x 3.2"H / 119.1cm x 151.2cm x 8.1cm			
Fixture Weight	55lbs / 25kg			
Mounting Height	≥6" (15.2cm) Above Canopy			
Thermal Management	Passive			
Power Driver	Isolated Driver			
Driver Efficiency	≥90% (220 Vac Input)			
Dimming	0-10V & Step Dimming			
Dimming Range	10%~100%			
Light Distribution	120°			
Maximum Ambient Temperature	104°F / 40°C			
Power Factor	>90%			
Certifications	UL8800, UL1598, IP65			
Lifetime	L90>54,000 hrs			
Warranty	5 Years Standard Warranty			

AMPERAGE BY VOLTAGE SERVICE @ 900W

VOLTAGE	120V	208V	240V	277V
AMPERAGE	8.9A	5A	4.5A	3.8A

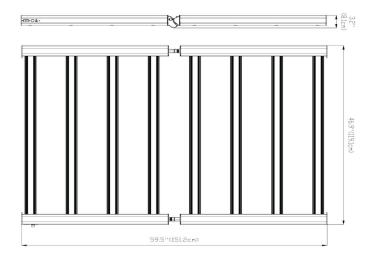

- * PPF calculations ccomplied using our in-house integrating sphere measurements and typical spectroadiometric data for each LED to determine the fixture performance. Actual photometric results may vary within the LED's manufacturer's bin tolerance.
- * Wattage values are typical expected values. TSL Horti Tech maintains and tolerance of +/-10% range on flux and power consumption. Target light level can vary from projected levels depending on ambient temperature, room reflections values, and other conditions.



