
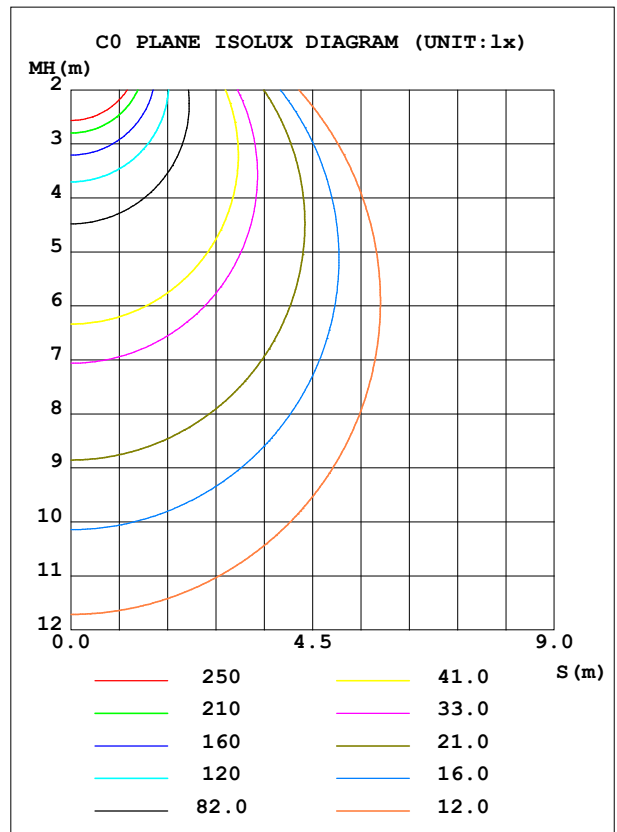


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.11V I:0.3534A P:42.153W PF:0.9930 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4836.5x1 lm		
NAME: PL1X4-40W-A5C5-P	TYPE: 40W	WEIGHT:
SPEC.: 6000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.55*0.55	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	PL1X4-40W-A5C5-P	Imax (cd)	1646	S/MH (C0/180)	1.27
NOMINAL POWER (W)	40	LOR (%)	100.0	S/MH (C90/270)	1.28
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	4836.5	<input type="checkbox"/> UP, DN (C0-180)	0.0,49.8
NOMINAL FLUX (lm)	4836.5	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0,50.2
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	1.35

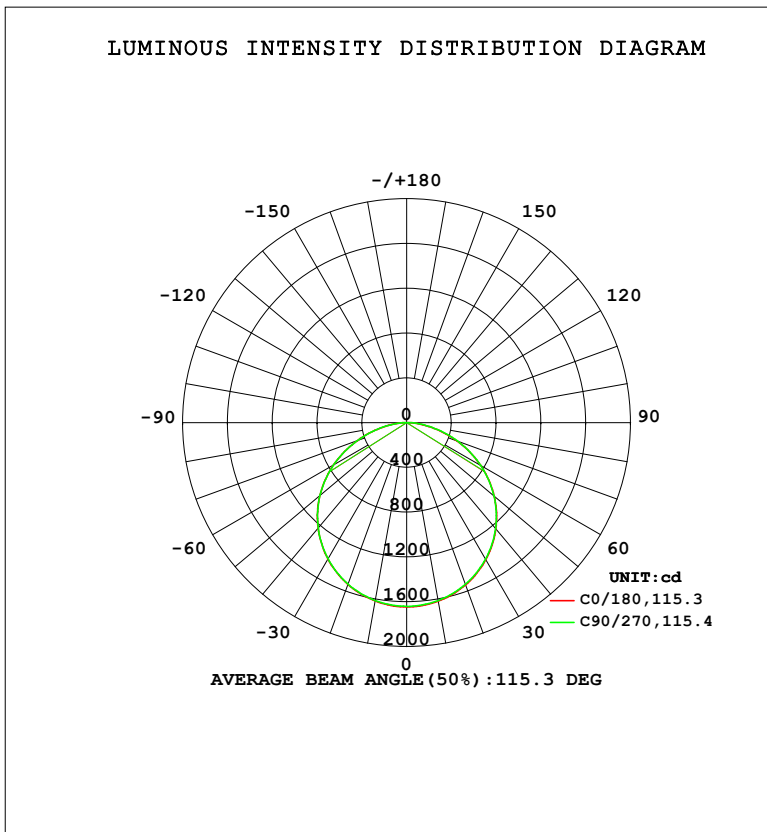

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2022-11-17

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	1618	1614	1613	1612	1621	1617	1614	1611	0- 10	155.4	155.4	3.21,3.21
20	1537	1534	1535	1534	1542	1539	1536	1533	10- 20	446.5	601.9	12.4,12.4
30	1407	1405	1405	1406	1415	1412	1409	1405	20- 30	681.2	1283	26.5,26.5
40	1231	1229	1230	1231	1240	1238	1236	1231	30- 40	829.3	2112	43.7,43.7
50	1012	1010	1011	1013	1021	1021	1019	1015	40- 50	870.7	2983	61.7,61.7
60	753.9	751.9	752.3	756.2	764.3	766.7	764.8	761.1	50- 60	795.8	3779	78.1,78.1
70	468.0	466.1	468.8	470.6	478.7	482.8	484.4	478.4	60- 70	611.6	4390	90.8,90.8
80	188.9	188.8	194.2	192.5	197.7	203.9	209.6	201.2	70- 80	351.1	4742	98,98
90	4.123	3.166	3.933	5.887	6.483	6.896	8.500	8.820	80- 90	94.91	4836	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2549.8 lm

%lum = 52.7%

%lamp = 52.7%

Conical surface Flux(130deg): 4113.7 lm

%lum = 85.1%


%lamp = 85.1%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2022-11-17

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.11V I:0.3534A P:42.153W PF:0.9930 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4836.5x1 lm		
NAME: PL1X4-40W-A5C5-P	TYPE: 40W	WEIGHT:
SPEC.: 6000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.55*0.55	Shielding Angle:

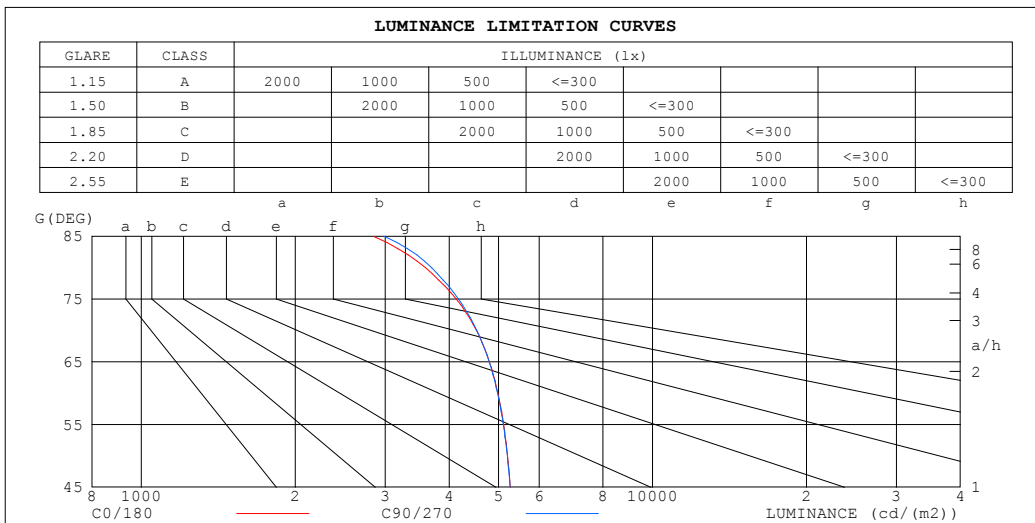

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2842	2988
80	3596	3698
75	4128	4170
70	4523	4532
65	4795	4791
60	4984	4974
55	5113	5104
50	5207	5199
45	5268	5263


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2022-11-17

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.11V I:0.3534A P:42.153W PF:0.9930 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4836.5x1 lm		
NAME: PL1X4-40W-A5C5-P	TYPE: 40W	WEIGHT:
SPEC.: 6000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.55*0.55	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.91	.88	.90	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.85	.79	.75	.81	.77	.73	.78	.75	.71	.69
3.0	.79	.71	.64	.77	.70	.63	.74	.68	.62	.72	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.64	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.46	.40	.52	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.41	.35	.47	.40	.35	.46	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.28	.42	.34	.28	.41	.33	.28	.40	.33	.28	.39	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.30	.26	.37	.30	.25	.36	.30	.25	.24

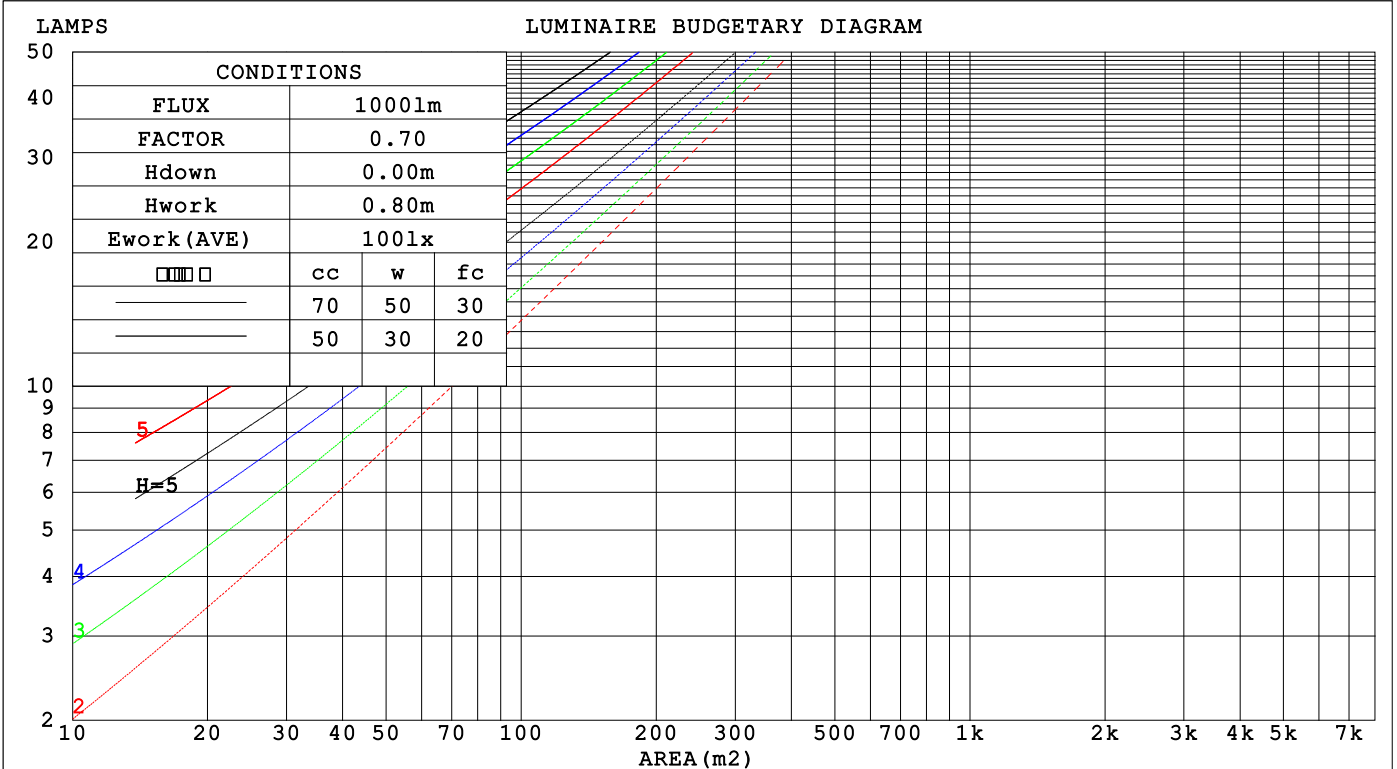

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2022-11-17

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.11V I:0.3534A P:42.153W PF:0.9930 Freq:60.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4836.5x1 lm		
NAME: PL1X4-40W-A5C5-P	TYPE: 40W	WEIGHT:
SPEC.: 6000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.55*0.55	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients(WEC)			
0.0						
1.0	.313 .178 .056	.306 .175 .055	.293 .168 .054	.281 .162 .052	.270 .156 .050	
2.0	.295 .162 .050	.288 .159 .049	.277 .154 .048	.266 .149 .047	.256 .145 .046	
3.0	.273 .145 .043	.267 .143 .043	.257 .139 .042	.247 .135 .042	.238 .132 .041	
4.0	.251 .131 .038	.246 .129 .038	.237 .126 .038	.229 .123 .037	.221 .120 .037	
5.0	.232 .118 .034	.228 .117 .034	.220 .114 .034	.212 .112 .033	.205 .110 .033	
6.0	.215 .108 .031	.211 .107 .031	.204 .105 .030	.197 .102 .030	.191 .100 .030	
7.0	.200 .099 .028	.197 .098 .028	.190 .096 .028	.184 .094 .027	.178 .093 .027	
8.0	.187 .091 .026	.184 .090 .026	.178 .089 .025	.172 .087 .025	.167 .086 .025	
9.0	.175 .085 .024	.172 .084 .024	.167 .083 .023	.162 .081 .023	.157 .080 .023	
10.0	.164 .079 .022	.162 .078 .022	.157 .077 .022	.153 .076 .022	.149 .075 .021	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients(CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.181 .156 .134	.154 .134 .115	.106 .092 .080	.061 .053 .046	.019 .017 .015	
2.0	.173 .132 .098	.148 .114 .084	.101 .079 .059	.058 .046 .035	.019 .015 .011	
3.0	.165 .114 .074	.141 .099 .064	.097 .069 .045	.056 .040 .027	.018 .013 .009	
4.0	.157 .101 .058	.135 .087 .050	.093 .061 .035	.054 .036 .021	.017 .012 .007	
5.0	.150 .091 .047	.129 .078 .041	.089 .055 .029	.051 .032 .017	.017 .010 .006	
6.0	.143 .082 .039	.123 .071 .034	.085 .050 .024	.049 .029 .014	.016 .010 .005	
7.0	.136 .075 .033	.117 .065 .029	.081 .046 .020	.047 .027 .012	.015 .009 .004	
8.0	.129 .070 .029	.111 .060 .025	.077 .042 .018	.045 .025 .011	.015 .008 .003	
9.0	.123 .065 .025	.106 .056 .022	.074 .039 .016	.043 .023 .009	.014 .008 .003	
10.0	.118 .060 .022	.101 .052 .019	.070 .037 .014	.041 .022 .008	.013 .007 .003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2022-11-17

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.11V I:0.3534A P:42.153W PF:0.9930 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4836.5x1 lm		
NAME: PL1X4-40W-A5C5-P	TYPE: 40W	WEIGHT:
SPEC.: 6000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.55*0.55	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.6	20.1	18.8	20.3	20.5	18.6	20.1	18.8	20.3	20.5
3H	20.1	21.5	20.4	21.8	22.0	20.1	21.5	20.4	21.8	22.0
4H	20.7	22.0	21.0	22.3	22.5	20.7	22.0	21.0	22.3	22.6
6H	21.1	22.4	21.4	22.6	22.9	21.1	22.4	21.4	22.7	22.9
8H	21.2	22.4	21.5	22.7	23.0	21.2	22.5	21.6	22.8	23.0
12H	21.3	22.4	21.6	22.7	23.0	21.3	22.5	21.7	22.8	23.1
4H 2H	19.2	20.5	19.5	20.8	21.0	19.2	20.5	19.5	20.8	21.0
3H	20.9	22.1	21.2	22.4	22.7	20.9	22.1	21.2	22.4	22.7
4H	21.6	22.7	22.0	23.0	23.3	21.6	22.7	22.0	23.0	23.4
6H	22.1	23.1	22.5	23.4	23.8	22.2	23.1	22.6	23.5	23.8
8H	22.3	23.2	22.7	23.5	23.9	22.3	23.2	22.7	23.6	24.0
12H	22.4	23.2	22.8	23.6	24.0	22.4	23.3	22.9	23.6	24.1
8H 4H	21.9	22.8	22.3	23.1	23.5	21.9	22.8	22.3	23.1	23.5
6H	22.5	23.3	23.0	23.7	24.1	22.6	23.3	23.0	23.7	24.1
8H	22.8	23.4	23.2	23.8	24.3	22.8	23.5	23.3	23.9	24.3
12H	22.9	23.5	23.4	23.9	24.4	23.0	23.6	23.5	24.0	24.5
12H 4H	21.9	22.7	22.3	23.1	23.5	21.9	22.7	22.3	23.1	23.5
6H	22.6	23.2	23.0	23.7	24.1	22.6	23.3	23.1	23.7	24.1
8H	22.8	23.4	23.3	23.9	24.3	22.9	23.5	23.4	23.9	24.4

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.2 / - 0.2	+ 0.1 / - 0.2
1.5H	+ 0.2 / - 0.3	+ 0.2 / - 0.3
2.0H	+ 0.2 / - 0.3	+ 0.2 / - 0.3

CIE Pub.117, 4836 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 5.5)
 Area: 0.3025 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2022-11-17

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.11V I:0.3534A P:42.153W PF:0.9930 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4836.5x1 lm		
NAME: PL1X4-40W-A5C5-P	TYPE: 40W	WEIGHT:
SPEC.: 6000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.55*0.55	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	64	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	79	93	85	79	89	83	77	69
2.50	99	91	85	97	89	84	93	87	82	73
3.00	102	95	89	100	93	88	96	91	86	78
4.00	106	100	96	104	99	94	99	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2022-11-17

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.11V I:0.3534A P:42.153W PF:0.9930 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4836.5x1 lm		
NAME: PL1X4-40W-A5C5-P	TYPE: 40W	WEIGHT:
SPEC.: 6000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.55*0.55	Shielding Angle:

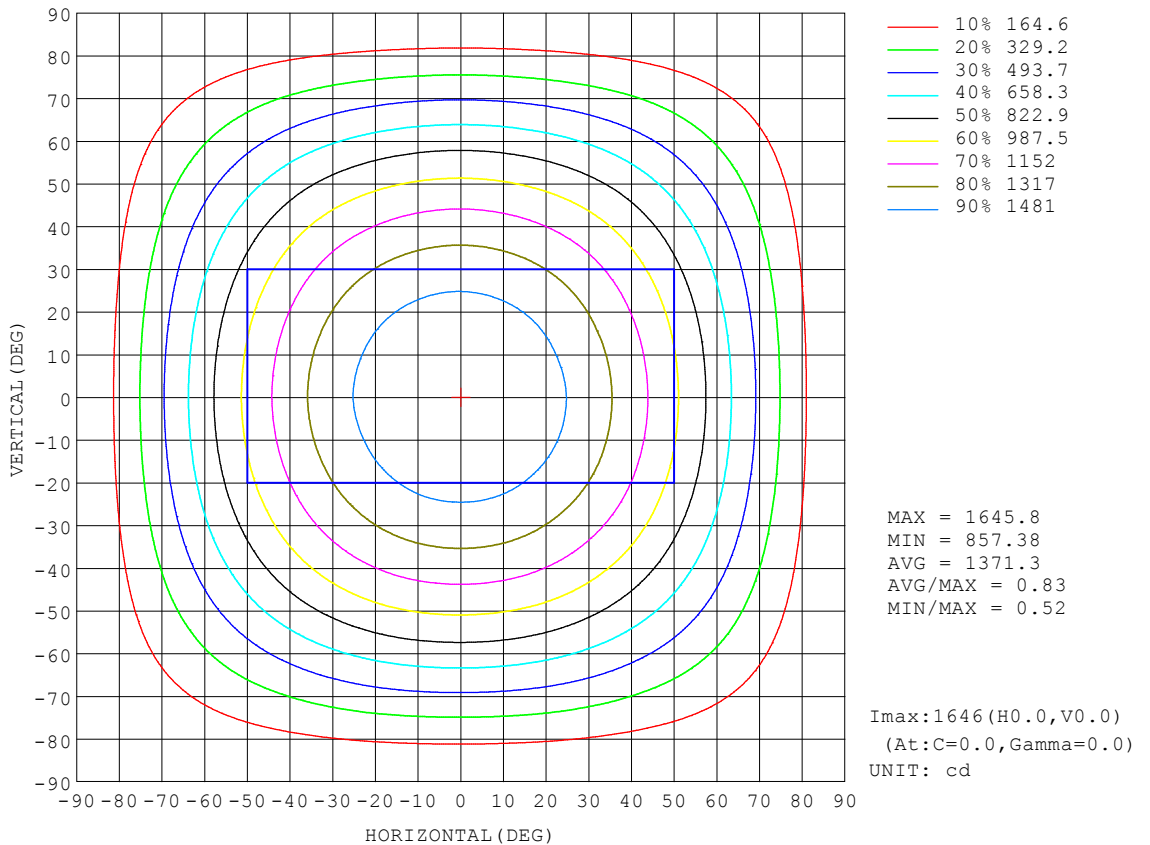


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2022-11-17

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:120.11V I:0.3534A P:42.153W PF:0.9930 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4836.5x1 lm		
NAME: PL1X4-40W-A5C5-P	TYPE: 40W	WEIGHT:
SPEC.: 6000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.55*0.55	Shielding Angle:

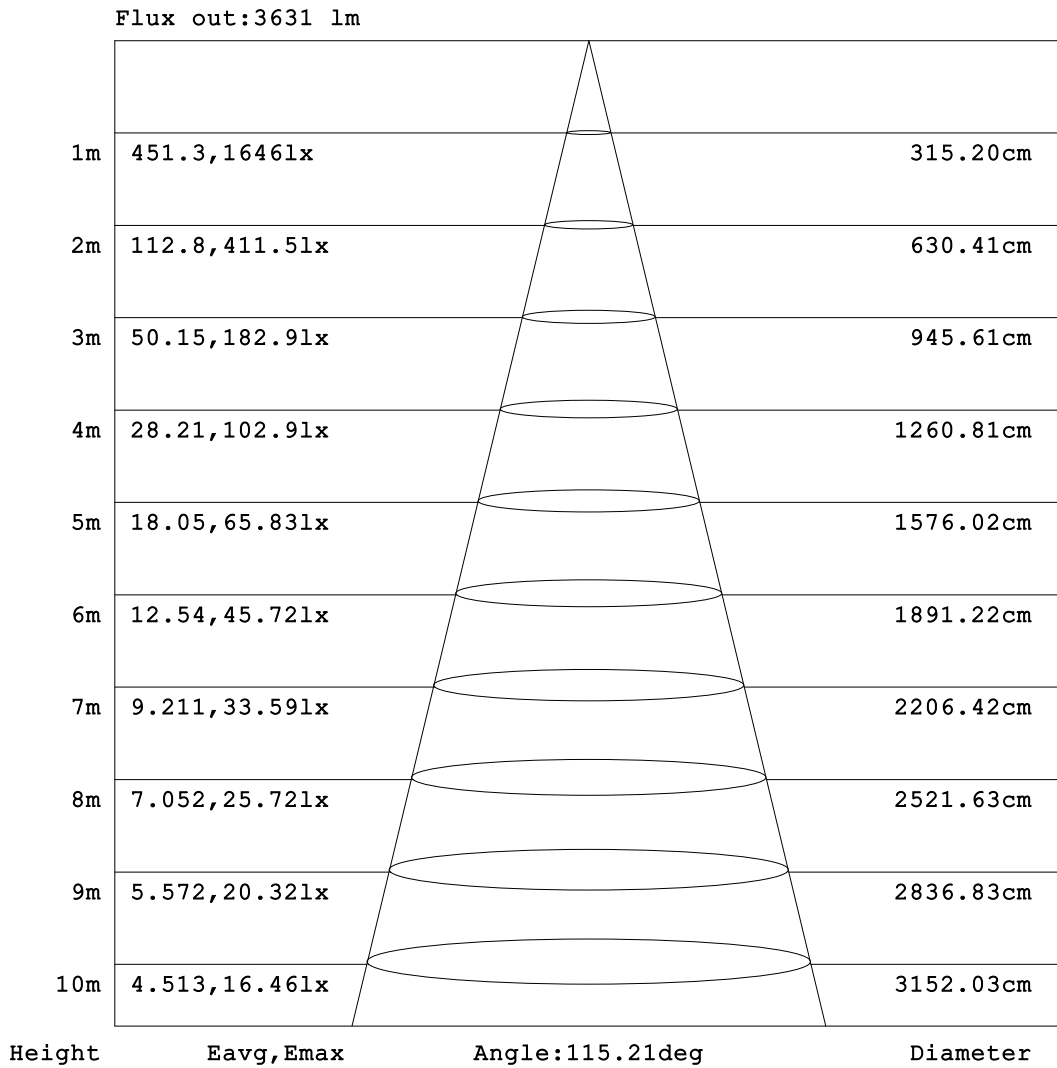


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2022-11-17

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.11V I:0.3534A P:42.153W PF:0.9930 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4836.5x1 lm		
NAME: PL1X4-40W-A5C5-P	TYPE: 40W	WEIGHT:
SPEC.: 6000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.55*0.55	Shielding Angle:

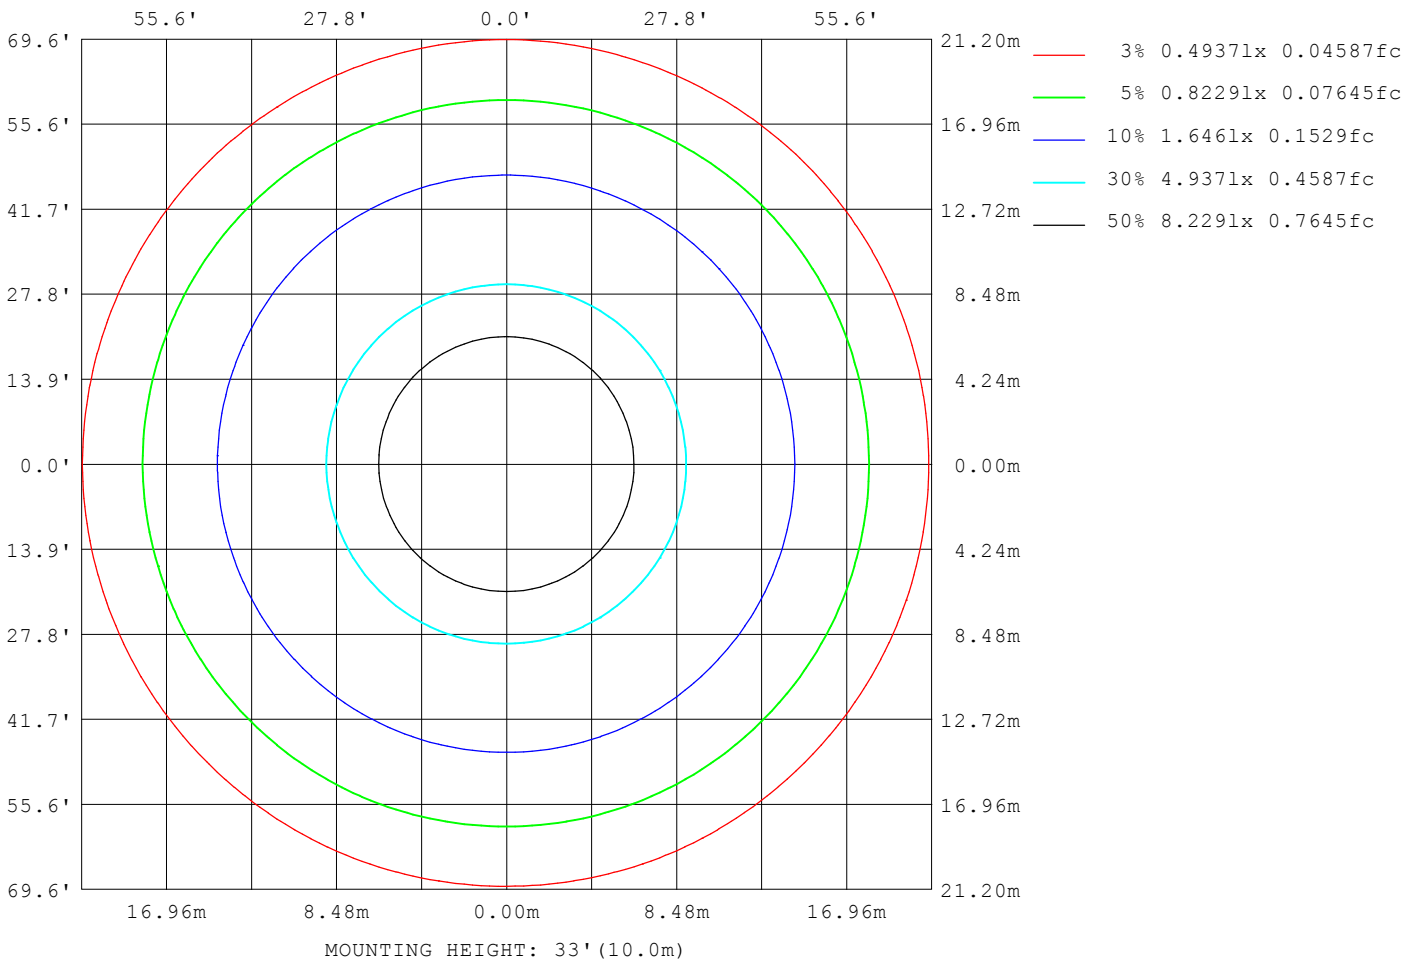

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2022-11-17

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.11V I:0.3534A P:42.153W PF:0.9930 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4836.5x1 lm		
NAME: PL1X4-40W-A5C5-P	TYPE: 40W	WEIGHT:
SPEC.: 6000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.55*0.55	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	4837
L_0~180 (75) av	4197
L_0~180 (85) av	2980
L_90~270 (65) av	4845
L_90~270 (75) av	4277
L_90~270 (85) av	3242
L_45 (65) av	4840
L_45 (75) av	4229
L_45 (85) av	3042

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2022-11-17

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

Planar Illuminance Curve

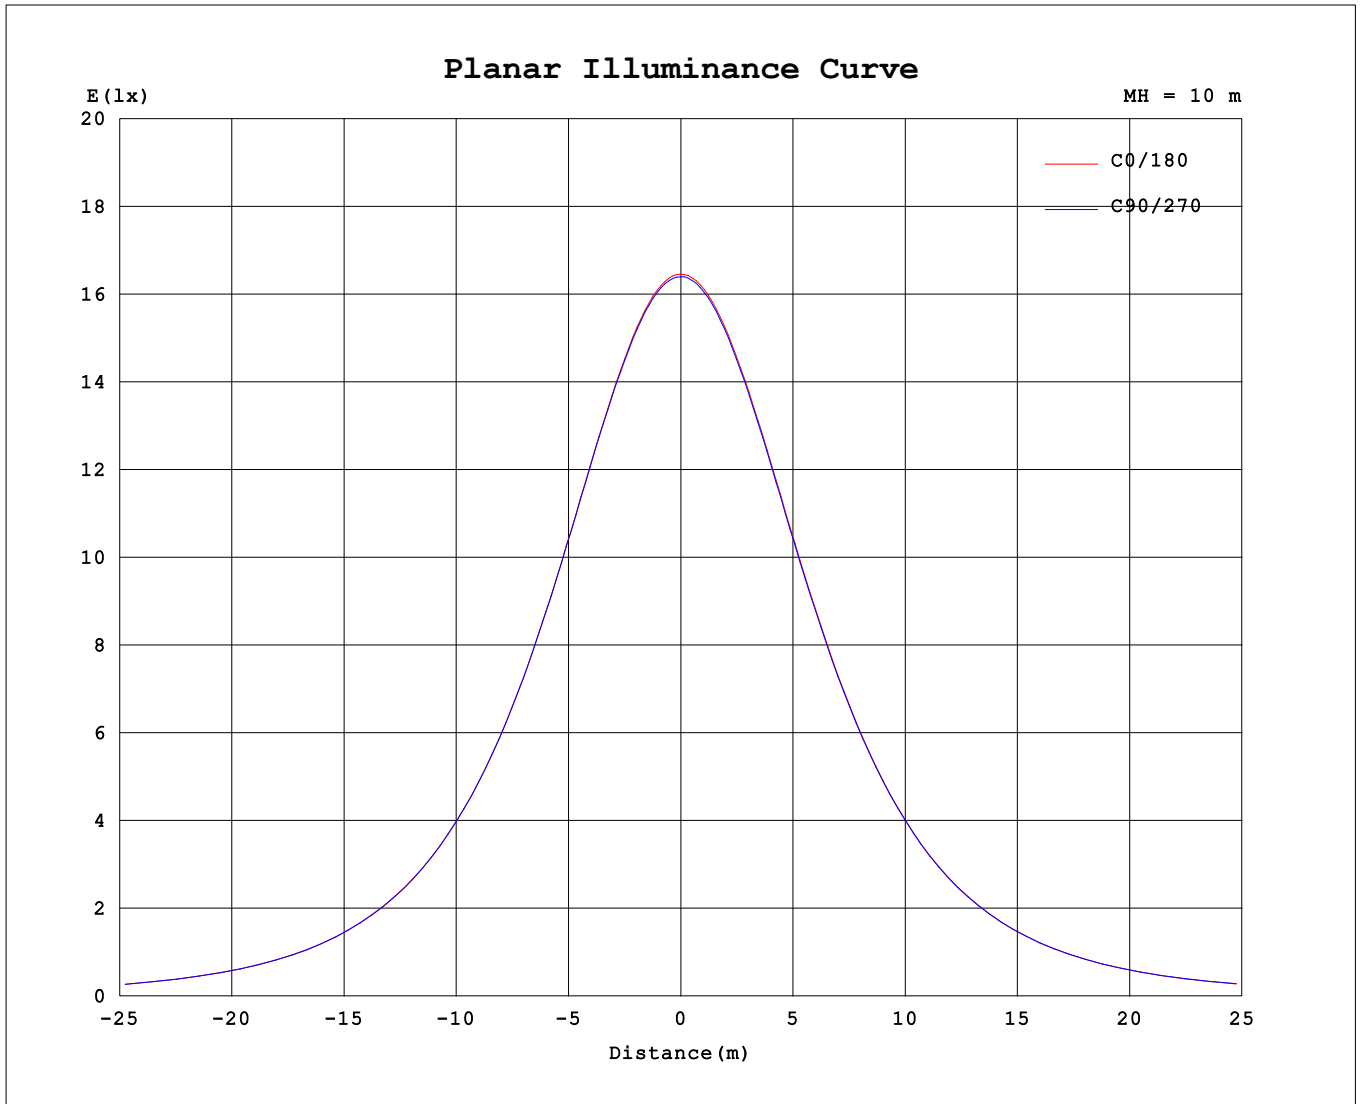

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2022-11-17

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.11V I:0.3534A P:42.153W PF:0.9930 Freq:60.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:4836.5x1 lm		
NAME: PL1X4-40W-A5C5-P	TYPE: 40W	WEIGHT:
SPEC.: 6000K	DIM.:	SERIAL No.: 1
MFR.: EVERFINE	SUR.: 0.55*0.55	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1646	1644	1642	1641	1640	1639	1639	1638	1646	1644	1642	1641	1640	1639	1639	1638			
5	1639	1637	1635	1634	1634	1633	1632	1632	1640	1637	1636	1635	1634	1632	1632	1631			
10	1618	1616	1614	1614	1613	1613	1612	1612	1621	1618	1617	1615	1614	1613	1611	1611			
15	1584	1583	1581	1581	1580	1580	1580	1580	1587	1585	1584	1582	1582	1579	1579	1577			
20	1537	1536	1534	1535	1535	1535	1534	1535	1542	1540	1539	1537	1536	1534	1533	1531			
25	1478	1478	1476	1477	1476	1477	1476	1477	1484	1482	1481	1479	1479	1476	1475	1473			
30	1407	1407	1405	1406	1405	1406	1406	1407	1415	1412	1412	1409	1409	1406	1405	1402			
35	1325	1324	1322	1324	1323	1325	1324	1325	1333	1330	1331	1328	1328	1325	1323	1320			
40	1231	1231	1229	1230	1230	1232	1231	1232	1240	1237	1238	1235	1236	1232	1231	1228			
45	1127	1127	1125	1126	1126	1128	1128	1129	1136	1134	1135	1133	1133	1130	1128	1124			
50	1012	1012	1010	1012	1011	1014	1013	1015	1021	1019	1021	1019	1019	1016	1015	1011			
55	887	887	885	887	886	889	889	890	897	896	899	896	896	893	893	888			
60	754	754	752	754	752	756	756	758	764	763	767	764	765	762	761	756			
65	613	613	611	614	612	616	615	618	624	623	627	626	626	623	622	617			
70	468	469	466	470	469	472	471	473	479	479	483	483	484	481	478	473			
75	323	324	322	327	326	330	326	329	334	334	340	340	343	339	336	329			
80	189	189	189	193	194	195	193	193	198	199	204	206	210	206	201	195			
85	74.9	73.8	73.4	76.9	78.8	78.6	76.7	77.3	82.2	82.5	86.2	88.8	92.2	88.8	84.5	79.7			
90	4.12	3.54	3.17	3.15	3.93	5.24	5.89	5.67	6.48	6.45	6.90	7.45	8.50	9.56	8.82	7.37			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2022-11-17

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.00.461
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks: