



Rear Tire Changing Instructions



Prefer digital? Scan the QR code for our YouTube assembly guide

Disclaimer

Please note your bike warranty does not cover incorrect assembly or installation of parts. To find a recommended service centre near you, please head to nplusbikes.com, or alternatively a local reputable bike shop.



Search to scan for a servicing center near you.




1/ Firstly, remove the gear cable brackets on the right side of the rear hub.





2/ Remove the bolts on both sides of the rear wheel with a 15mm spanner.

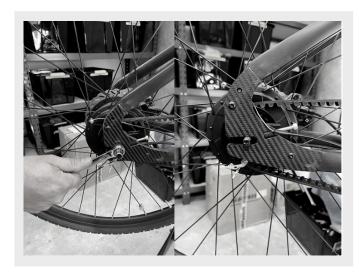

Unscrew the belt tensioner on both sides with a 5mm allen key.




Ensure that the screw is no longer touching on both sides.



5/ Check that tension in the belt has been removed by squeezing the belt.



Gently remove the carbon belt using a plastic tire lever.

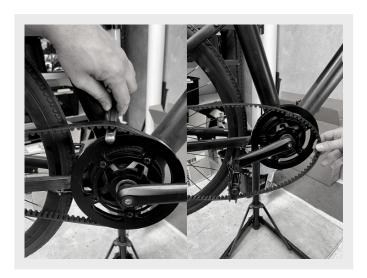


7/ Firmly girp the bike frame and pull the rear wheel backwards to remove.





Replace the tire onto the rim, starting with positioning the Presta valve attachment. Make sure the tire is spinning in the right direction.

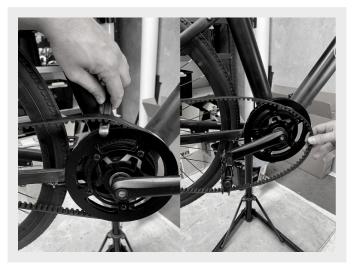





Contact us

Support

US: +1 833-631-0071

UK/EU: +44 808 304 8296

AU: +61 1800 319 714

EMAIL <u>support@nplusbikes.com</u>

Get social

© @nplusbikes_

• @nplusbikes

Official Licensed Product

