


IFC-1000 IV Track System

Ceiling Mounted



Specifications

IFC-1000 IV Track General Specification

The IFC-1000 IV track system is extruded with 6063-T5 aluminum alloy. The exterior profile is 1-9/16" x 15/16" with a .075" minimum wall thickness. Most oval shape tracks can be supplied with just one splice. Two finishes are available, a 204-R1 satin anodize or a white acrylic electrostatic paint. The IFC-1000 track is compatible with the IFC-1007 IV four wheel carrier, this carrier includes 11/16" diameter molded delrin wheels mounted on a solid PVC block with 1018 steel axles and a tru-arc ring of 1/8" x 1-1/4" diameter delrin. One 360 degree counterclockwise turn is required to engage the locked position. End caps are removable one-piece molded nylon forming positive carrier pendant stop and are secured with two hex-head tek drive fasteners.

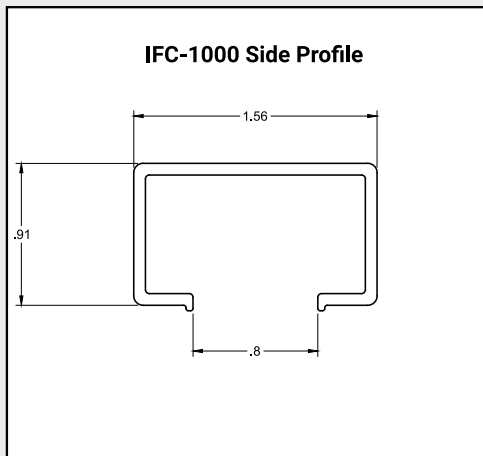

QUESTIONS? CONTACT US
info@imperialprivacy.com

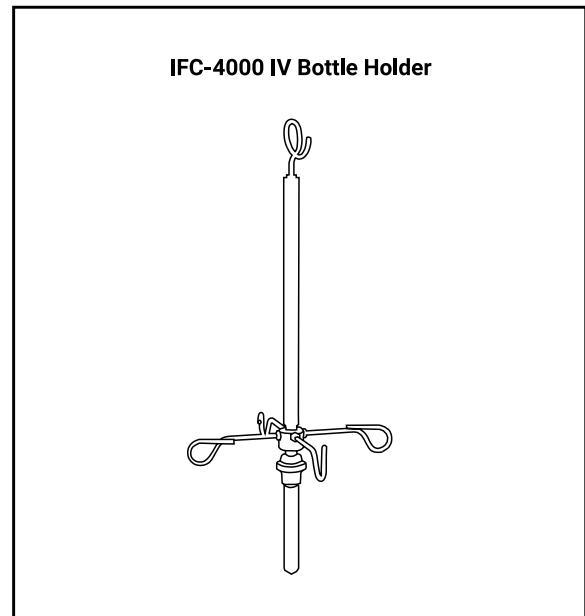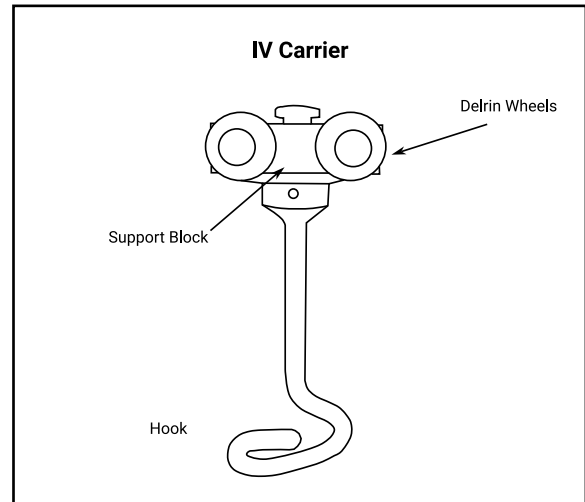

Imperial Privacy Systems LLC
 1400 SW 8th St Pompano Beach, FL 33069
 (954) 782-7130 | www.imperialprivacy.com