

NexFone N303 Entry Level IP Phone

NexFone N303 is an entry-level color screen IP Phone. All the necessary VoIP features provide the high-quality and convenient experience for users.

FEATURE SPOTLIGHT

- 7 SIP lines, 12 SIP accounts, 6-way conference
- 1000 local phonebook, caller ID, call hold, call transfer
- HD audio on speakerphone and handset
- Opus voice: can handle a variety of audio applications, including IP voice, multiparty conference, etc.
- Dual Gigabit ports, integrated PoE
- Stand with 2 adjustable angles of 30 and 45 degrees
- Compatible with major platforms: Asterisk, Broadsoft, 3CX, Metaswitch, Yeastar etc.



TECH SPECIFICATIONS

Audio Features

- HD handset, HD speaker
- Hearing aid compatible (HAC) handset
- Wideband ADC/DAC 16KHz sampling
- Narrowband Codec: G.711a/u, G.726-32K, G.729AB, iLBC
- Wideband Codec: G.722, Opus
- Full-duplex hands-free speakerphone with AEC
- VAD, CNG, AEC, PLC, AJB, AGC
- Packet Loss Concealment
- Dynamic adaptive jitter buffer
- DTMF: In-band, Out-of-Band(RFC2833), SIP INFO

Phone Features

- 12 SIP accounts
- User-defined DSS keys/soft keys, support up to 15 DSS/BLF keys
- Call hold, call waiting
- Call forwarding (Always / Busy / No answer)
- Call transfer (Blind / Attended / Semi-Attended)
- One-touch speed dial, hotline, mute, DND
- Group listening, emergency call
- Redial, call return, auto answer
- Direct IP call without SIP proxy
- Set date time manually or automatically
- Support EHS wireless headset (via external accessories)
- Dial plan, action URL/URI
- uaCSTA
- 6-Way conferencing

User Interface

- 2.7" 192x64 pixel grayscale backlit LCD
- Multiple languages(English/Simplified Chinese/German/French/Dutch/Italian/Spanish/Portuguese/Russian/Japanese)
- LED for call and message waiting indication
- Caller ID with name, number

IP-PBX Features

- Busy Lamp Field (BLF)
- Anonymous call, anonymous call rejection
- Hot desking, intercom, paging
- Message Waiting Indicator (MWI)
- Voice Message
- Call park, call pickup, music on hold
- Call completion, call recording

Directory

- Local phonebook up to 1000 entries
- XML/LDAP remote phonebook
- Black list / White list
- Smart dialing
- Phonebook search/import/export
- Call history: dialed/received/missed/forwarded

Interface

- Dual-port 1G Ethernet
- Power over Ethernet (IEEE 802.3af), class 3
- 1 x Security lock port
- 1 x RJ9 (4P4C) handset port
- 1 x RJ9 (4P4C) headset port
- 1 x Power adapter
- 1 x USB 2.0, Standard A, U disk or USB headset

Feature keys

- 5 DSS Keys with Dual-color (red/green) LEDs
- 1 page turning key
- 4 dynamic Soft-Key
- 3 function keys (call transfer/voice message/redial)
- 4 arrow keys, 1 OK key
- 12 standard telephone number keys
- Volume control keys
- Illuminated mute/headset/hands-free speakerphone key

Management

- Configuration: browser/phone/auto-provision
- Auto provision via FTP/TFTP/HTTP/HTTPS for mass deployment
- Auto-provision with PnP, Zero-sp-touch, TR-069
- Web message capture (Web-based Packet-dump)
- Configuration export/import
- Reset to factory, Package tracing export, system log

Package Features

- Package content:
 - NexFone N303 IP Phone
 - Handset
 - Handset cord
 - Ethernet Cable
 - Stand
 - Quick Start Guide
 - Wall mountable (Optional)
 - Power Adapter (Optional)

Network and Security

- 10/100/1000M Ethernet
- IPv4/IPv6
- IP assignment: static/DHCP/PPPoE
- SIP v1 (RFC2543), v2 (RFC3261)
- Call server redundancy supported
- NAT traversal: STUN mode
- Proxy mode and peer-to-peer SIP link mode
- UDP/TCP/DNS-SRV (RFC 3263)
- Support 802.1x network access authority authentication
- Virtual Private Network (VPN): L2TP/OpenVPN
- Support HTTP/HTTPS service
- Virtual Local Area Network (VLAN)
- Link Layer Discovery Protocol (LLDP)
- Quality of Service (QoS)
- Time and date synchronization using SNTP
- RTCP-XR (RFC3611), VQ-RTCPXR (RFC6035)
- SRTP, Transport Layer Security (TLS1.2)


Other Physical Features

- AC/DC Adapter (optional)
 - AC Input: 100~240V, 50~60Hz
 - DC Output: 5V, 2A
- Power consumption (PoE): 1.55W~10.4W
- Power consumption (PSU): 1.5W~3.5W
- Operating temperature: 0~45°C
- Operating humidity: 10~95%
- Color: Classic Gray
- Stand with 2 adjustable angles
- Dimension: 8.65 x 6.7 x 1.34 inches
- Wall mountable (optional)

Certificated by



Compatible with

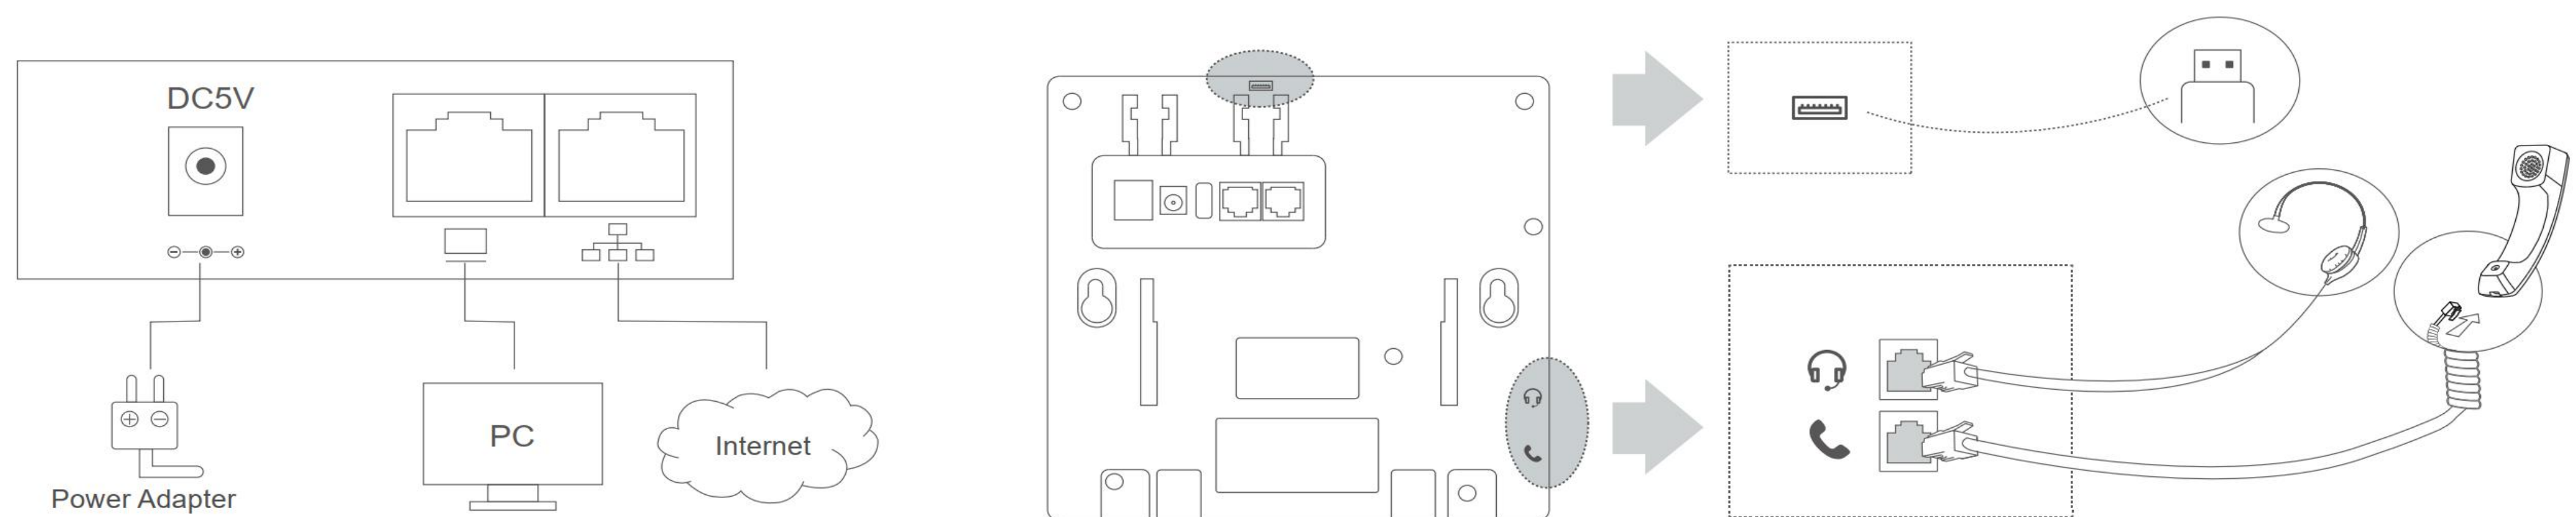

Learn more

For more information on NexFone N303 visit www.nexvoo.com



Copyright

©2021 Nexvoo Inc. All rights reserved. The Nexvoo logo and other Nexvoo marks are owned by Nexvoo and may be registered. All other trademarks are the property of their respective owners.