


Nextview N1000 HD Webcam



Product structure diagram

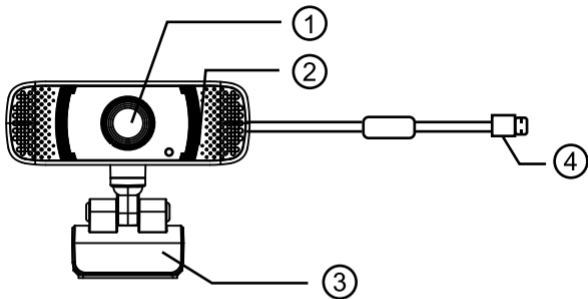

① FULL HD 1080P lens

② MIC Hole

③ Bracket

④ USB Port


Installation steps



- 1 . Turn on the Camera Mount and point the camera toward the front of the display.



- 2 . Press down on the Camera Mount and snap the rear end of the screen mount to the back of the screen.




- 3 . Connect USB data cable

Detail specification

Webcam parameters

Driver type	Driver-free(Plug and play)	USB Line length	150cm
Frequency	50Hz, 60Hz	Resolution	1920*1080
Photo format	Bmp, Jpg	Interface type	USB 2.0
Senser type	1/3" 2MP sensor	Built-in	Sound-absorbing and noise-reduction microphone
Contrast optimization engine	Contrast balance	Focusing range	FULL HD 2MP lens, f=3.6mm, Viewing angle 90°
Application compatibility	Support various chat tools and video conferencing software, Such as: Microsoft Teams, Zoom, BlueJeans, Google Hangouts, Lifesize, Cisco Webex, Vidy, Amazon Chime, etc.		
Standard	Support MJPEG / H.264 / H.265 compression		
Operating systems	Windows 7, Windows 8, or Windows 10 Mac OS X 10.11 or higher		

Package Contents



Webcam*1



Webcam Manual*1

USB connection cable*1

Nextview Inc.

NEXTVIEW® US

www.nextviewstore.com

材质：铜版纸 150克 折叠

名称	SP-1231 N1000 彩盒说明书	制订		日期	20200901
		审核		日期	
机种		批准		日期	
		投影	单位	比例	版本
图号	SP-1231	第一角法	MM		2
版次	A	厦门市凌拓通信科技有限公司 Linktop techonlogy Co.,Ltd.			