



High Country

Instruction manual

CONTENTS

Before using this product, please consult the instruction manual to ensure proper use

Products Brief Instruction

- 1. Product Brief Instruction3
- 2. Product Specification 3
- 3. Product Frame3
- 4. Main Properties and Characteristics4

Installation

- 1. Installing Your Roof Tent4
- 2. Setting Up Your Roof Tent6
- 3. Folding Down Your Roof Tent8
- 4. Tips & Tricks8

Important Information

.....8

Products Brief Instruction:

This High Country roof tent could be set up easily by 2 persons, set up and fold down in seconds by build-in telescopic ladder. Roomy space for a whole family, Keep you safe and comfortable, Enjoy the outdoors where your vehicles arrive in different weather.

Products Specification

- A. The whole frame uses aluminium alloy, parts of joints are made of strong nylon.
- B. Double layer silver coating treatment for outer tent material to offer better heat insulation and waterproof.
- C. 3" foam mattress provides comfortable sleep experience
- D. Telescopic aluminum alloy ladder is removable and endure 150kg

Material:

Fly: 210D rip-stop oxford PU3000mm with silver coating, UPF50+
Inner: 190G rip-stop polycotton PU2000mm
Floor: 210D polyoxford PU2000mm
Cover: 600g/1000D high density PVC
Frame: Aluminum, Telescopic Alu. Ladder

Structure:

Size: 1

Inner Tent size: 140x250x113cm

Packing size: 162x40x145cm

Net weight: 58.5kgs(including ladder)

Gross weight: 70kgs

Size:2

Inner Tent size: 200x250x110cm

Packing size: 225x40x142xm

Net Weight: 77.5kg (including ladder)

Gross weight: 92.5kgs

Product Frame:



Main Properties and Characteristics

Easy handle, by simply pulling & pushing the ladder, the tent can be set up and folded down in few seconds.

Installation

1. Installing your roof tent

A. You must have roof racks correctly fitted to your vehicle before installing the roof top tent



B. Lift the tent onto the rack from car side



C. Adjust the tent to the roof center, ensuring the rear door can be opened/closed







D. Slide the M8X50 hexagon bolt into the rails from both sides ensuring you have positioned 8 in total (see picture 1), replace the plastic covers of your roof racks(see picture 2).



Picture 1



Picture 2

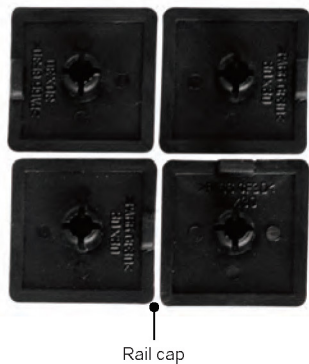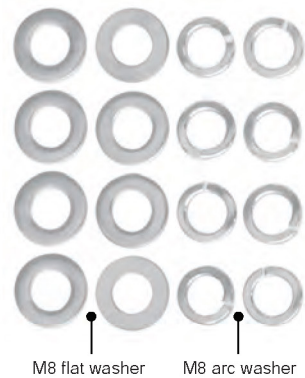

Setting up Your Roof Tent:

1. Pull out the complete telescopic ladder from top of roof tent



2. Use the ladder as a lever to press down and turn over the roof tent



3. Put the ladder to the ground and adjust the ladder length



4. Take out the adjustable supporting poles and insert the pin into the plastic clip



5. Adjust the pole length to the floor and rotate the two parts of poles up and down to lock the pole.

6. Stand on the ladder, pull out the telescopic pole of the porch and lock the pole to offer a biggest porch.



Folding Down Your Roof Tent:

1. Press down two telescopic pole of the porch , lift the ladder to fold the roof tent.



2. Press the ladder's unlocking device and take it on top of roof tent.



3. Use red color rubber strip to tie the rear side of roof tent, cover the durable cover on top of it.



Tips & Tricks

- . Always ensure the tent is dry before packing away.
- . Keep the rail of the base clean and dry.

Important Information

1. When packing away the tent, ensure there is no other objects in the tent (like sleeping bag, pillow).
2. Don't put heavy objects on the tent when the tent is closed.
3. Clean and wipe the tent with wet rag instead of machine washing or hand washing (but the cover of the mattress is washable).
4. Check the connecting points of the tents to the car; ensure all points are probably locked.
5. Please don't jump or other damaging behavior inside the tent or the car tent may probably get damaged due to uneven force.
6. Always keep the tent close when you are driving.
7. If the weather is very windy, please do not open the tent.
8. If there is abnormal noise when setting up or folding down the tent, please check the rail and all connection joints right away.

Problem and solution:

If the tent stops working, check it as flow step,

- a. Check if the screws of Alu pole is loose
- b. Check if the fabric is dragged into the stretcher pole
- c. Check if the rail of base break

Tools:

Accessory pack



6xL100 cross screwdriver



8-10 open spanner



6mm L shape hexagonal wrench



5mm L shape hexagonal wrench



M6x30mm hexagon socket head cap screw



M6 T shape slider block



M6 stainless steel flat washer



M6 spring washer



FreeSpirit Recreation
20495 Murray Rd. Suite 120
Bend, OR 97701

Made in China to Freespirit Recreation exact standards.