

INDY RACING STRIPES

INSTALLATION INSTRUCTIONS



INSTALL TIME

1-3 Hours




REQUIRED MATERIALS & TOOLS

RUBBING ALCOHOL
SPRAY BOTTLE
SQUEEGEE

DETAIL KNIFE
MASKING TAPE
HEAT-GUN

FIAT 124 SPIDER INDY RACING STRIPE

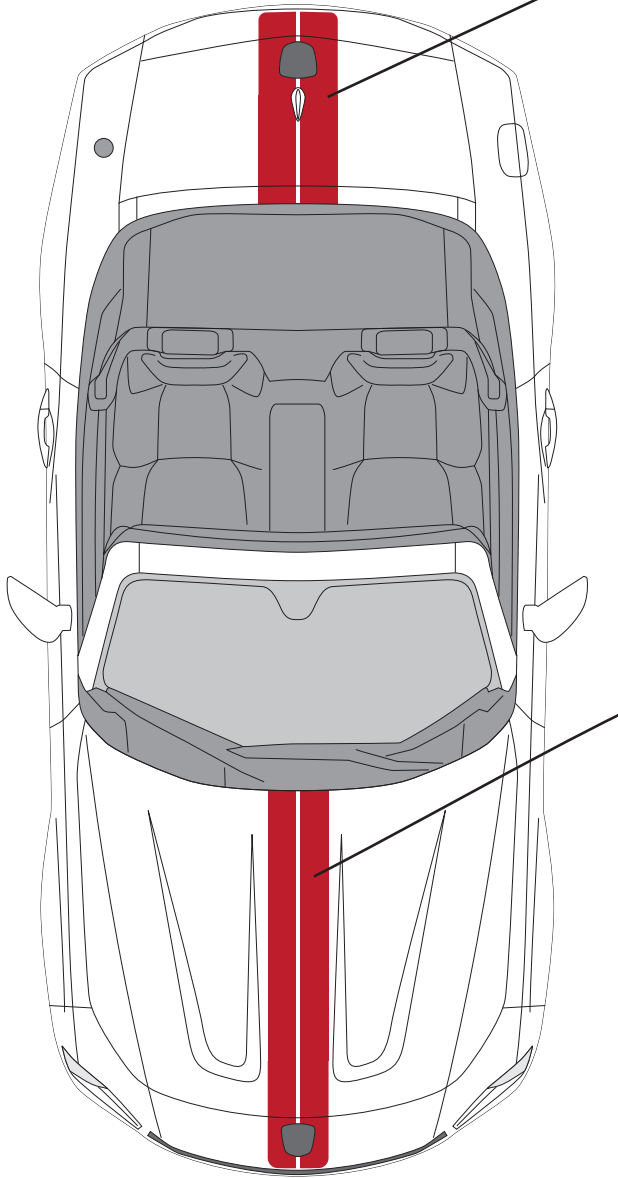

WHAT'S INCLUDED?

1 Deck-lid Stripe (48" in length)

1 Hood Stripe (68" in length)

INSTALLATION NOTES

To ensure proper alignment of the racing stripe we recommend the "wet" application method for beginners, but a "dry" installation will work for experienced installers.

1.) In order to install the rear stripe correctly, removal of the badge and fin attached to the deck lid is required. This can be easily done by opening the trunk, and removing all mounting hardware for the badge and fin.

2.) As with any vinyl installation proper preparation is they key to having a great finished product. After removal of all necessary items from the deck-lid clean the application area with denatured or isopropyl alcohol to remove any dirt, wax, or oils that may exist.

3.) Performing a mock-up before installation typically will yield a better finished product. Using masking tape to create reference points is a great way to ensure a straight, and professional outcome!

4.) When installing the front stripe it is important to note that the fitment around the badge may be tight. This is intentional in order to allow you to tuck the excess vinyl under the badge, without having to remove the front emblem.

5.) The stripes included in this kit have an excess in material length which will likely require minor trimming along the edges of the hood, and deck-lid.

Please allow 24 hours for the vinyl to completely dry and properly adhere to the vehicle. Do not get the vinyl decals wet during this time.