


Digital Battery LCD Dual Charger

DL-Series LCD Charger

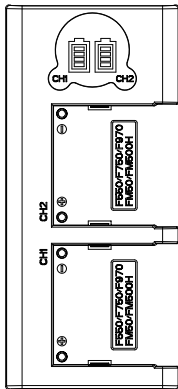

User Manual


Thank you for purchasing our product. For optimum performance and safety, please read these instructions carefully before operating the product. Please keep this manual for future reference.

■ Specification

Input: MICRO USB 5V \equiv 2.1A(MIN)

TYPE-C 5V \equiv 2.1A(MIN)

Output: 8.4V \equiv 700mA \times 1 500mA \times 2



■ Charging Indication

1. When battery is fully charged, the power gauge will be full on LCD indicator.



2. When battery is in charging, the power gauge will blink in order as following way.



3. When battery has problem, the whole power gauge will light up and blink.



■ Caution

1. Please do not charge for battery which voltage is not in the range of charging volt.
2. Charger will be damaged if not using correctly.
3. It is used indoors or in car, please don't expose it to rain or snow.
4. Please do not disassemble or assemble the charger by yourself.
5. Avoid falling or placing heavy object on it.
6. Children should use it at the supervision of adult.
7. Working temperature keeps 0°C~40°C degree.
8. Keep it away from heat equipment or high temperature place, and don't expose to direct sunlight.
9. It is normal to be a little heat while charging.
10. Take out rechargeable battery when don't use charger for charging.