

MyBabiie®

For little people who dream big

MB250i Travel System Instructions



Please always read all the instructions provided carefully before use, and keep the care and maintenance instruction for further reference.

IMPORTANT! KEEP FOR FUTURE REFERENCE

Get to know your MB250i Travel System

Scan the QR code below on your camera app to be linked off to our page to get all the information you need for using your MB250i Travel System. From setting it up to how to fold it down, it's all there!



SCAN ME



WARRANTY

We provide a 1 year warranty against manufacturing or material defects.

The warranty period is effective from the day of purchase and applicable to the UK and Ireland. If you made your purchase from an authorised retailer, please return your product to them.

If you bought your product via our website; mybabiie.com, please contact our Customer Service team via email (info@mybabiie.com). We are happy to refund any product if you change your mind about your purchase (if purchased from our website, mybabiie.com.) As long as you tell us within 30 days of receiving your goods. They must be returned in an unused condition, in the original, undamaged packaging and complete with all original parts and accessories. Proof of purchase is required.

What is not covered by the Guarantee?

- Failure to follow My Babiie user guide and maintenance instructions.
- Damage caused by non domestic use
- General wear and tear, for example: worn wheels, damaged rain covers, worn/tear fabric.
- Deliberate damage, misuse or neglect.
- Product which has been modified, undergone an unauthorised repair or used a non approved spare part.
- Car seats which have been involved in an accident, we recommend all car seats should be replaced if involved in an accident.
- Cosmetic damage.
- Parts subject to normal wear and tear, foam handles, rubber elements of wheels, signs of fabric wear.
- Loss incurred as a result of not being able to use a product whilst waiting for a spare part or repair.

A repair service is available for any item that sustains accidental damage at any point during its lifespan. If the damages are not covered by our guarantee, we will provide a quote for the repair costs on an individual basis. If you find yourself in need of spare parts that are not covered by the warranty, you can purchase each spare part on our website (subject to availability).

To read more about your guarantee, please visit mybabiie.com/guarantee.

Our guarantee is provided by My Babiie Ltd, Registered address: 15 Commercial Road, Paddock Wood, Kent, TN12 6EN .

Your statutory rights are not affected by the guarantee.

Registering your Warranty

To register your warranty please visit www.mybabiie.com/warranties

Registering for your product warranty allows you to claim repairs or replacements if your product develops a fault. It will also help us contact you in the event of a product issue that you may need to be made aware of.

Problems or Questions

If you have any questions about your product then please drop us an email at info@mybabiie.com and we will get back to to you as soon as possible. Alternatively, you can chat to us on our Live Support Chat on our website mybabiie.com or contact us via our social media channels.

Safety & care notes

IMPORTANT, RETAIN FOR FUTURE REFERENCE: READ CAREFULLY

THANK YOU FOR CHOOSING OUR PRODUCT, PLEASE ALWAYS READ ALL THE INSTRUCTIONS PROVIDED CAREFULLY BEFORE USE AND REMEMBER, YOUR CHILD'S SAFETY MAY BE AFFECTED IF YOU DO NOT FOLLOW THESE INSTRUCTIONS. SUITABLE FROM BIRTH WHEN USING THE CARRYCOT AND FROM 6 MONTHS WHEN USING THE STROLLER SEAT UNIT. THE MAX LOAD OF THE STROLLER IS 33 LBS (15KG), NEVER OVERLOAD.

**THIS PRODUCT COMPLIES WITH EN1888-1:2018
BASSINET COMPLIES WITH EN1466:2014**

WARNING: NEVER LEAVE YOUR CHILD UNATTENDED.

WARNING: ENSURE that all the locking devices are engaged before use.

WARNING: MAKE SURE the brake system is engaged when putting or taking out the child.

WARNING: To avoid injury ensure that your child is kept away when unfolding and folding this product.

WARNING: DO NOT let your child play with this product.

WARNING: ALWAYS use the restraint system seat belt to avoid serious injury from falling or sliding out. It may be dangerous to leave your child unattended.

WARNING: Accessories which are not approved by the manufacturer shall not be used.

WARNING: Avoid placing the stroller near naked heat sources such as electric bar fires, gas fires, etc. or where a child could gain access to any other kinds of hazards.

WARNING: ALWAYS use the crotch strap in combination with the waist belt.

WARNING: ALWAYS use the harness provided and make sure the harness is correctly fitted.

WARNING: Any load attached to the handle affects the stability of the stroller.

WARNING: Use the stroller for only one child at a time.

WARNING: The maximum permissible loading for shopping basket is 6.6 lbs (3kg).

WARNING: Excessive weight may cause a hazardous unstable condition to exist.

This seat unit is not suitable for children over 36 months.

WARNING: DO NOT use if any parts is broken, torn or missing.

WARNING: This stroller is not suitable for children over 33 lbs (15kg)

WARNING: Only replacement parts supplied or recommended by the manufacture/distributor shall be used.

WARNING: This product is not suitable for running or skating.

WARNING: DO NOT place the parcels or accessory items or both on the stroller may cause the unit to become unstable.


WARNING: The bassinet is suitable for child under 6 months and the max weight is 19.5 lbs. (9 kg)

Your child's safety is your responsibility


If you have a problem with this product or require replacement parts, please visit www.mybabiie.com/support

Register your product at: www.mybabiie.com/warranties


COMPONENTS

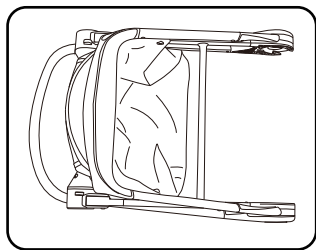


Chassis

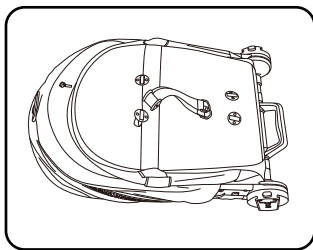


Seat unit

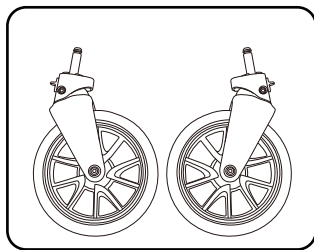


Front wheels

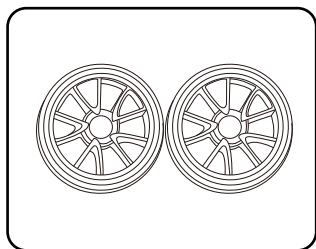


Rear wheels

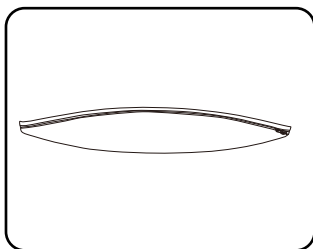


Hood visor




Bassinet

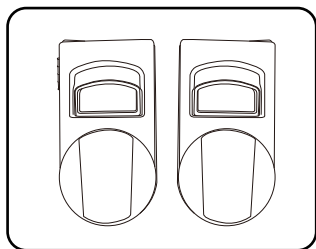


Bassinet adapters



iSize Infant Carrier



Car seat adapters

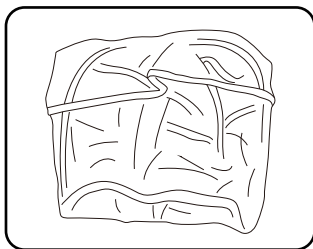


Rain cover

ASSEMBLY INSTRUCTIONS

Unfold the stroller

Take out the chassis from the carton, unfold the chassis firstly by stepping on the rear tube and pulling upward on the handle bar, then lean forward until the folding hinge is fully engaged. The folding mechanism will lock into place when the legs are fully extended. You should hear a clear "click".

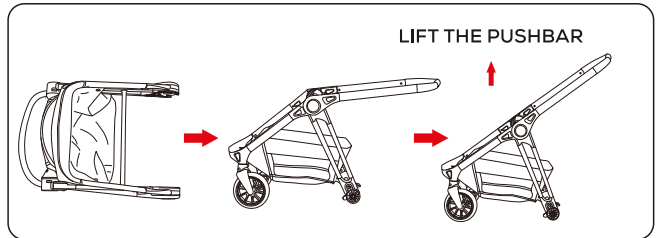

Front & Rear Wheels Assembly

Install front & rear wheels

Push the wheels into the wheel housing until they lock into places. You should hear a clear "click".

NOTE: Pull the wheels to ensure that they are securely attached to the chassis.


Fix the direction of front wheels

Put the front wheels in forward direction and press down the fixer. You should hear a clear "click".

Pull up the fixer and wheel can rotate freely.

Remove the front & rear wheels

Push release button on the side of the front wheel hub and remove the front wheel. Pull the release pin on the side of the rear wheel hub and remove the rear wheel.

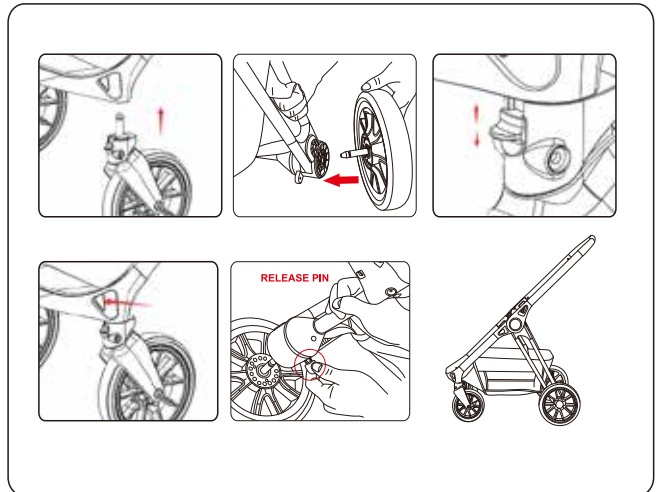


Seat Assembly

Unfold the seat, then install the hood visor on the hood by using the zipper.

Align the seat with the anchors on the side of the chassis and push them together until they install securely. You should hear a clear "click".

Extend the hood to its opening condition and adjust the hood freely according to your desired position.

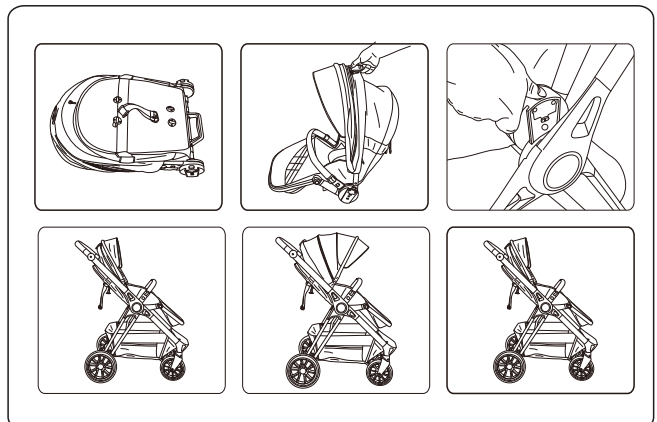


ASSEMBLY INSTRUCTIONS

Seat direction adjustment

The seat can face in either direction, forward or backward.

Press the release button on each side, to take out the seat and adjust the direction of the seat.


Note: Do not adjust the seat direction with the baby inside.



Seat backrest adjustment



To raise the backrest, squeeze the clip on the reclining harness and gently pull up the backrest to the height your required level.

To recline the backrest, squeeze the clip on the reclining harness and gently lower the backrest.

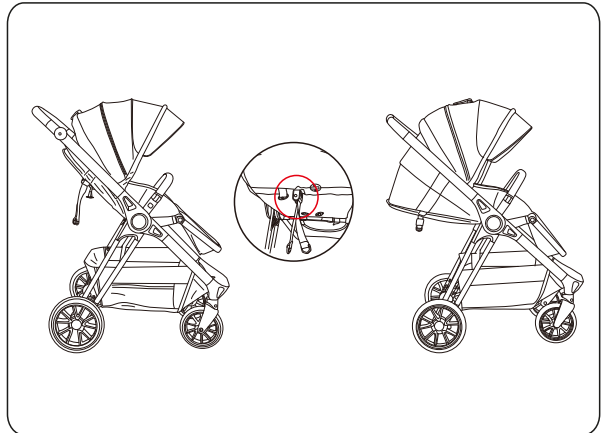

Footrest adjustment

Press the adjustment button on the two sides of the footrest at the same time to adjust up or down.




ASSEMBLY INSTRUCTIONS

Brake operation

To engage the brake, push the brake lever down with your foot. The stroller might have to be required to be rolled back and forth to fully engage the brake. Check that the stroller will not move once the brakes are properly applied.

Release the brake by pushing the brake lever up.

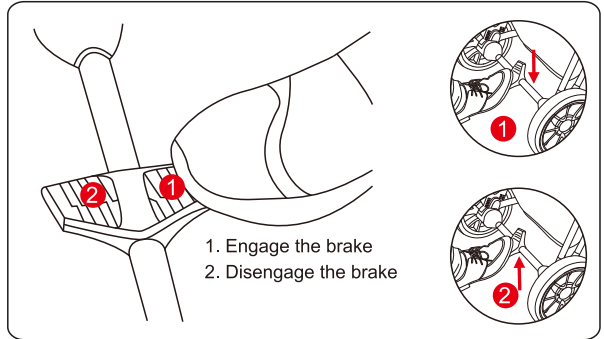


5-point safety harness

Insert the shoulder strap buckle 1 into the buckle housing of center hub. Repeat for the other side 2.

Insert the completed waist buckle 3+4 into the buckle housing too.

Ensure all the buckles engage the housing securely in place.

To release buckles, press center button on buckle housing.

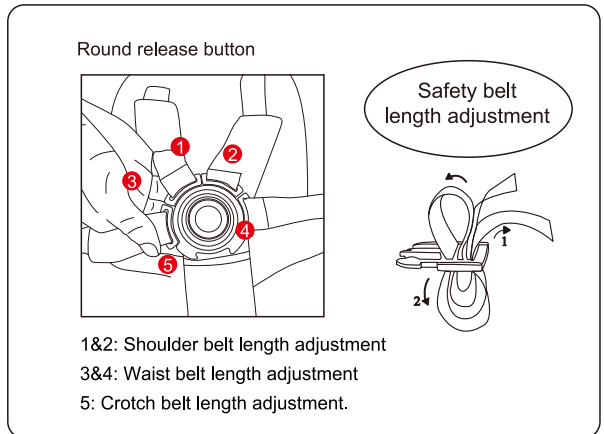

The shoulder straps of the 5-point harness have 2 attachment positions. Select the position that places the shoulder strap level with, or below the child's shoulder.

To adjust harness height unhook the shoulder strap from the crotch buckle. Insert the shoulder strap through the harness spread slots. Insert shoulder strap through the appropriate slot and reattach the shoulder strap to the crotch buckle.


ASSEMBLY INSTRUCTIONS

To fold the stroller

Pull the stroller backward several inches to adjust the front wheels to the front, then fix the front wheels.

Lift the release button on canopy and push forward on the rear edge of hood toward the floor. Secure the stroller in the folded position by pushing the handle bar backwards to be level with the rear frame. You should hear a "click". The stroller can be self-standing after folding.

Note: The stroller can be folded in parent facing position.

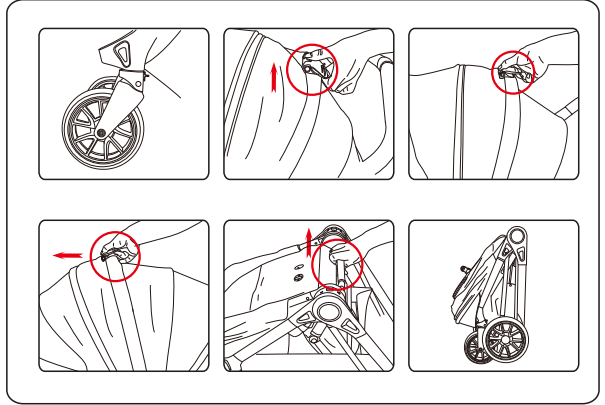


Bassinet assembly

Remove the lining of carrying cot, pull up the 2 rods and lock them into the 4 locations(ABCD) securely, then attach the lining onto the inner side of carrying cot with the zipper.

Install carrying cot adaptor into the slot according to the L & R side direction.


Press down and hold the release button on the adaptor to remove the adaptor.

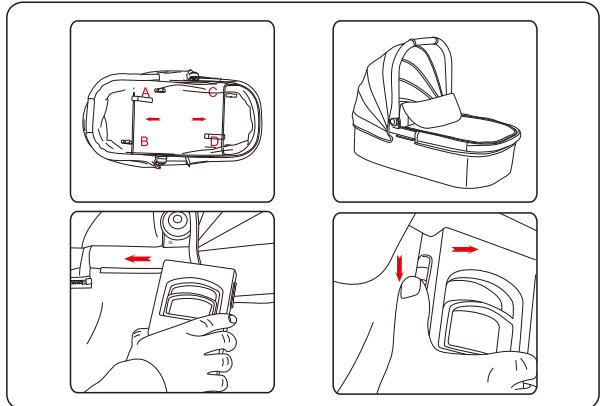

Bassinet assembly

Align the bassinet with the anchors on the side of the chassis and push them together until they install securely. You should hear a clear "click".

Lift up the release button and remove the bassinet when the baby is not inside.

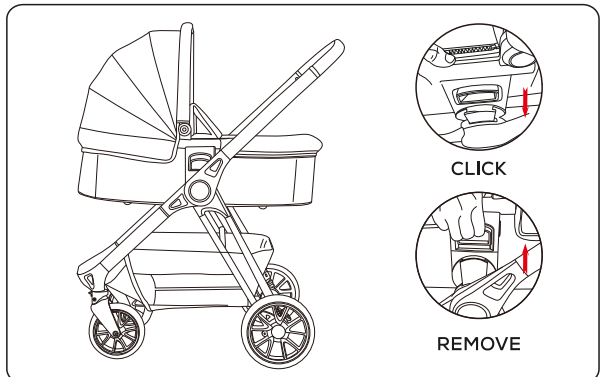

CAR SEAT NOTICE


This is an i-Size Enhanced Child Restraint System. It is approved according to UN Regulation No.129, for use in i-Size compatible vehicle seating positions as indicated by vehicle manufacturers in the vehicle users' manual. If in doubt, consult either the Enhanced Child Restraint System manufacturer or the retailer. Do not use the ECRS in seating positions where there is an active frontal airbag installed.

CAR SEAT WARNING


- For infants of height ranges from 40cm to 87cm. The weight of the child should be less than or equal to 13kg.
- The rigid items and plastic parts of an Enhanced Child Restraint System shall be so located and installed that they are not liable, during everyday use of the vehicle, to become trapped by a movable seat or in a door of the vehicle.
- Do use carry-cots perpendicular to the longitudinal axis of the vehicle.
- Any straps holding the restraint to the vehicle should be tight, any support-leg should be in contact with the vehicle floor, any straps or impact shields restraining the child should be adjusted to the child's body and straps should not be twisted.
- It is important to ensure that any lap strap is worn low down.
- The Enhanced Child Restraint System should be replaced when it has been subject to violent stresses in an accident.
- It is dangerous to make any alterations or additions to the device without the approval of the Type Approval Authority, and it is also dangerous if you do not follow closely the installation instructions provided by the Enhanced Child Restraint System manufacturer.
- Be sure that children are not left in their ECRS unattended.
- Be sure that any luggage or other objects liable to cause injuries in the event of a collision are properly secured in the vehicle.
- Be sure that the Enhanced Child Restraint System shall not be used without the cover.
- Be sure that the Enhanced Child Restraint System cover is not replaced with any other than the one recommended by the manufacturer because the cover constitutes an integral part of the restraint performance.
- Refer to the vehicle manufacturer's handbook for the use of an "i-Size ECRS".

WARNING - Do not install the car seat if there is a storage compartment below the support leg.

KNOW YOUR INFANT CARRIER

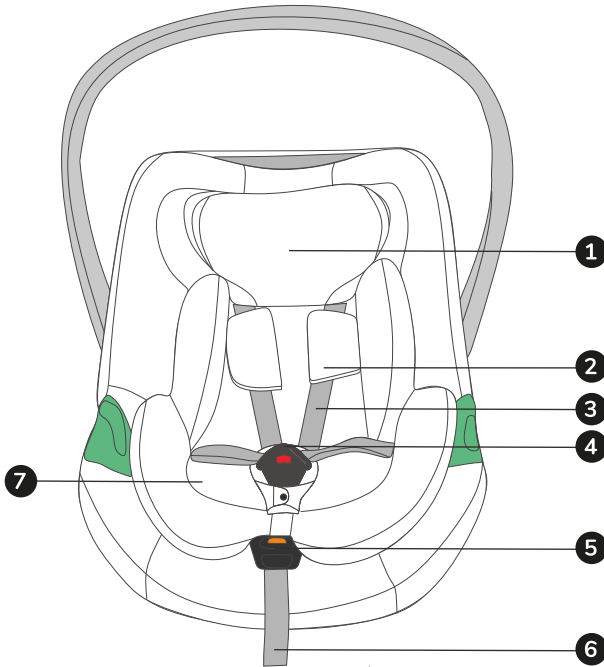

1. Headrest
2. Shoulder pad
3. Shoulder strap
4. Harness buckle
5. Harness release button
6. Harness strap
7. Baby insert

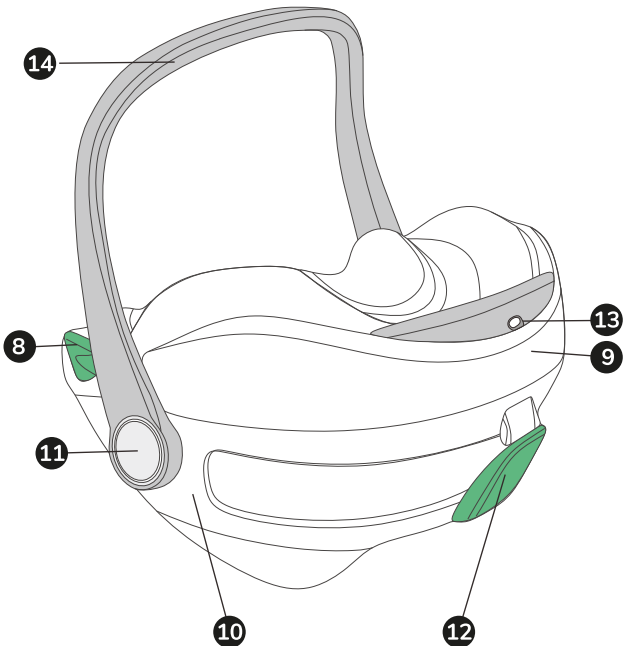

8. Lap belt guide
9. Sun shade cover
10. Seat shell
11. Handle adjuster
12. Diagonal belt guide
13. Headrest adjuster
14. Handle

USE IN THE VEHICLE

1. Certification



... as a child safety seat installed in a vehicle

My Babiie iSize Isofix base Child Safety Seat	Tested and certified according to ECE*R129	
	Applicable size range	Body weight
My Babiie iSize Isofix base	Height from 40cm to 87cm	Up to 13kg

*ECE = European Standard for Safety Equipment

The child safety seat has been designed, tested and certified according to the requirements of the European Standard for Child Safety Equipment (ECE R 129).

The seal of approval E (in a circle) and the approval number are located on the approval label (sticker on the child safety seat).

This approval will be invalidated if you make any modifications to the child safety seat.

Only the manufacturer is permitted to make modifications to the child safety seat.

2. Use in the vehicle


WARNING

Never use this child restraint system in seating positions where an active airbag is installed. An active frontal airbag may cause death or seriously injury of your child in an accident. Please read the instructions carefully and keep safely for future reference.

There is an instructions compartment in the back of the child car seat for storage of the instructions manual.



You can use your child car seat as follows:

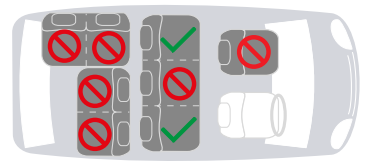

SECURING YOUR BABY


3. Securing your baby

3.1 Securing your baby using the baby insert

For the protection of your baby

The baby insert gives your baby the necessary support while he or she is still small. The baby insert is used to provide extra comfort for very small babies.

Caution! Please use the baby insert attached to this infant carrier when your baby's height is less than 75cm



- Always secure your baby in the infant carrier using the harness.
- Never leave your baby unattended in the infant carrier when placing it on elevated surfaces (e.g. a table, nappy changing unit, etc.).
- Never allow the strap end to become caught in moving parts (e.g. automatic doors, escalators, etc.).
- **Caution!** The plastic parts of the infant carrier heat up in the sun, be aware that your baby may get burnt. Protect your baby and the infant carrier against intensive solar radiation (e.g. by putting a light cloth over the seat).
- The infant carrier requires only one seating position in the car. This advantage means, however, that your baby must be in a semi-reclined position.
- Take your baby out of the infant carrier as often as possible to relieve its spine. We recommend frequent breaks during long journeys. Even outside of the car, please avoid leaving your baby in the infant carrier for too long.

3.2 Adjusting the handle

You can engage the handle in four positions


Simultaneously press both buttons on the handle. Then whilst holding the adjuster pressed turn the handle backwards until it engages in the desired position.

A: Only use for carrying, can not be in this position when installing in the vehicle seat. **Caution!** Ensure that the handle is securely engaged before you pick up the infant carrier.

B: For placing your baby into the infant carrier.

C: For setting the infant carrier down safely outside the car.

D: Should be used when installed on the vehicle seat.

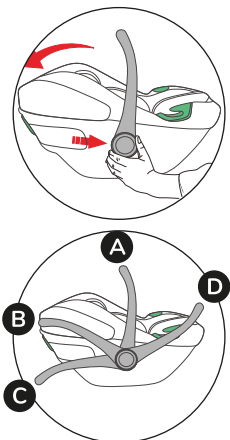

SECURING YOUR BABY


3.3 Adjusting the headrest

A correctly adjusted headrest ensures your baby's optimal posture in the infant carrier.

The headrest must be adjusted so that the shoulder straps are at the same level as your baby's shoulders or slightly above.


To adjust the height of the headrest to fit your baby:

Tilt the headrest adjuster until it disengages. Slide the headrest adjuster until the shoulder straps are at the correct height and re-engage.

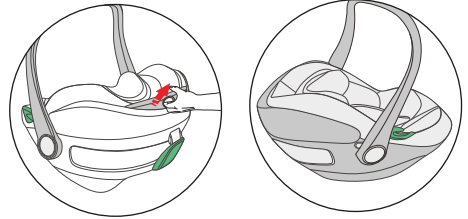


3.4 Loosening the shoulder straps

Press the harness release button and at the same time pull both shoulder straps forward.




3.5 Securing your baby using the harness

- Loosen the shoulder straps.
- Open the harness buckle (press the red release button).

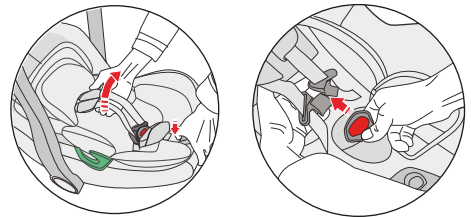

- Place your baby into the infant carrier.
- Put the shoulder straps over the shoulders of your baby, then put the buckle tongues together and engage in the harness buckle with an audible "click".

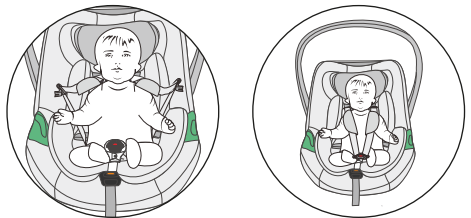

Caution! Do not twist or interchange the shoulder straps.


SECURING YOUR BABY

3.6 Tightening the harness

Pull the strap end.

Caution! Pull the strap end straight towards you, not upwards or downwards.

Please pay attention to the strap end whilst travelling (especially outside the car) it should always be attached to the cover.




3.7 Checklist to ensure that your baby is buckle up correctly



For the safety of your baby, please check that...

- The shoulder straps of the infant carrier are comfortable but are a FIRM fit around your child.
- The shoulder straps are adjusted correctly.
- The shoulder straps are not twisted.
- The buckle tongues are engaged in the harness buckle.



INSTALLATION IN THE VEHICLE

4.1 Installation in the vehicle



Please do not leave your child unattended in the child safety seat in the vehicle.



For the protection of all vehicle occupants

In the case of an emergency stop or an accident unsecured persons or objects may cause injury to other vehicle occupants. Please always check that ...


- The backrests of the vehicle seats are locked (i.e. that a foldable rear seat bench latch is engaged).
- All heavy or sharp-edged objects in the vehicle (e.g. on the parcel shelf) are secured.
- All persons in the vehicle have their seat belts fastened.
- The child safety seat is always secured when it is in the vehicle, even if no child is being transported.

To protect your vehicle

Some vehicle seat covers of sensitive materials (e.g. velour, leather, etc.) may develop wear marks when child seats are used. This can be avoided by placing a blanket or towel under the child seat.




The baby insert is only suitable for infants with height from 40 to 75CM . if your child has height more than 75cm please take out the baby insert .



4.2 Installation instruction for STATURE 40- 87 cm, Rearward facing,


ISOFIX + Support Leg+ harness.

Unfold the support leg until it locks in place.
Press the ISOFIX release button to slide the ISOFIX connectors to the end.

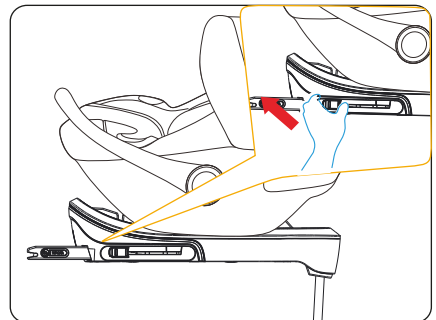


INSTALLATION IN THE VEHICLE

Caution: Please only move to next step when ISOFIX has been slid to the end with the red indicators showing.




Push the ISOFIX connectors directly into the anchorages until you hear an audible "click" sound

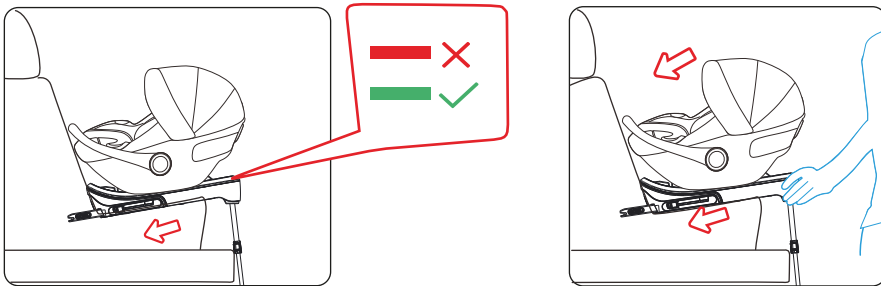


Ensure that the handle is in its upper position D.

Grasp the seat base to check the seat is fastened tightly or shakes, meanwhile observe the ISOFIX red/green indicator. If the seat shakes and the ISOFIX connectors are pulled out, please repeat the above steps and install it again.

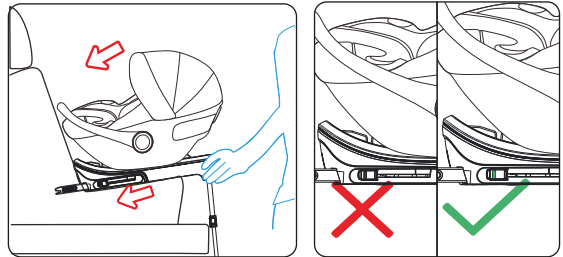

Squeeze the support leg adjusting button, pull out the support leg until it rests firmly on the floor. Observe the ISOFIX red/green indicator to confirm the installation status.

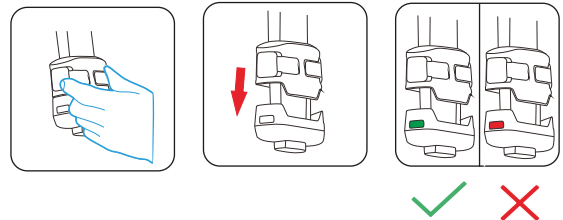


WARNING!

Do not install the car seat if there is a storage compartment below the support leg.

INSTALLATION IN THE VEHICLE

5.1 Installation in the vehicle using the vehicle's seat belt (Not using the Isofix base)

To secure the infant carrier using the 3-point belt of your vehicle proceed as follows:

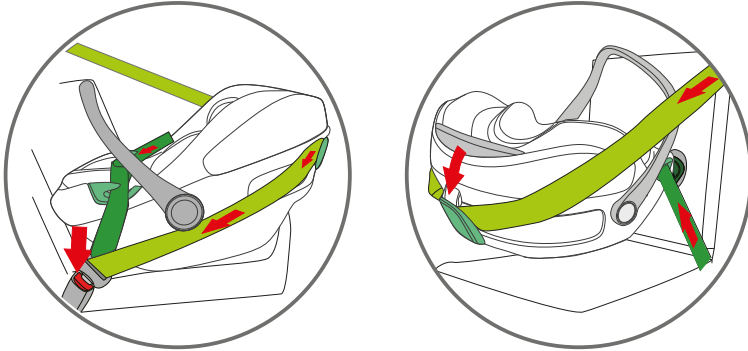

Place the infant carrier rearward facing on the vehicle seat (baby is facing backwards). In certain cases it is possible that the infant carrier does not rest securely or is inclined too steeply on the vehicle seat.

Ensure that the handle is in its upper position D.

Pull out the vehicle seat belt and place it across the infant carrier.

Engage the buckle tongue in the vehicle seat buckle.

Place the lap belt section in the green belt guides on both sides of the infant carrier.

Caution! Do not twist the belt.


Tighten the lap belt section by pulling the diagonal belt section.

Pull the diagonal seat belt section behind the top end of the infant carrier.

Caution! Do not twist the belt.


! For the safety of your baby, please check that:

- The infant carrier is installed rearward facing.
- The infant carrier is only installed on the front passenger seat if no front airbag can strike the infant carrier.
- The infant carrier is only secured using a 3-point belt.
- The lap belt section runs through both green belt guides on the infant carrier.
- The diagonal belt section runs through the light green belt guides on the infant carrier.
- The vehicle seat belt is tightened up and not twisted.



FITTING THE SUNSHADE

6. Pull the head plate to expand/Fold the canopy.

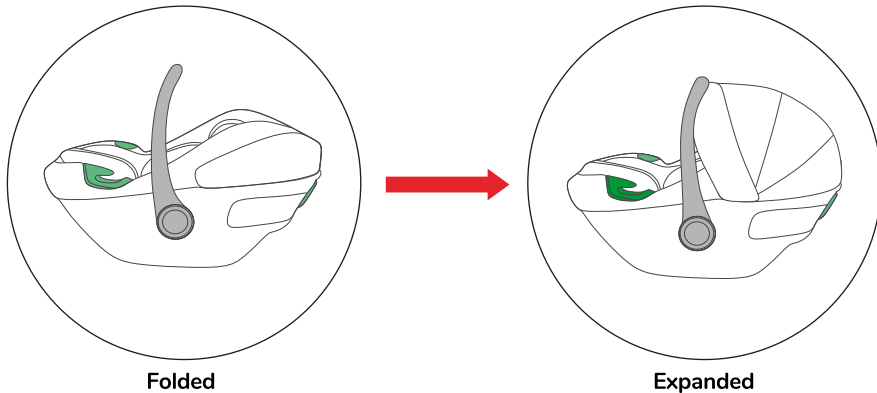

PRODUCT CARE



Follow these instructions for protective product care

- In an accident at a collision speed above 10 km/h the child safety seat could suffer damage which is not necessarily obvious.
- In such cases it is extremely important that you replace the child seat. Please dispose of it properly.
- Regularly check all important parts for damage.
- Ensure the correct operation of all mechanical components.
- To prevent damage or breakage, ensure that the child seat does not become jammed in the car door, seat runners, etc.
- Should the child seat be damaged (for example after dropping it) it must be inspected by the manufacturer.



Care for the harness buckle

The function of the harness buckle is important for the safety of your child. Malfunctions of the harness buckle are mostly attributable to accumulations of dirt and dust.

PRODUCT CARE



Removing the fabrics to clean

1. Undo the button on the side part of the cover.
2. Undo button on the main cover.
3. Press the harness release button and at the same time pull both shoulder straps forward.
4. Undo the button on the main cover and the should pad.
5. Take off the fabric cover and wash it.

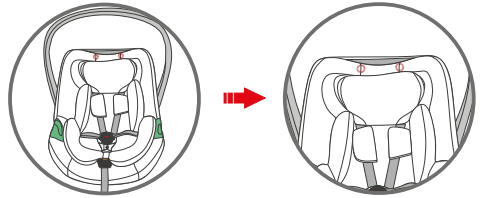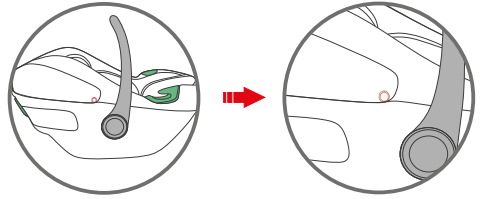

Refitting the fabric cover

To refit the cover on the seat just hook up the elastic loops to the hooks and fit back the headrest cover.

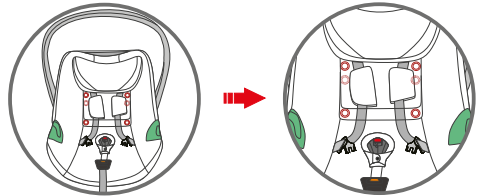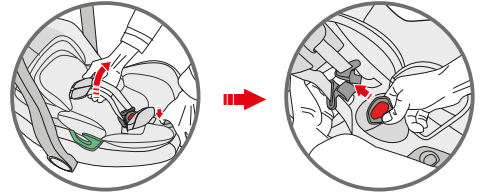

CLEANING

Please be sure to use only original My Babiie replacement seat covers, as the seat cover is important to the proper functioning of the system. Replacement seat covers are available from My Babiie.



The child seat must not be used without the seat cover.

- The cover can be removed and hand washed at 30°C with a mild detergent. Please observe the instructions on the washing label of the cover. The colours of the cover may fade if washed at more than 30°C. Never tumble dry in an electric clothes dryer (the fabric may separate from the padding).
- The plastic parts can be cleaned using soapy water. Do not use harsh cleaning agents (such as solvents).
- The harness can be removed and washed in lukewarm soapy water.


Caution! Never remove the buckle tongues from the straps.

Pushchair do's & don'ts



Do use your brakes!

Ensure the parking brake is engaged during the loading and unloading of children & when the stroller is stationary.




Do always use the restraint system!

Ensure that the child restraint system is correctly fitted at all times.



Do keep your stroller clean and dirt free.

Use a clean white cloth, warm water and a mild detergent to keep your stroller clean.



Do always keep two hands on the handles when pushing.

You could lose control of your stroller if not steering with both hands.



Do follow manufacturers instructions when assembling and using your stroller.

For safety, please refer to our instruction manuals or contact customer support if you're unsure.



Don't use your stroller up and down stairs!

Don't use your stroller up or down stairs or to bump kerbs.



Don't hang bags off the handles!

Bags and other items should not be hung from the handles as this can affect the stability of the stroller.



Don't run or skate with your stroller!

Our products are not suitable for running or skating.



Don't carry the stroller with baby inside!

Our strollers are not designed to be carried with your baby inside them.



Don't put hot drinks in the cup holder.

Hot drinks burn and can easily spill from the bottle holder.



Don't jetwash your stroller.

Some jet washers are very powerful and could damage parts of your stroller!



Don't leave your child un-attended in their stroller.

Always keep your child and stroller in view to avoid accidents.



Don't treat your stroller like a trolley.

Don't load your stroller up with all your shopping as they are not built for this purpose and could cause damage.



Don't use your stroller as a bumper cart!

Damage can easily occur if your stroller is knocked into other things.



Don't smoke around your stroller

We wouldn't want your stroller or little one getting hurt or damaged!



Don't leave your stroller unattended on extreme gradients.

Even with your brakes on your stroller is at risk from tipping or sliding on extreme gradients!



Don't sit in the strollers unless the user is under the guideline weight.

Our strollers are designed to hold a maximum weight. If exceeded this will cause damage!



Do enjoy your product!

Go out and have fun adventures with your little one!

MyBabiie®

For little people who dream big

REGISTER YOUR PRODUCT AT

www.mybabiie.com/warranties

**In the first instance of needing assistance please
contact your original place of purchase.**

This product qualifies for 12 month warranty
when registered through our website

STAY CONNECTED!



My Babiie



@MyBabiieOfficial



My Babiie



@MyBabiie



@mybabiie_official

My Babiie Ltd
Paddock Wood, Kent, TN12 6EN

My Babiie EU
Generaal Vetterstraat 76A, 1059 BW Amsterdam, The Netherlands