


# Dewatering Bag Standard Drawing

The purpose of a Dewatering Bag is to collect sediment contained in the discharged water, to prevent the scour and erosion from water exiting a pipe at high velocity, to defuse the water over a wider area to minimize erosion as the water drains away, and to retain oil contained within effluent.

A SedCatch® dewatering bag or approved equal should be used anytime water is pumped on the site.

## SedCatch® Dewatering Bag

[www.SedCatch.com](http://www.SedCatch.com)

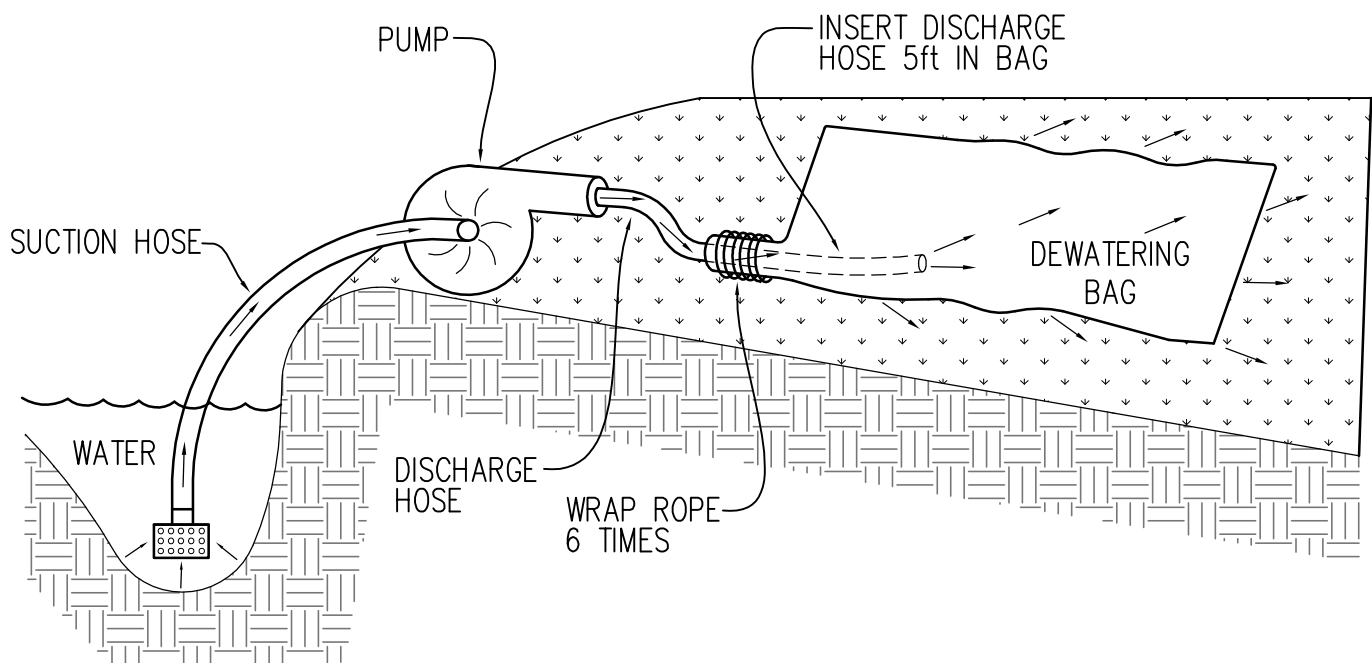

### Installation and Use:

1. Place SedCatch® Dewatering Bag on the ground or on a trailer over a relatively level, stabilized area.
2. Insert discharge pipe a minimum of 5ft. inside SedCatch® dewatering bag and secure with a rope (included) wrapped 6 times around the snout over a 6 inch width of the bag.
3. Replace SedCatch® Dewatering Bag when half full of sediment or when the sediment has reduced the flow rate of the pump discharge to an impractical amount.

### Maintenance and Disposal:

1. Remove and dispose of accumulated sediment away from waterways or environmentally sensitive areas. Slit open Sediment Bag and remove accumulated sediment. Dispose of bag at an appropriate recycling or solid waste facility. OR; as directed by engineer or inspector.