### WARRANTY INFO

La Crosse Technology, Ltd. provides a 1-year limited time warranty (from date of purchase) on this product relating to manufacturing defects in materials & workmanship.

La Crosse Technology, Ltd. 2830 S. 26th St. La Crosse, WI 54601

For Full Warranty Details, Visit: www.lacrossetechnology.com/support

## **CARE + MAINTENANCE**

- Do not mix old and new batteries.
- · Do not mix Alkaline, Lithium, standard, or rechargeable batteries.
- Always purchase the correct size and grade of battery most suitable for intended use.
- Clean the battery contacts and also those of the device prior to battery installation.
- Ensure the batteries have with correct polarity (+ / -).
- · Remove batteries from equipment that will not to be used for an extended period.
- · Promptly remove expired batteries.

### FCC STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and

(2) This device must accept any interference received, including interference that may cause undesired operation.

#### Caution!

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

All rights reserved. This manual may not be reproduced in any form, even in part, or duplicated or processed using electronic, mechanical or chemical process without the written permission of the publisher. This booklet may contain errors or misprints. The information it contains is regularly checked and corrections are included in subsequent editions. We disclaim any responsibility for any technical error or printing error, or their consequences. All trademarks and patents are recognized.

**WARNING:** This product can expose you to chemicals including styrene, which is known to the State of California to cause cancer. For more information go to: <a href="https://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>



# ADD-ON POOL SENSOR




Model: LTV-POOL DC: 040120

More information online at: bit.ly/ltv-pool

## **POWER UP**

Insert 2-AA batteries into the Pool Sensor's Battery Compartment. Securely reattach the twist-on Battery Cover, ensuring the lines meet correctly to prevent water from entering.

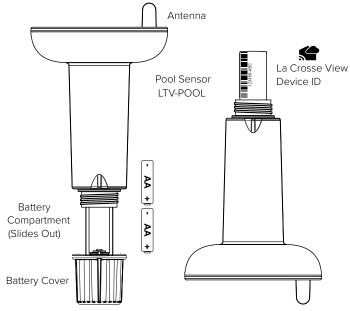

Note: Battery Compartment slides out partway to insert batteries.

### Page I 2

## CONNECT TO LA CROSSE VIEW™ APP



If you already own a La Crosse View connected display, you can use your La Crosse View app to monitor your Pool Sensor's readings, as well as set temperature alerts right on your phone.

- 1. Open your La Crosse View app and select ADD DEVICES from the main menu.
- 2. Scan the Bar Code or type in the Device ID on the side of the Battery Compartment.
- Give the device a Name and Location, and press Save. Within the next few minutes you should begin seeing your Pool Sensor's data within your app.

**Note:** The LTV-POOL sensor is fully functional without being connected to the La Crosse View app.

## **SPECIFICATIONS**

Temperature Range: 50°F to 122°F (Fahrenheit only)
Transmission Range: Over 400 ft. (121.92 meters)
RF 915MHz (open air)

Transmission Interval: About every 60 seconds (samples every 30 seconds)

Power: 2-AA IEC LR6 batteries (not included)

Battery Life: Over 24 months

Dimensions: 3.79" W x 6.59" L x 3.79" H

 $(9.62 cm W \times 16.73 cm L \times 9.62 cm H)$ 

Page I 3