


Portable & Mobile Loading Dock Ramps



CONTAINER TRUCK LOADING UNLOADING SOLUTION:

Our yard ramps eliminate double handling and cuts loading/unloading time, speeding up your operation, saving you time and money while dramatically improving operational safety!

Structure:

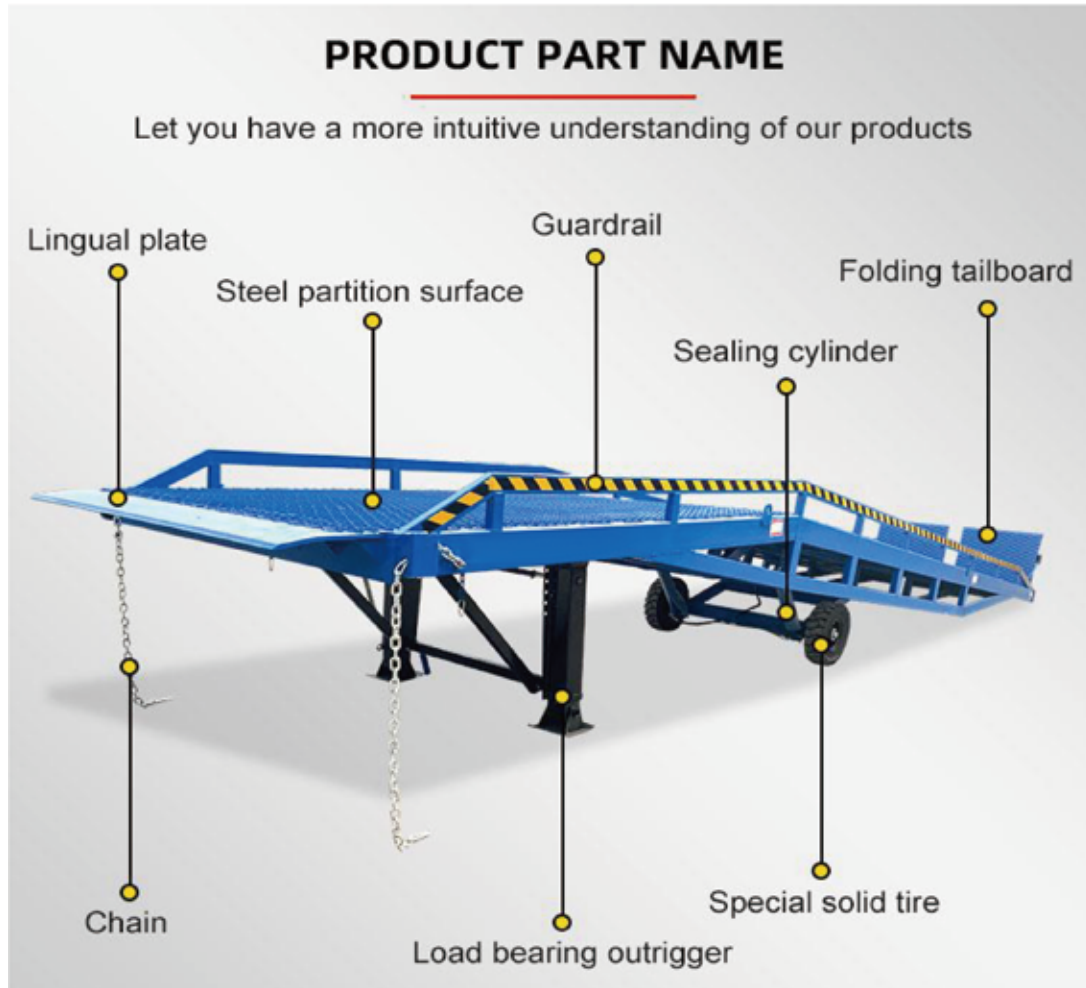

How the mobile ramp works:

Mobile loading dock ramp of lifting platform: It is a cargo loading and unloading auxiliary equipment used in conjunction with a forklift, which can be used according to the vehicle. The height of the carriage is adjusted, and the lifting range is 1.0-1.8m. With the help of this equipment, the forklift can directly drive into the interior of the car for batch loading and unloading operations. It only needs one person to operate and no external power supply is needed to realize safe and fast loading and unloading of goods, which can not only reduce your labor intensity, but also double the loading and unloading. Improve operating efficiency, speed up material circulation, and obtain greater economic benefits. Applicable places: large enterprises, warehouses, factories, stations, Wharf, warehousing and logistics base, etc.

Instructions:

1. Put the tailgate down



2. Tighten the hand pump valve clockwise



3. Press the hand lever up and down to adjust to a height higher than the floor of the car



4. If Electric mode, press up and down button to Achieve rise and fall



5. Back the truck under the tongue plate and apply the handbrake

6. Unscrew the valve of the hand pump clockwise put the carrier board on the bottom of truck



7. Steel chains-the ramp is fixed to the truck for safe operation



8. Put the stopper behind the tire



9. Fully relieve the pressure of the oil cylinder, and the oil cylinder is in a no-pressure state during use



10. Place the manual outrigger in a vertical state, crank it until it touches the ground and fix it, and then fix the pivot pin.

