


30"w x 30h Side Hinge



Recommended Rough Opening: 31"w x 31"h

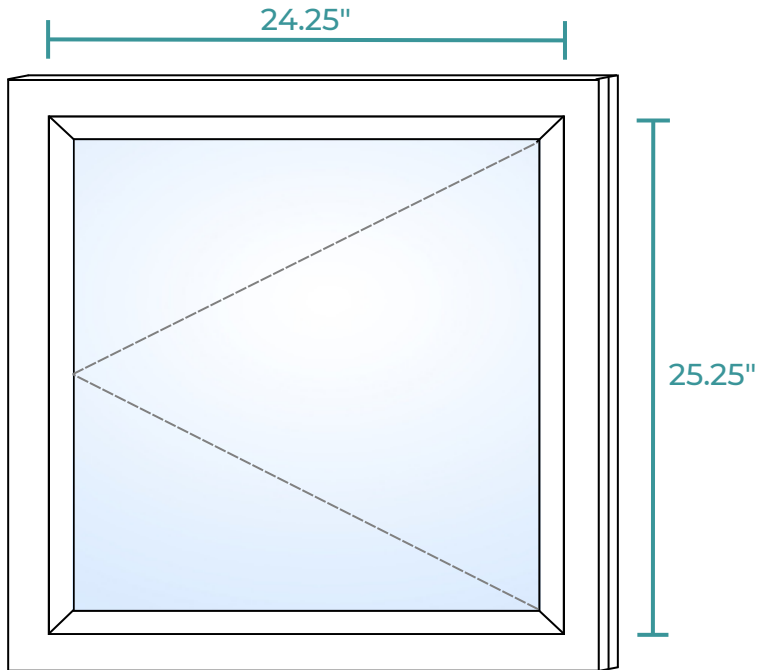

Measurement	Dimension	Area	Frame Thickness
Window Frame	30"w x 30"h		3.25"
Clear Opening	24.25"w x 25.25"h	4.25 Sq. Ft.	
Visible Glass	22.75"w x 22.25"h	3.59 Sq. Ft.	

Component Details

PVC frame and sash with mitre cut welded corners
Aluminium lock and keeper mechanisms
Steel frame and sash hinge brackets
Removable spring-loaded insect screen

Glass Details

Double Pane
Argon Gas Filled
Low-E 180 Coating
U-factor: 0.22*

In-swinging | can be left or right hinged

Testing Details

Forced-entry Resistance
Test (ATSM F588)
F10 Rating

Thermoplastic Corner
Weld Test (Clause 9.3.6.2)
Pass

Air Leakage Resistance Test (ATSM E283)

R class A3 Level

Infiltration = 0.035 cfm/ft² - A3 Level

Exfiltration = 0.036 cfm/ft² - A3 Level

Water Penetration Resistance Test (ATSM E547)

No Leakage or trapped water at 260 Pa

Water Application Rate: 1.492 L/min

*To mitigate against supply chain disruptions, we source glass from multiple suppliers. There may be a slight difference in the U-factor depending on the glass used in each unit.



+1 (833) 565-1199



hello@thegreategyressco.com



2236 Shirley Drive, Kitchener



www.thegreategyressco.com