



Sunny Day Sunglass Case

SEWERS CLUB

Sewing, delivered.

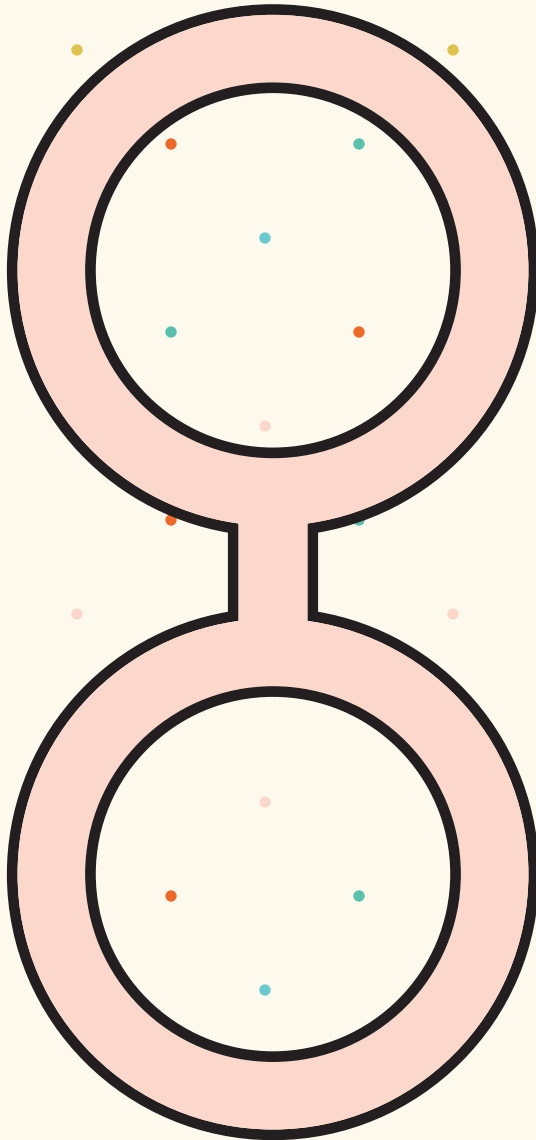

Sunny Day Sunglass Case by Serina Victoria for Sewers Club
All text and images owned and created by Sewers Club.
No part of this pattern may be reproduced in any form without the
express written consent of the author.
www.sewersclub.com

Finished size: Approximately 4" x 8½"
Pattern by Serina Victoria for Sewers Club

Materials

Fat Eighth of Exterior A (Pink)
Fat Eighth of Exterior B (Blue)
Fat Eighth of Lining (Orange)
Fat Eighth of Fusible Fleece (Light Pink)
Fat Eighth of Fusible Webbing (Grey)
Snaps of your choice (Optional)

Cutting

| Exterior A | Exterior B | Lining |
|--------------|-------------|--------------|
| (2) 8½" x 5" | (2) 3" x 6" | (2) 10" x 5" |
| (1) 2" x 4" | | |

| Fusible Fleece | Fusible Webbing |
|----------------|-----------------|
| (2) 8½" x 5" | (2) 3" x 6" |

Applique

Trace the sunglass image on the paper side of the 3" x 6" fusible webbing.

Fuse the glue side of the fusible webbing to the wrong side of the 3" x 6" Exterior B rectangle.

Cut the sunglass image and peel the paper backing. **Tip:** When removing the paper side of the fusible webbing, a pin is helpful to tear an initial hole of the paper to easily peel it. Peeling from the edges will cause the fabric to fray.

Center the image on the right side of the 8½" x 5" Exterior A rectangle as pictured. Following the manufacturers instructions, fuse and sew around to secure the sunglass image.

Optional: Repeat the applique steps for the backside with the remaining Exterior A and Exterior B rectangles.

Sewing ¼" Seam Allowance Throughout


Fuse the two 8½" x 5" rectangles of fusible fleece to the wrong side of the two 8½" x 5" Exterior A rectangles.

Pair each 8½" x 5" rectangle of Exterior A with a 10" x 5" rectangle of lining, creating two pairs.

Keeping right sides together, match the top 5" sides and sew across to make your two panels. Press and open, sewing a top-stitch ¼" below the seam on the Exterior A side as pictured.

Pay attention to the direction of the fabric when sewing the lining to the exterior pieces. The top of the fabric should be the 5" side sewn in the previous step. This will ensure that your lining is not upside down.

Note: A Fat Eighth Measures 9" x 21"

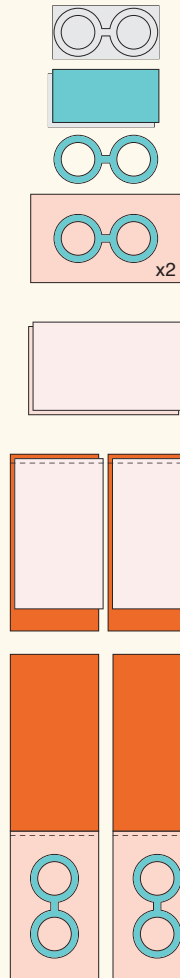

Side Tab

With the 2" x 4" rectangle, mark the middle on the wrong side of the 2" side. Fold the 4" edges in to meet the middle. The two raw edges should touch.

Press and fold again in half so raw edges are folded in. Sew a top-stitch to secure the fold, creating your side tab.

Fold the tab in half, basting it in place ½" down from the seam joining the lining and exterior. The tab should be sewn to the Exterior A side.

Assembly

With your two front and back panels, put right sides together and match center seam. Sew around leaving a 2½" opening in the lining to turn the case inside out.

Turn the case inside out with raw edges of opening turned in. Press and sew to secure.

Once turned inside out, tuck the lining in, leaving a rim of lining showing on the exterior of the case.

Snap Application

Using snaps of your choice follow the application steps provided on the package. Apply the snaps centered on each side of the case as pictured. This is optional.

Note: You will notice during assembly of the case that your lining is longer than your exterior pieces. This is intentional so that when the lining is tucked into the case there is a rim of the lining showing on the top as pictured for detail.

