

# AS 4-3000 TC



## Specification


Model	Audex AS 4-3000 TC
Outlet	100mm
Motor Power	30kW 40HP
Rated Current	54A
Max Capacity	2833L/min (170m <sup>3</sup> /h)
Max Head	78m
Impeller Passage	6mm
N.W	375kg
G.W	415kg
Dimensions	1490 x 490 x 720mm

*Pump photo is for illustrative purposes only.*

## Description

- Rigid cast iron body and motor for long lasting durability.
- A greatly increased maximum submersion depth due to the mechanical seal being resistant to high pressure.
- Mechanical seal and motor cooled by the pumped medium even when the pump is only partially immersed.
- Effective motor cooling due to discharge channel cast as part of the motor housing.
- Top outlet allowing the user to submerge the pump in a confined area.

## Performance

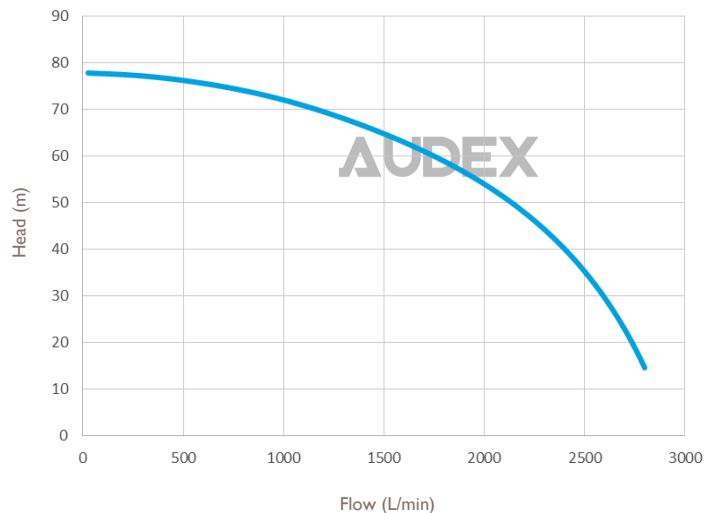

## Applications

- Mines, quarries, coal ore and slurries
- General pumping purposes
- Civil engineering

# AUDEX

**Designed with your industry in mind**

**T:** +44 (0)800 118 2500  
**E:** [info@intraxglobal.com](mailto:info@intraxglobal.com)  
**W:** [audexpumps.com](http://audexpumps.com)

*Audex Pumps are part of the Intrax Global Group. 23.04.19*