

AS 4-550 TC



Specification


Model	Audex AS 4-550 TC
Outlet	100mm
Motor Power	5.5kW 7.5HP
Rated Current (400V)	11.4A
Max Capacity	1750L/min (105m ³ /h)
Max Head	23m
Impeller Passage	8.5mm
N.W	77kg
G.W	84kg
Dimensions	750 x 350 x 360mm

Pump photo is for illustrative purposes only.

Description

- Rigid cast iron body and motor for long lasting durability.
- A greatly increased maximum submersion depth due to the mechanical seal being resistant to high pressure.
- A semi-open impeller made of high chrome alloy and a wear plate made of ductile iron.
- Effective motor cooling due to discharge channel cast as part of the motor housing.
- Top outlet allowing the user to submerge the pump in a confined area.

Performance

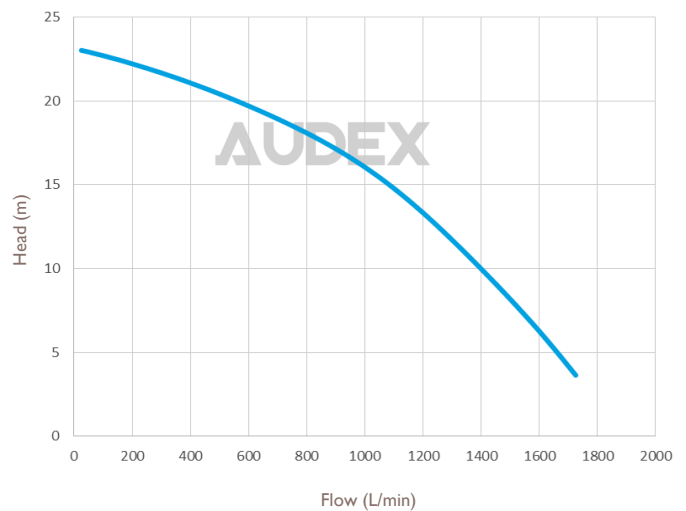

Applications

- Mines, quarries, coal ore and slurries
- General pumping purposes
- Civil engineering

AUDEX

Designed with your industry in mind

T: +44 (0)800 118 2500
E: info@intraxglobal.com
W: audexpumps.com

Audex Pumps are part of the Intrax Global Group. 23.04.19.