

AS 6-3700 TC



Specification

Model	Audex AS 6-3700 TC
Outlet	150mm
Motor Power	37kW 50HP
Rated Current	66A
Max Capacity	3666L/min (220m ³ /h)
Max Head	83m
Impeller Passage	6mm
N.W	570kg
G.W	615kg
Dimensions	1550 x 600 x 870mm

Pump photo is for illustrative purposes only


Description

- Rigid cast iron body and motor for long lasting durability.
- A greatly increased maximum submersion depth due to the mechanical seal being resistant to high pressure.
- Mechanical seal and motor cooled by the pumped medium even when the pump is only partially immersed.
- Effective motor cooling due to discharge channel cast as part of the motor housing.
- Top outlet allowing the user to submerge the pump in a confined area.

Applications

- Mines, quarries, coal ore and slurries
- General pumping purposes
- Civil engineering
- Deep well pre dewatering or high head dewatering

Performance

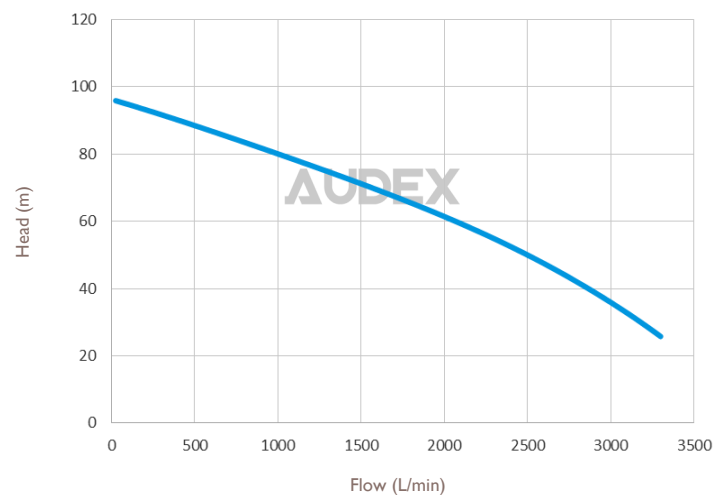

AUDEX

Designed with your industry in mind

T: +44 (0)800 118 2500
E: info@intraxglobal.com
W: audexpumps.com

Audex Pumps are part of the Intrax Global Group. 23.04.19.