

# AS 6-7500 TC



## Specification


Model	Audex AS 6-7500 TC
Outlet	150mm
Motor Power	75kW 100HP
Rated Current	132A
Max Capacity	3300L/min (198m <sup>3</sup> /h)
Max Head	130m
Impeller Passage	8mm
N.W	830kg
G.W	880kg
Dimensions	1760 x 620 x 940mm

*Pump photo is for illustrative purposes only*

## Description

- Rigid cast iron body and motor housing for long lasting durability.
- A greatly increased maximum submersion depth due to the mechanical seal being resistant to high pressure.
- Mechanical seal and motor cooled by the pumped medium even when the pump is only partially immersed.
- Effective motor cooling due to discharge channel cast as part of the motor housing.
- Top outlet allowing the user to submerge the pump in a confined area.

## Performance

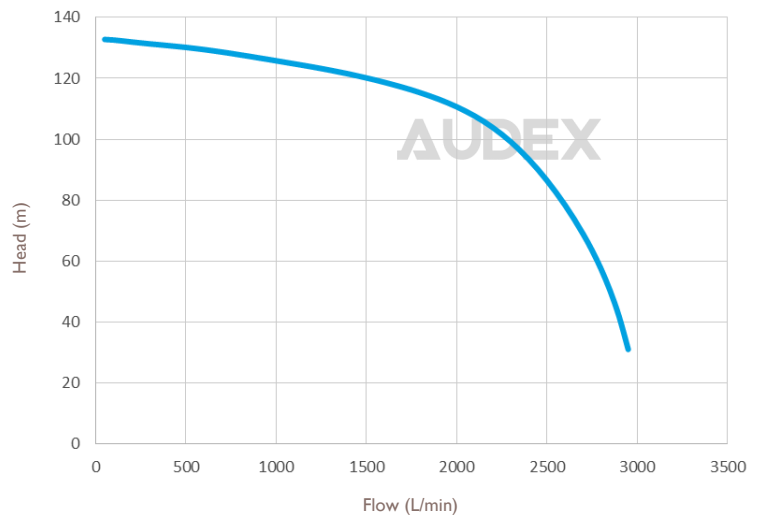

## Applications

- Mines, quarries, coal ore and slurries
- General pumping purposes
- Civil engineering
- Deep well pre dewatering or high head dewatering

# AUDEX

**Designed with your industry in mind**

**T:** +44 (0)800 118 2500  
**E:** [info@intraxglobal.com](mailto:info@intraxglobal.com)  
**W:** [audexpumps.com](http://audexpumps.com)

*Audex Pumps are part of the Intrax Global Group. 23.04.19*