


AS 8-1100 TC

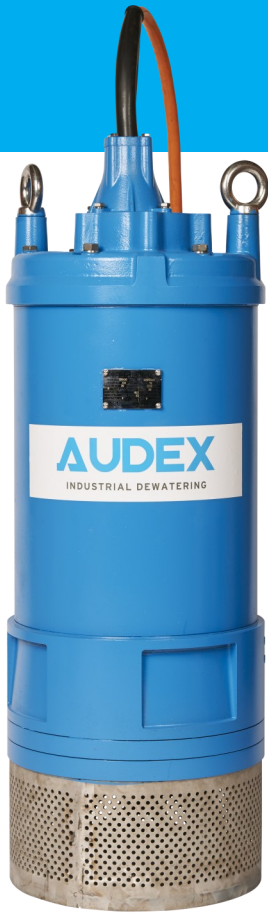

Specification


Model	Audex AS 8-1100 TC
Outlet	200mm
Motor Power	110kW 147.5HP
Rated Current	TBC
Max Capacity	6500l/min (390m ³ /h)
Max Head	103m
Impeller Passage	TBCmm
N.W	1150kg
G.W	TBCkg
Dimensions	592 x 1687mm

Pump photo is for illustrative purposes only

Description

- Rigid cast iron body and motor for long lasting durability.
- A greatly increased maximum submersion depth due to the mechanical seal being resistant to high pressure.
- Mechanical seal and motor cooled by the pumped medium even when the pump is only partially immersed.
- Effective motor cooling due to discharge channel cast as part of the motor housing.
- Top outlet allowing the user to submerge the pump in a confined area.

Performance

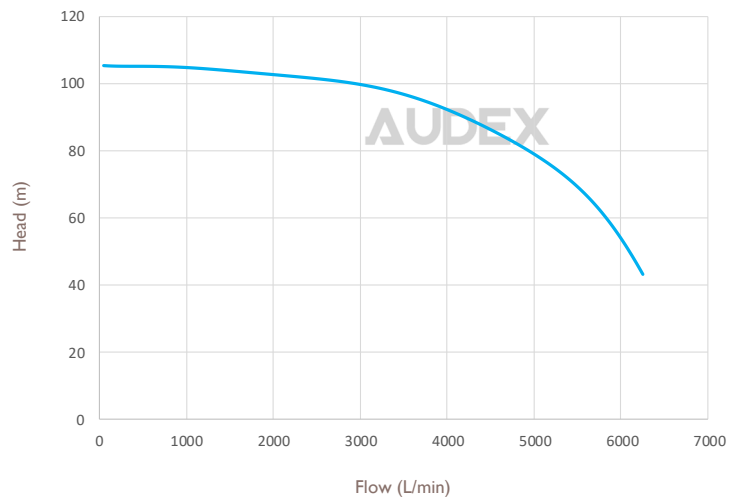

Applications

- Mines, quarries, coal ore and slurries
- General pumping purposes
- Civil engineering
- Deep well pre dewatering or high head dewatering

AUDEX

Designed with your industry in mind

T: +44 (0)800 118 2500

E: info@intraxglobal.com

W: audexpumps.com

Audex Pumps are part of the Intrax Global Group. 30.09.19.