

AS 8-5500 TC



Specification


Model	Audex AS 8-5500 TC
Outlet	200mm
Motor Power	55kW 75HP
Rated Current	98A
Max Capacity	6500L/min (390m ³ /h)
Max Head	65m
Impeller Passage	20mm
N.W	880kg
G.W	930kg
Dimensions	1810 x 620 x 940mm

Pump photo is for illustrative purposes only.

Description

- Rigid cast iron body and motor housing for long lasting durability.
- A greatly increased maximum submersion depth due to the mechanical seal being resistant to high pressure.
- Mechanical seal and motor cooled by the pumped medium even when the pump is only partially immersed.
- Effective motor cooling due to discharge channel cast as part of the motor housing.
- Top outlet allowing the user to submerge the pump in a confined area.

Performance

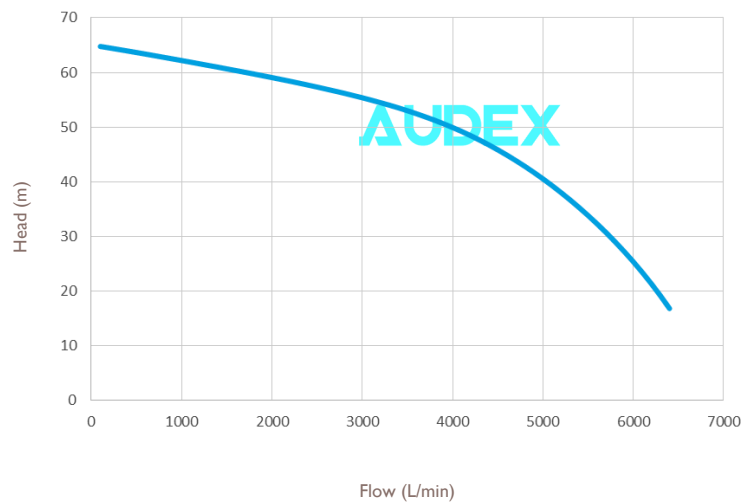

Applications

- Mines, quarries, coal ore and slurries
- General pumping purposes
- Civil engineering
- Deep well pre dewatering or high head dewatering

AUDEX

Designed with your industry in mind

T: +44 (0)800 118 2500
E: info@intraxglobal.com
W: audexpumps.com

Audex Pumps are part of the Intrax Global Group. 03.02.21