


AUDEX AW 2-150 TC

2" Submersible Dewatering Pump

- Cast iron made, heavy-duty slurry pump.
- An agitator is provided to assist smooth suction of the pumping fluid.
- The side-flow, top-discharge design keeps the motor cooling even if the pump is operated continuously with its motor exposed in air, and it makes the pump easier to be placed in a confined space.
- The pump is suitable for transferring or draining bentonite slurry used for slurry drilling, draining mixed water in civil engineering works or foundation works.
- Discharge: 50mm (2") Motor 1.5kW (2HP)

Audex are respected manufacturers of industrial submersible and vacprime self-priming dewatering pumps. Our pumps have been specifically developed for use in the toughest and most abrasive of applications and environments. Trusted by operators of quarries, mines and recycling facilities, Audex pumps represent quality and reliability giving you superior performance and reduced downtime. Pumps that suit your application better because they have been designed with your industry in mind.

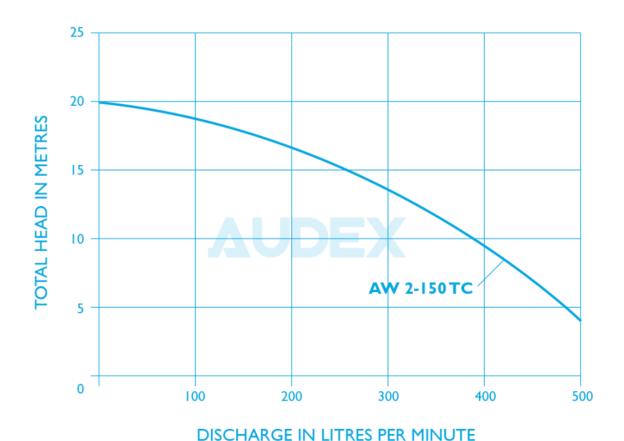

Audex - Designed with your industry in mind



AUDEX AW 2-150 TC

Specification

Capacity: up to 30m3/hr Head: up to 20m Discharge: 50mm (2") Power: 1.5kW (2HP)

Power supply: three phase 400V±10%, 50Hz

Insulation class: F Protection class: IP68 Cable length: 8m

Water temperature: up to 40°C

Max. water depth: 25m


Applications


Civil engineering
Mines, quarries, coal mine and slurries
Sewage treatment plants
General pumping purposes

Special Features on Request

Other voltages
The length of cable is optional

Dimensions



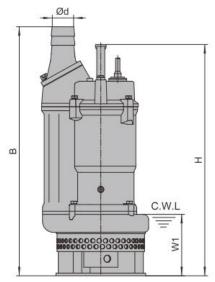

W1:Continuous running water level

D 50_{mm} 235mm Α ΑI 173mm 557mm В 216mm D Н 522mm WI 135mm N.W 37Kg G.W 41Kg

Packing dimension 610 x 265 x 265mm