


AUDEX AW 4-600 TC

4" Submersible Dewatering Pump

- Submersible slurry pump with a 4-pole motor for an increased lifetime and greater convenience.
- High chrome alloy impeller combined with agitator for pumping heavy slurry.
- Slim design with a top discharge enabling installation in smaller casing.
- For bentonite mixed water in foundation works or muddy water in civil engineering works.
- Discharge: I00mm (4") Motor 6kW (8HP)

Audex are respected manufacturers of industrial submersible and vac-prime self-priming dewatering pumps. Our pumps have been specifically developed for use in the toughest and most abrasive of applications and environments. Trusted by operators of quarries, mines and recycling facilities, Audex pumps represent quality and reliability giving you superior performance and reduced downtime. Pumps that suit your application better because they have been designed with your industry in mind.

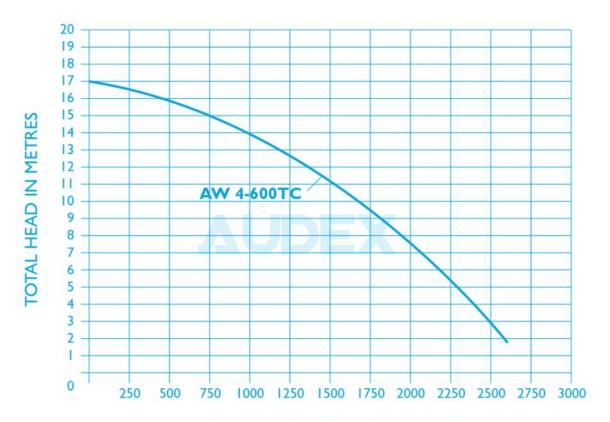

DISCHARGE IN LITRES PER MINUTE

Audex - Designed with your industry in mind



AUDEX AW 4-600 TC

Specification

Capacity: up to 150m3/hr Head: up to 16.9m Discharge: 100mm (4") Power: 6kW (8HP)

Power supply: three phase 380V±10%, 50Hz

Insulation class: F Protection class: IP68 Cable length: 8m

Water temperature: up to 40°C

Max. water depth: 15m


Applications


Civil engineering
Mines, quarries, coal ore and slurries
Sewage treatment plants
General pumping purposes
Pumping fluid: sludge, liquids - containing mud
and bentonite

Special Features on Request

Other voltages
The length of cable is optional

Dimensions





W1:Continuous running water level

D	I00mm
Α	415mm
ΑI	305mm
В	844mm
ВΙ	682mm
D	373mm
Н	730mm
WI	250mm
N.W	141Kg
G.W	151Kg

Packing dimension 470 x 410 x 985mm