

AW 6-1100TC



Specification


Model	Audex AW 6-1100 TC
Outlet	150mm
Motor Power	11kW 15HP
Rated Current (380V)	22A
Max Capacity	3900L/min (234m ³ /h)
Max Head	23m
Impeller Passage	30mm
N.W	197kg
G.W	210kg
Packing Dimensions	980 x 465 x 465

Pump photo is for illustrative purposes only.

Description

- Submersible slurry pump with a 4-pole motor for an increased lifetime and greater convenience.
- High chrome alloy impeller combined with agitator for pumping heavy slurry.
- Slim design with a top discharge enabling installation in smaller casing.

Performance

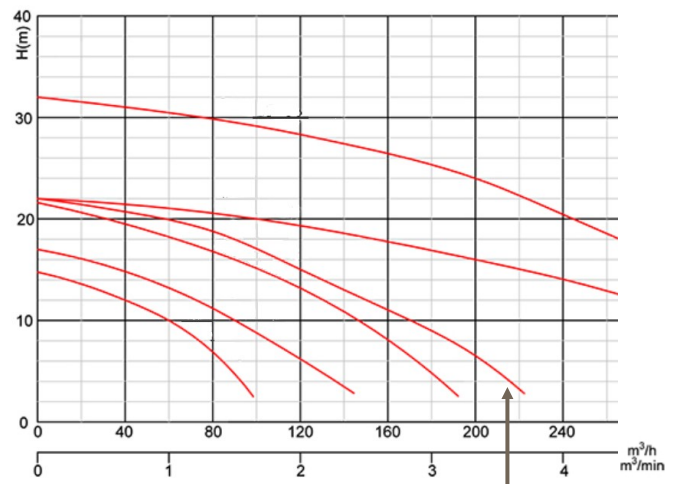

AW 6-1100 TC

Applications

- Civil engineering
- Mines, quarries, coal ore and slurries
- General pumping purposes
- Pumping fluid: sludge, liquids - containing mud and bentonite

AUDEX

Designed with your industry in mind

T: +44 (0)800 118 2500

E: info@intraxglobal.com

W: audexpumps.com

Audex Pumps are part of the Intrax Global Group. 10.01.20