


AUDEX AW 6-900 TC

6" Submersible Dewatering Pump

- Submersible slurry pump with a 4-pole motor for an increased lifetime and greater convenience.
- High chrome alloy impeller combined with agitator for pumping heavy slurry.
- Slim design with a top discharge enabling installation in smaller casing.
- For bentonite mixed water in foundation works or muddy water in civil engineering works.
- Discharge: I50mm (6") Motor 9kW (12HP)

Audex are respected manufacturers of industrial submersible and vacprime self-priming dewatering pumps. Our pumps have been specifically developed for use in the toughest and most abrasive of applications and environments. Trusted by operators of quarries, mines and recycling facilities, Audex pumps represent quality and reliability giving you superior performance and reduced downtime. Pumps that suit your application better because they have been designed with your industry in mind.

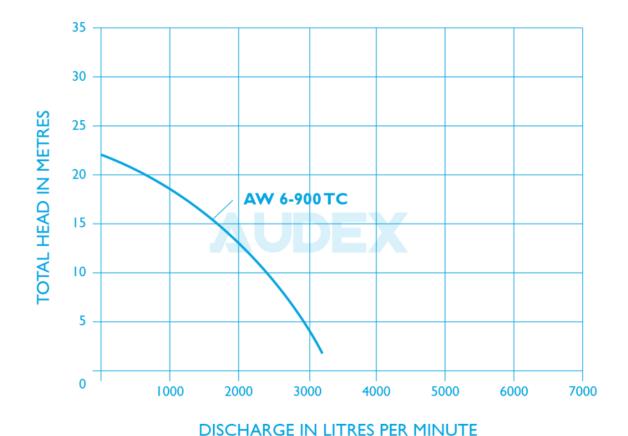

Audex - Designed with your industry in mind



AUDEX AW 6-900 TC

Specification

Capacity: up to 192m3/h Head: up to 21.5m Discharge: 150mm (6") Power: 9kW (12HP)

Power supply: three phase 380V±10%, 50Hz

Insulation class: F Protection class: IP68 Cable length: 8m

Water temperature: up to 40°C

Max. water depth: 15m


Applications


Civil engineering
Mines, quarries, coal ore and slurries
Sewage treatment plants
General pumping purposes
Pumping fluid: sludge, liquids - containing mud
and bentonite

Special Features on Request

Other voltages
The length of cable is optional

Dimensions



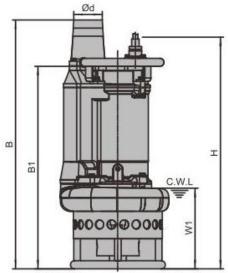

W1:Continuous running water level

D	I50mm
Α	434mm
ΑI	324mm
В	889mm
ВІ	727mm
D	407mm
Н	776mm
WI	250mm
N.W	171Kg
G.W	183Kg

Packing dimension 470 x 470 x 1045mm