




AUDEX AW 8-2200 TC

8" Submersible Dewatering Pump

- Submersible slurry pump with a 4-pole motor for an increased lifetime and greater convenience.
- High chrome alloy impeller combined with agitator for pumping heavy slurry.
- Slim design with a top discharge enabling installation in smaller casing.
- For bentonite mixed water in foundation works or muddy water in civil engineering works.
- Discharge: 200mm (8") Motor 22kW (30HP)

Audex are respected manufacturers of industrial submersible and vacprime self-priming dewatering pumps. Our pumps have been specifically developed for use in the toughest and most abrasive of applications and environments. Trusted by operators of quarries, mines and recycling facilities, Audex pumps represent quality and reliability giving you superior performance and reduced downtime. Pumps that suit your application better because they have been designed with your industry in mind.

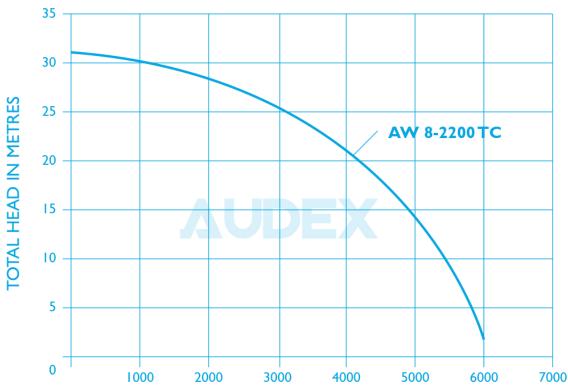

DISCHARGE IN LITRES PER MINUTE

Audex - Designed with your industry in mind



AUDEX AW 8-2200 TC

Specification

Capacity: up to 360m3/h Head: up to 32m Discharge: 200mm (8") Power: 22kW (30HP)

Power supply: three phase 380V±10%, 50Hz

Insulation class: F Protection class: IP68 Cable length: 10m

Water temperature: up to 40°C

Max. water depth: 15m


Applications


Civil engineering
Mines, quarries, coal ore and slurries
Sewage treatment plants
General pumping purposes
Pumping fluid: sludge, liquids - containing mud
and bentonite

Special Features on Request

Other voltages
The length of cable is optional

Dimensions



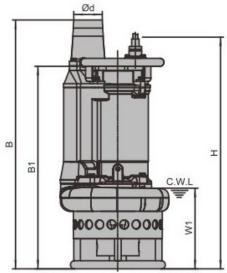

W1:Continuous running water level

D 200mm 578mm Α ΑI 442mm 1245mm В ВΙ 1015mm D 528mm Н 1200mm WI 330mm N.W 408Kg G.W 434Kg

Packing dimension 740 x 570 x 1460mm